



Light for
every space.
Smartly.™

20
—26
2027

CATALOGUS

LIGHTING SOLUTIONS FOR
EVERY ENVIRONMENT

CONTENTS	1
PRODUCT OVERVIEW	2
GU10 SPOT LIGHT	9
LED SPOT LIGHT	27
LED DOWN LIGHT	39
RECESSED LIGHT	51
SURFACE MOUNTED LIGHT	55
LED PENDANT LIGHT	67
LED CEILING LIGHT INDOOR	72
48V LED TRACK LIGHT	82
3-CIRCUIT LED TRACK LIGHT	94
1-CIRCUIT LED TRACK LIGHT	113
LED STEP LIGHT	122
LED WALL LIGHT INDOOR	130
LED MIRROR LIGHT BATHROOM	135
LED PANEL LIGHT	137
LED LINEAR LIGHT OFFICE	147
LED TUBES AND BATTEN	149
LED SPORT LIGHTING INDOOR	157
LED LINEAR TRUNK LIGHT	160
LED EMERGENCY LIGHT	171
LED STRIP LIGHT	175
ALUMINIUM PROFILE FOR LED STRIP LIGHT	190
DRIVERS AND CONTROLLERS FOR LED STRIP LIGHT	299
LED BULKHEAD OUTDOOR & INDOOR	202
LED WATERPROOF LIGHT	213
LED HIGH BAY LIGHT	224
LED FLOOD LIGHT AND LED STREET LIGHT	229
LED WALL LIGHT OUTDOOR	235
LED GROUND LIGHT AND WALL WASHER	244
LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT	252
LED SPORT FIELD LIGHT OUTDOOR	268
INDEX	302
CONTACT	306

GU10 SPOT LIGHT



BEAM 0006 P009



BEAM 0406 P010




BEAM 0010 P011



BEAM 0410 P012



BEAM 0706 P013



BEAM 0707 P014



BEAM 0111 P015



BEAM 0112 P016



BEAM 0262 P017



BEAM 0011 P018



BEAM 0012 P019



BEAM 0362 P020



BEAM 0408 P021



BEAM 0048 P022



BEAM 0708 P023



BEAM 0709 P024



BEAM 0017 P025



LED LAMP P026



LED LAMP P026



LED LAMP P026



LED LAMP P026

LED SPOT LIGHT



BEAM 0024 P027



BEAM 0021 P028



BEAM 0025 P029



BEAM 0670 P030



BEAM 0671 P031



BEAM 1268 P033



BEAM 1246 P034



BEAM 1247 P035



BEAM 1248 P036



BEAM 1249 P037



LED DRIVER P038

LED DOWN LIGHT



BEAM 3107 P039



BEAM 3111 P040



BEAM 0409 P041



BEAM 0022 P042



BEAM 0608 P043



BEAM 0609 P044



BEAM 0610 P045



BEAM 0698 P046



BEAM 0699 P047



BEAM 0729 P048



BEAM 1298 P049



LED DRIVER P050

RECESSED, SURFACE MOUNTED AND LED PENDANT LIGHT



BEAM 0115 P051



BEAM 0026 P052



BEAM 0715 P053



BEAM 0041 P054



BEAM 0027 P055



BEAM 0734 P056



BEAM 0544 P057



BEAM 0545 P058



BEAM 0751 P059



BEAM 0752 P060



BEAM 0746 P061



BEAM 0040 P062



BEAM 0551 P063



BEAM 0042 P064



BEAM 0043 P065



BEAM 0044 P066



BEAM 0717 P067



BEAM 0719 P068



BEAM 0710 P069



BEAM 0718 P070



BEAM 0720 P071

LED CEILING LIGHT INDOOR



BEAM 0722 P072



BEAM 0725 P073



BEAM 0744 P074



BEAM 0735 P075



BEAM 0045 P076



BEAM 0730 P077



BEAM CIRCLE P079

48V LED TRACK LIGHT



SOTTILE 25 P082



SOTTILE 40 P083



SOTTILE 50 P084



BANDA P085



LENTIGGINI P086



SALINA P087



TRACK RAIL MOUNTED P088



TRACK RAIL DEEP P089



TRACK RAIL RECESSED P090

3-CIRCUIT LED TRACK LIGHT



BEAM 0028 P094



BEAM 0029 P095



BEAM 0114 P096



BEAM 0103 P097



BEAM 0105 P098



BEAM 0705 P099



BEAM 0714 P100



BEAM 0603 P101



BEAM 0605 P102



BEAM 0607 P103



BEAM 0702 P104



TRACK RAILS P105

1-CIRCUIT LED TRACK LIGHT



BEAM 0673 P113



BEAM 0674 P114



BEAM 0675 P115



BEAM 0676 P116



BEAM 0677 P117



TRACK RAILS P118

LED STEP LIGHT



BEAM R6020-3W P123



BEAM R6020-3W-S P124



BEAM 0039 P126



BEAM 0039-S P127



BEAM R6010 P128



BEAM 0350 P129

LED WALL LIGHT INDOOR



BEAM 0036 P130



BEAM 0035 P131



BEAM 0037 P132



BEAM 0038 P133



BEAM 0034 P134

LED MIRROR LIGHT BATHROOM



BEAM 6008 P135



BEAM 0552 P136

LED PANEL LIGHT



BEAM 0204 P138



BEAM 0206 P139



BEAM 0520 P40



BEAM 3118 P141



BEAM 3098 P143



BEAM 0490C P144



BEAM 0493C P145



DRIVERS P146

LED LINEAR LIGHT OFFICE



BEAM 0030 P147


LED TUBES AND BATTEN



BEAM 0704 P150



BEAM 3047 P151



BEAM S3050 P153



BEAM S3051 P155



BEAM S3052 P156

LED SPORT LIGHTING INDOOR



BEAM S3000 P159

LED LINEAR TRUNK LIGHT



BEAM S3061 P167



BEAM S3070 P168

LED EMERGENCY LIGHT



BEAM 3012 P172



BEAM 3012 OL P172



BEAM 3013 P172



BEAM 3014 P172



BEAM 3015 P172



BEAM 3016 P172



BEAM 3017 P173



BEAM 3053 P174



BEAM 3054 P174



BEAM 3055 P174

LED STRIP LIGHT



BEAM 1302 COB P175



BEAM 1222 COB P176



BEAM 1221 COB P177



BEAM 1279 COB P178



BEAM 1221 P179



BEAM 1222 P180



BEAM 1263 P181



BEAM 1279 P182




BEAM 1223 P183



BEAM 1321 COB P184



CONNECTOR P185



BEAM 1281 COB P186



BEAM 1282 P187



BEAM 1353 P188



BEAM 1352 P189

ALUMINUM PROFILE FOR LED STRIP LIGHT



BEAM 1224 P190



BEAM 1225 P191




BEAM 1226 P192



BEAM 1227 P193



BEAM 1230 P194



BEAM 1296 P195



BEAM 1340 P196



BEAM 1331 P197



BEAM 1337 P198

DRIVERS AND CONTROLLERS FOR LED STRIP LIGHT



DRIVERS 24V P199



BEAM 1254 P200



BEAM 1280 P200



BEAM 1253 P200



BEAM 1256 P200



BEAM 1257 P201



BEAM 1380 P201



BEAM 1381 P201



BEAM 1382 P201



BEAM 1360 P201



BEAM 1361 P201

LED BULKHEAD OUTDOOR & INDOOR



BEAM 0841 P202



BEAM 0842 P203



BEAM 2033 P204



BEAM 3085 P205



BEAM 3089 P206



BEAM 0727 P207



BEAM 3094 P209



BEAM 3076 P210



BEAM 3080 P211



BEAM 2013 P212

LED WATERPROOF LIGHT



BEAM 0449 P213



BEAM 0473 P215



BEAM 3026 P216



BEAM S3127 P217



BEAM S3032 P219



BEAM S3036 P220



BEAM S3040 P221



BEAM S3043 P223

LED HIGH BAY LIGHT



BEAM 0514 P225



BEAM 3018 P226



BEAM S3021 P227



BEAM S3072 P228



BEAM S3073 P228



BEAM S3074 P228



BEAM S3075 P228

LED FLOOD LIGHT AND LED STREET LIGHT



BEAM 0685 P229



BEAM 0783 P229



BEAM 3004 P232



BEAM 3120 P234

LED WALL LIGHT OUTDOOR



BEAM 0150B P236



BEAM 0008B P237



BEAM 0009B P238



BEAM 0015B P239



BEAM 0016B P240



BEAM 0640 P242



BEAM 0641 P243

LED GROUND LIGHT AND WALL WASHER



BEAM 0220 P244



BEAM 0211 P245



BEAM 0212 P246



BEAM 0213 P247



BEAM 0049 P248



BEAM 0218 P249



BEAM S3201 P250



BEAM S3208 P251

LED BOLLARD - LIGHT PILLAR LIGHT - GARDEN LIGHT



BEAM 0241B P252



BEAM 0231B P253



BEAM R9004 P254



BEAM R9005 P255



BEAM S9008 P256



BEAM S6015 P257



BEAM S6014 P258



BEAM S6003 P259



BEAM S6002 P260



BEAM S6017 P261



BEAM S6001 P262



BEAM S6004 P263



BEAM S3129 P265



BEAM 9006 P267

LED SPORT FIELD LIGHT OUTDOOR



SIRIUS 720W P270



SIRIUS 1080W P271



SIRIUS 1440W P272



SIRIUS 1800W P273



VEGA 150W P276



VEGA 300W P277



VEGA 450W P278



VEGA 600W P279



VEGA 750W P280



VEGA 900W P281



VEGA 1200W P282



VEGA 1500W P283



REGULUS 300W P286



REGULUS 600W P287



RIGEL 120W P290



RIGEL 240W P291



RIGEL 360W P292



RIGEL 480W P293



RIGEL 720W P294



RIGEL 960W P295



ALPHA P297




This symbol indicates that the product is a special order item, with a delivery time of at least 12 weeks.



BEAM 0006/0006W/0006B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

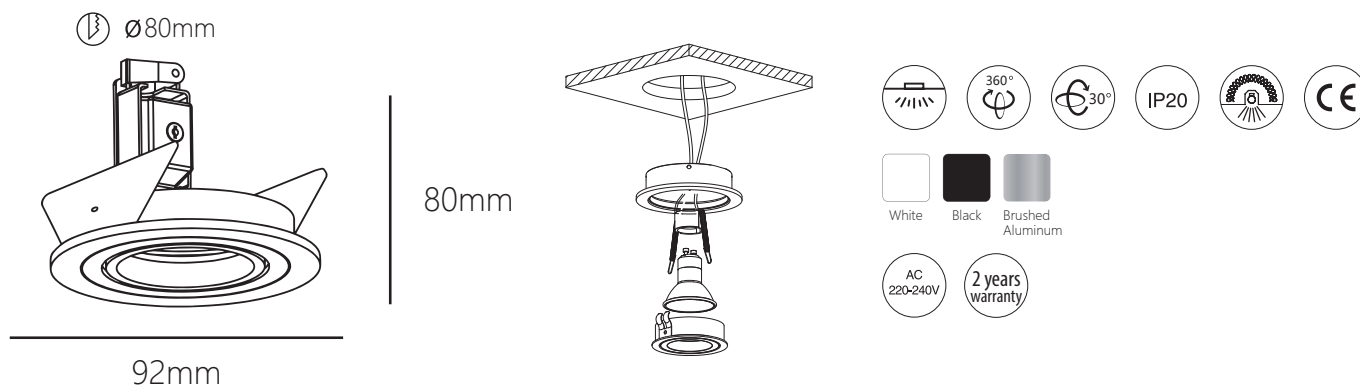

PRODUCT FEATURES

Aluminium round recessed spotlight

Leaf springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0006W	White	GU10	Exclusive	Max. 10W	Ø 92 x 80mm	Ø 80mm
Beam 0006B	Black	GU10	Exclusive	Max. 10W	Ø 92 x 80mm	Ø 80mm
Beam 0006	Brushed Aluminum	GU10	Exclusive	Max. 10W	Ø 92 x 80mm	Ø 80mm



BEAM 0406W/0406B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

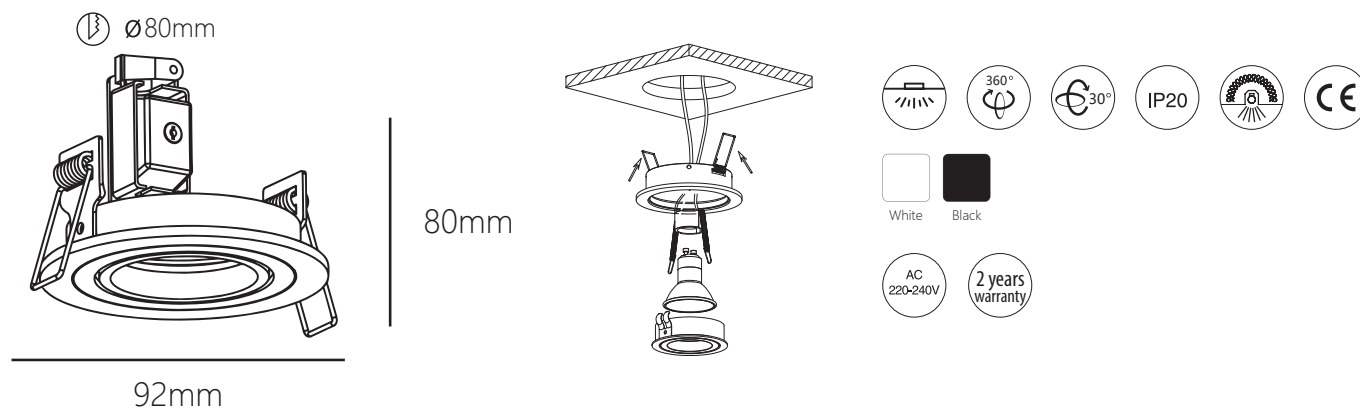

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0406W	White	GU10	Exclusive	Max. 10W	Ø 92 x 80mm	Ø 80mm
Beam 0406B	Black	GU10	Exclusive	Max. 10W	Ø 92 x 80mm	Ø 80mm



BEAM 0010/0010W/0010B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

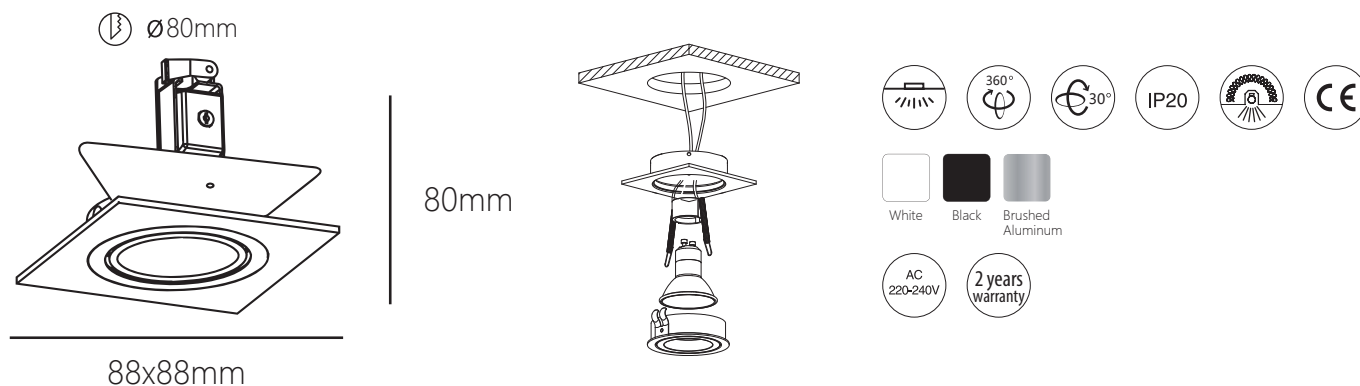

PRODUCT FEATURES

Aluminium square recessed spotlight

Leaf springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0010W	White	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 80mm
Beam 0010B	Black	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 80mm
Beam 0010	Brushed Aluminum	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 80mm



BEAM 0410W/0410B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

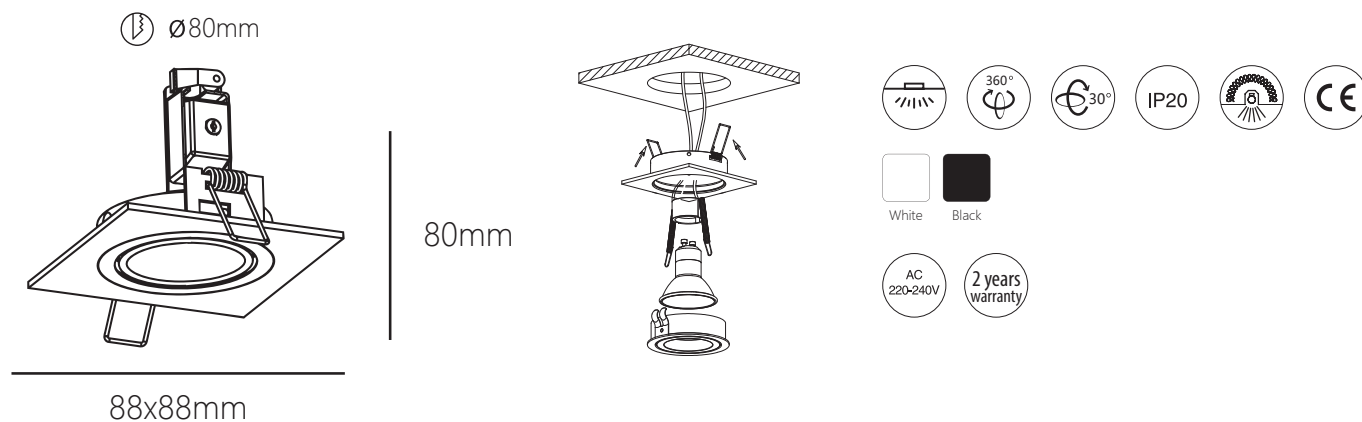

PRODUCT FEATURES

Aluminium square recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting





Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0410W	White	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 80mm
Beam 0410B	Black	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 80mm



BEAM 0706W/0706B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

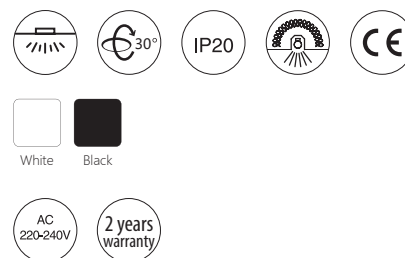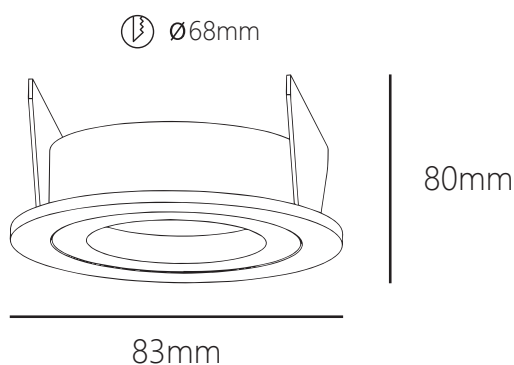

PRODUCT FEATURES

Aluminium round recessed spotlight

Leaf springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting





Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0706W	White	GU10	Exclusive	Max. 10W	Ø83 x 80mm	Ø 68mm
Beam 0706B	Black	GU10	Exclusive	Max. 10W	Ø83 x 80mm	Ø 68mm



BEAM 0707W/0707B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

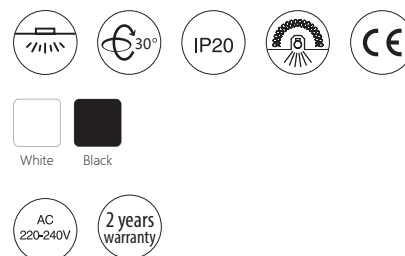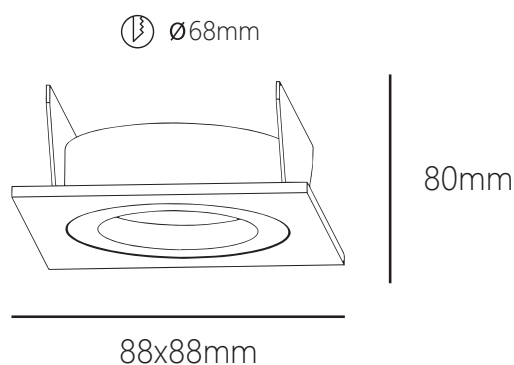

PRODUCT FEATURES

Aluminium square recessed spotlight
Leaf springs
Connection: Loop in / Loop out
Push terminals fast installation
Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0707W	White	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 68mm
Beam 0707B	Black	GU10	Exclusive	Max. 10W	88x88x80mm	Ø 68mm



BEAM 0111W/0111B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

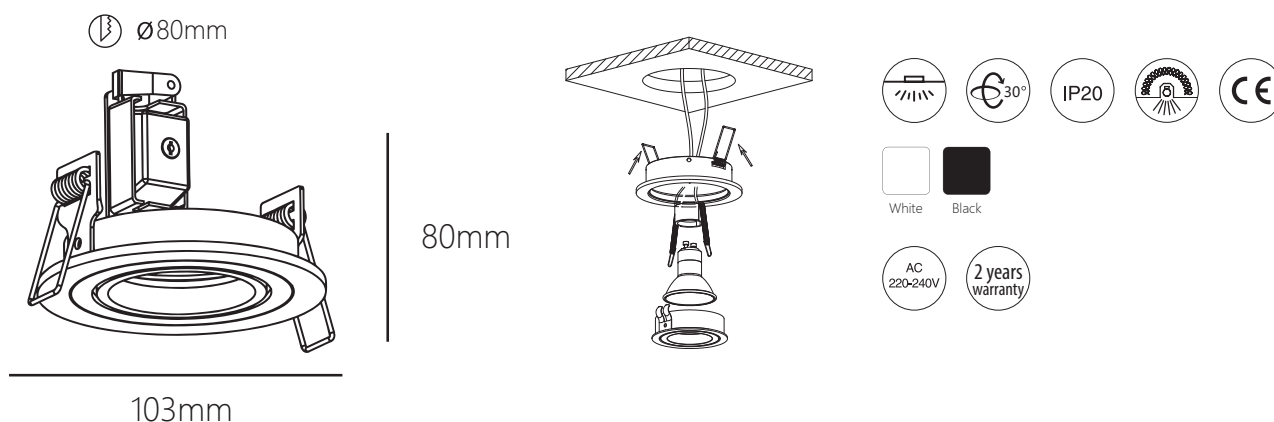

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0111W	White	GU10	Exclusive	Max. 10W	Ø 103 x 80mm	Ø 80mm
Beam 0111B	Black	GU10	Exclusive	Max. 10W	Ø 103 x 80mm	Ø 80mm




BEAM 0112/0112W

DECORATIVE LIGHTING
GU10 SPOT LIGHT


Ø80mm



80mm



103x103mm

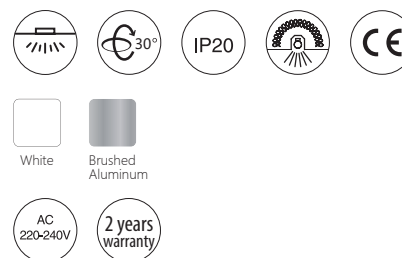

PRODUCT FEATURES

Aluminium square recessed spotlight
Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0112	Aluminium	GU10	Exclusive	Max. 10W	103x103x80mm	Ø 80mm
Beam 0112W	White	GU10	Exclusive	Max. 10W	103x103x80mm	Ø 80mm



BEAM 0262W/0262B


DECORATIVE LIGHTING
GU10 SPOT LIGHT

Ø 92mm



65mm

105mm

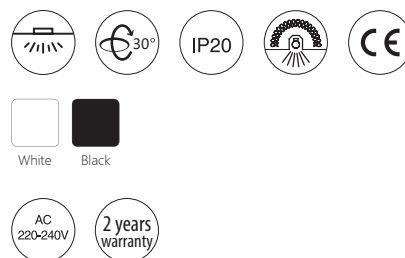

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0262W	White	GU10	Exclusive	Max. 10W	105x65mm	Ø 92mm
Beam 0262B	Black	GU10	Exclusive	Max. 10W	105x65mm	Ø 92mm



BEAM 0011W/0011B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

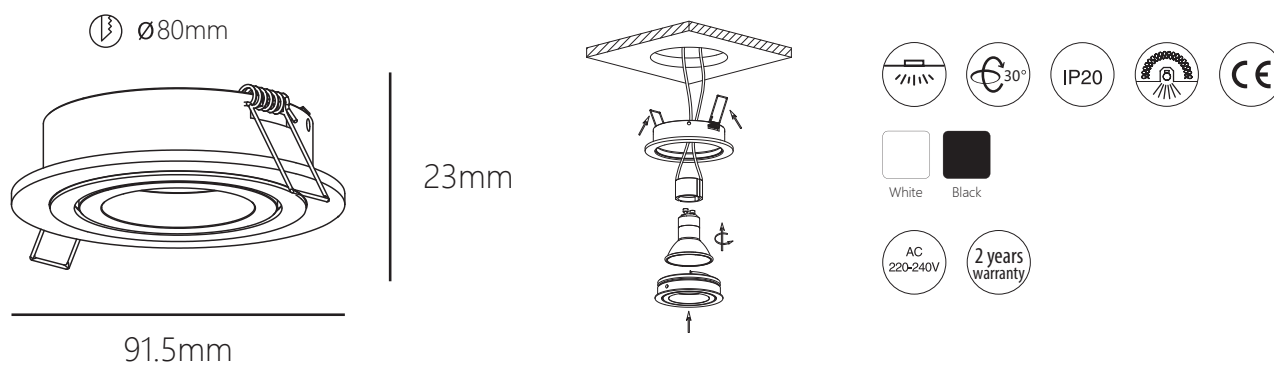


PRODUCT FEATURES

Aluminium round recessed spotlight
Springs
Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0011W	White	GU10	Exclusive	Max. 10W	Ø 91.5 x 23mm	Ø 80mm
Beam 0011B	Black	GU10	Exclusive	Max. 10W	Ø 91.5 x 23mm	Ø 80mm

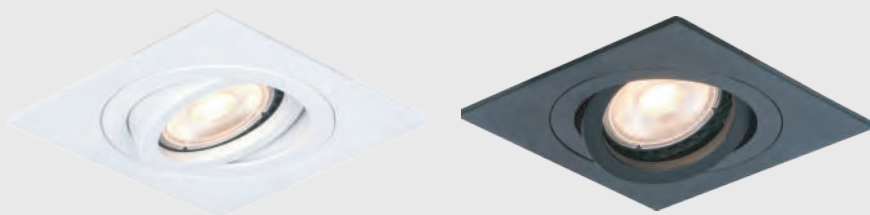

BEAM 0012W/0012B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

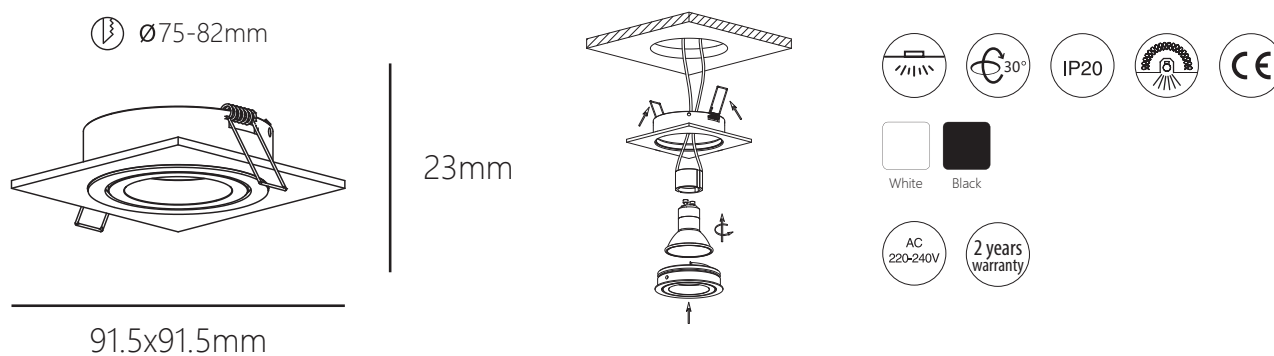

PRODUCT FEATURES

Aluminium square recessed spotlight
Springs
Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0012W	White	GU10	Exclusive	Max. 10W	91.5x91.5x23mm	Ø 75-82mm
Beam 0012B	Black	GU10	Exclusive	Max. 10W	91.5x91.5x23mm	Ø 75-82mm




BEAM 0362W/0362B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

Ø90mm



63mm



White

Black



AC
220-240V

2 years
warranty

99mm

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0362W	White	GU10	Exclusive	Max. 10W	Ø 99x63mm	Ø 90mm
Beam 0362B	Black	GU10	Exclusive	Max. 10W	Ø 99x63mm	Ø 90mm



BEAM 0408W/0408B/0408


DECORATIVE LIGHTING
GU10 SPOT LIGHT

Ø45mm



39.5mm

55mm



PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Push terminal blocks fast installation

Area of application: interior lighting





Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0408W	White	GU10	Exclusive	Max. 10W	Ø 55x39.5mm	Ø 45mm
Beam 0408B	Black	GU10	Exclusive	Max. 10W	Ø 55x39.5mm	Ø 45mm
Beam 0408	Brushed Aluminum	GU10	Exclusive	Max. 10W	Ø 55x39.5mm	Ø 45mm



BEAM 0048W/0048B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

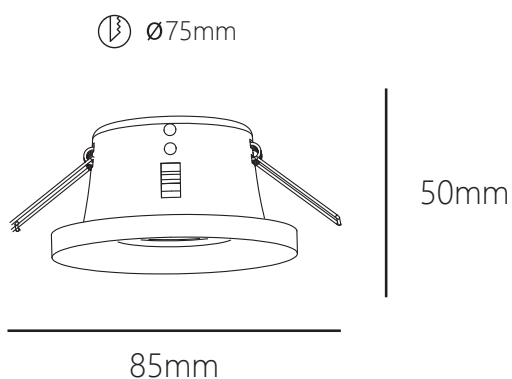

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting




Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0048W	White	GU10	Exclusive	Max. 10W	Ø 85x50mm	Ø 75mm
Beam 0048B	Black	GU10	Exclusive	Max. 10W	Ø 85x50mm	Ø 75mm



BEAM 0708W/0708B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

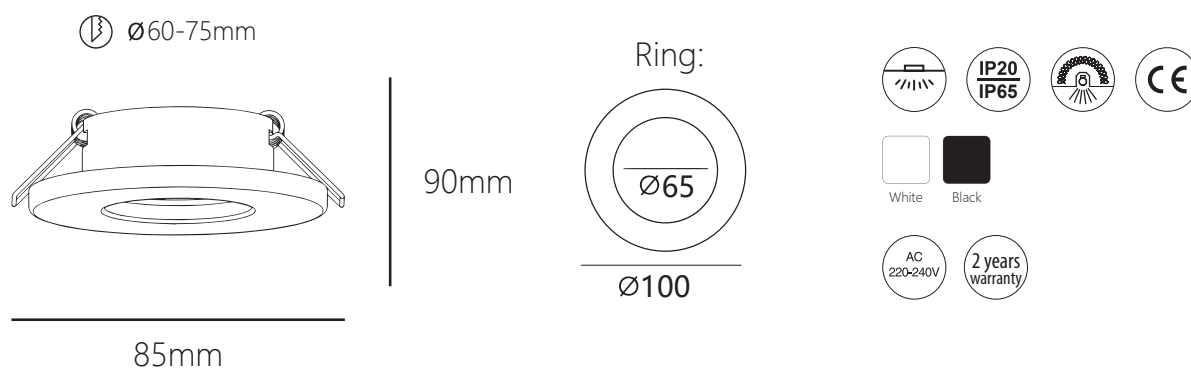

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting

Extra bigger rings for bigger cut-out

BEAM 0017.1W / BEAM 0017.1B





Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0708W	White	GU10	Exclusive	Max. 10W	Ø 85x90mm	Ø 60-75mm
Beam 0708B	Black	GU10	Exclusive	Max. 10W	Ø 85x90mm	Ø 60-75mm
Beam 0017.1W	White				Ø 100mm	Ø 60-90mm
Beam 0017.1B	Black				Ø 100mm	Ø 60-90mm



BEAM 0709W/0709B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

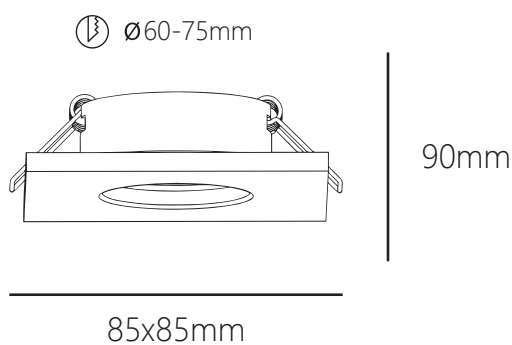

PRODUCT FEATURES

Aluminium square recessed spotlight
Springs
Connection: Loop in / Loop out
Push terminals fast installation
Area of application: interior lighting



Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0709W	White	GU10	Exclusive	Max. 10W	85x85x90mm	Ø 60-75mm
Beam 0709B	Black	GU10	Exclusive	Max. 10W	85x85x90mm	Ø 60-75mm




BEAM 0017W/0017B

DECORATIVE LIGHTING
GU10 SPOT LIGHT

Ø 60-75mm


Ø 60-90mm



101mm

78mm

Ring:



White

Black



AC
220-240V

2 years
warranty

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

Area of application: interior lighting

Extra bigger rings for bigger cut-out

BEAM 0017.1W / BEAM 0017.1B



Code	Color	Lampholder	GU10 LED	Power	Diameter x height	Cut-out
Beam 0017W	White	GU10	Exclusive	Max. 10W	Ø 78x101mm	Ø 60-75mm
Beam 0017B	Black	GU10	Exclusive	Max. 10W	Ø 78x101mm	Ø 60-75mm
Beam 0017.1W	White				Ø 100mm	Ø 60-90mm
Beam 0017.1B	Black				Ø 100mm	Ø 60-90mm



LED LAMP



GU10/5/2700 PL

GU10/5/3000 PL



Power: 5W
Material: Aluminium+PC
Size: Ø50xH56mm
Lumen: 550LM
TRIAC Dimmable
Beam angle: 38°
Input: 220-240V / 50Hz
CRI>80
LED Chip
Lampholder: GU10
CCT: 2700 or 3000K



GU10/5/2700 GLASS

GU10/5/3000 GLASS

Power: 5W
Material: Glass
Size: Ø50xH53mm
Lumen: 550LM
TRIAC Dimmable
Beam angle: 38°
Input: 220-240V / 50Hz
CRI>80
LED Chip
Lampholder: GU10
CCT: 2700 or 3000K



E27/6W/108

Code	E27/6W/108
DxH	64x108mm
Dimmable	Yes
Power	6W
Voltage	220-240V 50-60Hz
Lampholder	E27
CCT	2700K
CRI	> 80
Lumen	550Lm
Beam angle	360°
Expected lifetime	20.000 hours



E27/6W/140

Code	E27/6W/140
DxH	64x140mm
Dimmable	Yes
Power	6W
Voltage	220-240V 50-60Hz
Lampholder	E27
CCT	2700K
CRI	> 80
Lumen	550Lm
Beam angle	360°
Expected lifetime	20.000 hours





E27/7W/3000

Code	E27/7W/3000
DxH	32x99mm
Dimmable	Yes
Power	6W
Voltage	220-240V 50-60Hz
Lampholder	E27
CCT	3000K
CRI	> 80
Lumen	550Lm
Beam angle	360°
Expected lifetime	20.000 hours



BEAM 0024W/0024B

DECORATIVE LIGHTING
LED SPOT LIGHT

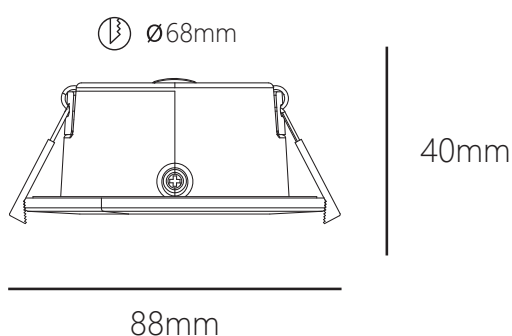

CCT dip switch changeable

2700K 3000K 4000K

PRODUCT FEATURES

Plastic round recessed spotlight
Springs

Connection: Loop in / Loop out

Push terminals fast installation

TRIAC Dimmable

3CCT Dip Switch adjustable (2700K-3000K-4000K)





Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size	Cut-out
Beam 0024W	White	8W	800Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	Ø 88x40mm	Ø 68mm
Beam 0024B	Black	8W	800Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	Ø 88x40mm	Ø 68mm



BEAM 0021W/0021B

DECORATIVE LIGHTING
LED SPOT LIGHT

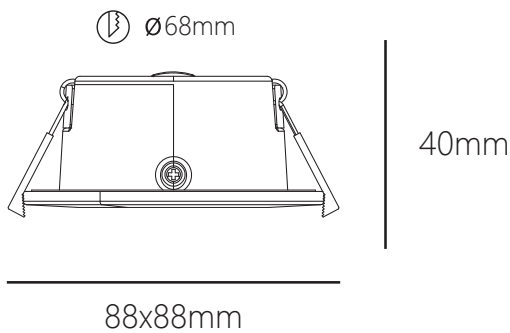

PRODUCT FEATURES

Plastic square recessed spotlight
Springs

Connection: Loop in / Loop out

Push terminals fast installation

TRIAC Dimmable

3CCT Dip Switch adjustable (2700K-3000K-4000K)



CCT dip switch changeable


2700K 3000K 4000K

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size	Cut-out
Beam 0021W	White	8W	800Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	88x88x40mm	Ø 68mm
Beam 0021B	Black	8W	800Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	88x88x40mm	Ø 68mm



BEAM 0025W/0025B

DECORATIVE LIGHTING
LED SPOT LIGHT

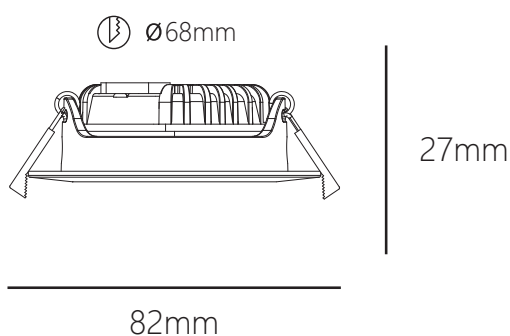

PRODUCT FEATURES

Aluminium round recessed spotlight

Springs

Connection: Loop in / Loop out

Push terminals fast installation

TRIAC Dimmable


Dim to Warm 3000K-2000K

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size	Cut-out
Beam 0025W	White	6W	600Lm	>80	TRIAC	Dim to Warm 3000K-2000K	Ø 82x27mm	Ø 68mm
Beam 0025B	Black	6W	600Lm	>80	TRIAC	Dim to Warm 3000K-2000K	Ø 82x27mm	Ø 68mm




BEAM 0670W/0670B

DECORATIVE LIGHTING
LED SPOT LIGHT



45mm

46mm

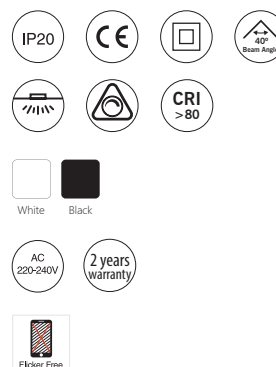

PRODUCT FEATURES

Aluminium round recessed spotlight

Leaf springs


TRIAC Dimmable

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size	Cut-out
Beam 0670W	White	4W	300Lm	>80	TRIAC	3000K	Ø 46x45mm	Ø 35mm
Beam 0670B	Black	4W	300Lm	>80	TRIAC	3000K	Ø 46x45mm	Ø 35mm



BEAM 0671W/0671B

DECORATIVE LIGHTING
LED SPOT LIGHT

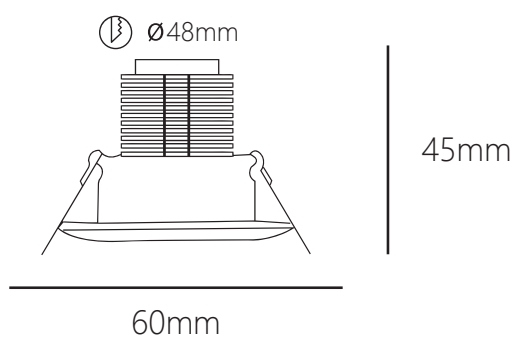

PRODUCT FEATURES


Aluminium round recessed spotlight

Springs

TRIAC Dimmable

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size	Cut-out
Beam 0671W	White	4W	300Lm	>80	TRIAC	3000K	Ø 60x45mm	Ø 48mm
Beam 0671B	Black	4W	300Lm	>80	TRIAC	3000K	Ø 60x45mm	Ø 48mm

LED Module concept


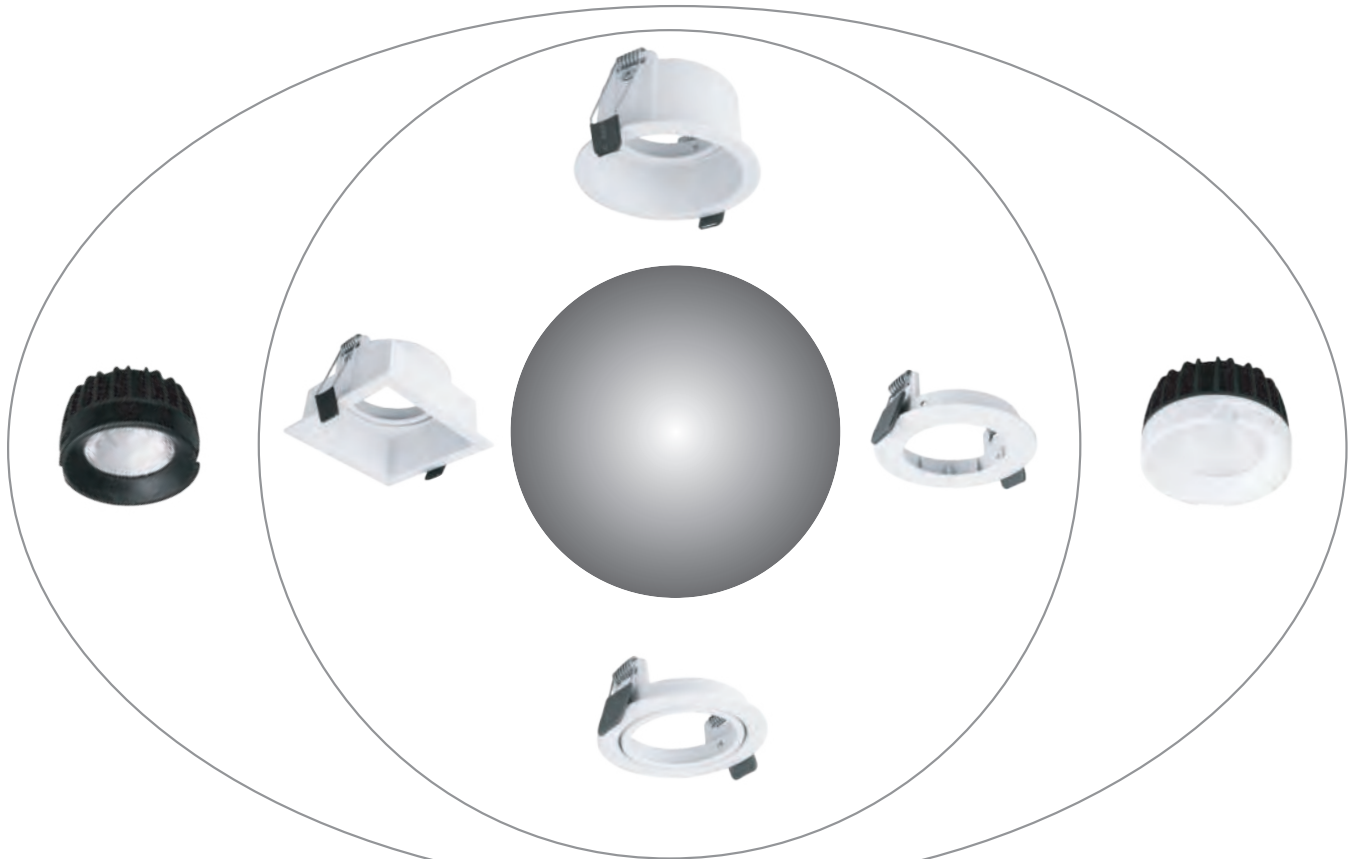


Light source + Frames Changeable
4 different frames for different use



BEAM 1268W/1268B BEAM 1270W/1270B

DECORATIVE LIGHTING
LED SPOT LIGHT

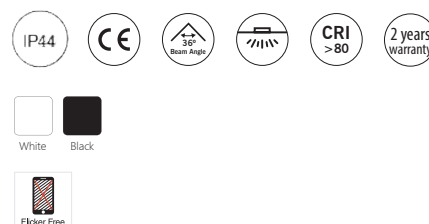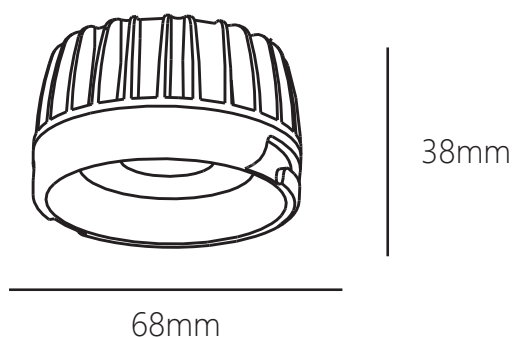

PRODUCT FEATURES

Input Voltage: 36Vdc

Input current: 250mA 10W / 200mA 8W / 150mA 6W / 135mA 5W


NON-DIMMABLE / TRIAC / DALI

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 1268W	White	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	3000K	Ø 68x38mm
Beam 1268B	Black	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	3000K	Ø 68x38mm
Beam 1270W	White	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	2700K	Ø 68x38mm
Beam 1270B	Black	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	2700K	Ø 68x38mm





BEAM 1246W/1246B

DECORATIVE LIGHTING
LED SPOT LIGHT



45mm



87mm

PRODUCT FEATURES

Input current: 250mA 10W / 200mA 8W
150mA 6W / 135mA 5W

NON-DIMMABLE / TRIAC / DALI




Code	Color	Power	Lumen	CRI	Dimmable	Light source	Size
Beam 1246W	White	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	Ø 87x45mm
Beam 1246B	Black	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	Ø 87x45mm




BEAM 1247W/1247B

DECORATIVE LIGHTING
LED SPOT LIGHT



50mm



PRODUCT FEATURES

Input current: 250mA 10W / 200mA 8W
150mA 6W / 135mA 5W

NON-DIMMABLE / TRIAC / DALI





Code	Color	Power	Lumen	CRI	Dimmable	Light source	Size
Beam 1247W	White	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	Ø 90x50mm
Beam 1247B	Black	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	Ø 90x50mm



BEAM 1248W/1248B

DECORATIVE LIGHTING
LED SPOT LIGHT




PRODUCT FEATURES

Input current: 250mA 10W / 200mA 8W
150mA 6W / 135mA 5W

NON-DIMMABLE / TRIAC / DALI




Code	Color	Power	Lumen	CRI	Dimmable	Light source	Size
Beam 1248W	White	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	Ø 90x68mm
Beam 1248B	Black	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	Ø 90x68mm

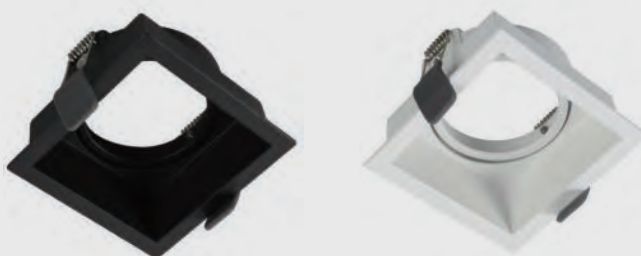



BEAM 1249W/1249B

DECORATIVE LIGHTING
LED SPOT LIGHT



90x90mm

68mm

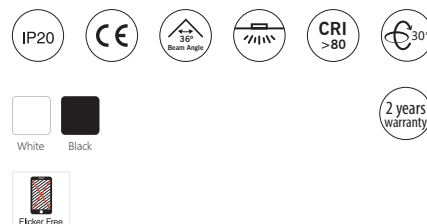

PRODUCT FEATURES

Input current: 250mA 10W / 200mA 8W
150mA 6W / 135mA 5W

NON-DIMMABLE / TRIAC / DALI



Code	Color	Power	Lumen	CRI	Dimmable	Light source	Size
Beam 1249W	White	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	90x90x68mm
Beam 1249B	Black	10W	900Lm	>80	NON-DIMMABLE / TRIAC / DALI	Beam 1268/1270	90x90x68mm



Beam 1283



Beam 1269



Beam 1267



Beam 1284

BEAM 1267/1269/1283/1284

DECORATIVE LIGHTING
LED SPOT LIGHT

PRODUCT FEATURES

TO be ordered separately:

LED-module

(Beam 1268/1270)

Recessed spotlight

(Beam 1246/1247/1248/1249)


IP 20

Voltage 220-240V 50-60HZ




TECHNICAL DATA

Code	Power	Current	Output Voltage	Dimensions LxWxH	Dimmable
Beam 1283	6W	135mA	28-42Vdc	96x36x24mm	Nee
Beam 1269	10W	250mA	28-42Vdc	96x36x24mm	Nee
Beam 1267	8-15W	200mA - 350mA	25-42Vdc	123x46x30mm	TRIAC
Beam 1284	9-24W	225mA - 600mA	24-42Vdc	117x45.5x29mm	DALI




BEAM 3107/3108/3109/3110

INDUSTRIAL LIGHTING
LED DOWN LIGHT



B mm



AC
220-240V

PF≥0.9

CRI≥80



CCT dip switch changeable

3000K

4000K

5700K


PRODUCT FEATURES

This SMD downlight is with high lumen efficiency 130lm/w as external driver, The concave design in front and reflector+ens optic combination reduced the height of the lamp and make it anti-glare. Besides, can do surface mounted with extra accessory for 4/6/8 inches. More function as CCT adjustable, sensor available, one lamp with multiple function use.

MATERIALS OF HOUSING : ALUMINIUM DIE-CAST-
MATERIALS OF OPTICS : PC+ALUMINIUM




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	CCT
Beam 3107	12W	Ø145x55	Ø120-130	140 LM/W	3CCT (3000K-4000K-5700K)
Beam 3108	16W	Ø170x58	Ø140-150	140 LM/W	3CCT (3000K-4000K-5700K)
Beam 3109	24W	Ø190x61	Ø160-170	140 LM/W	3CCT (3000K-4000K-5700K)
Beam 3110	30W	Ø228x61	Ø200-210	140 LM/W	3CCT (3000K-4000K-5700K)




BEAM 3111/3112/3113/3114 BEAM 3130/3131/3132

INDUSTRIAL LIGHTING
LED DOWN LIGHT



B mm

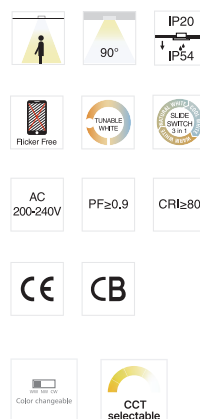

PRODUCT FEATURES

This LED downlight is with high lumen SMD LED, external driver is available for triac dim, 0~10V and DALI, IP54 IK06 protection level. CCT changeable by slide switch is available. Full size from 2.5 inch to 8 inch are all available.

MATERIALS OF HOUSING : ALUMINIUM
MATERIALS OF OPTICS : PC

CCT dip switch changeable




3000K 4000K 5700K

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	CCT
Beam 3111	7W	Ø86x39	Ø68x39	100 LM/W	3CCT (3000K-4000K-5700K)
Beam 3112	10W	Ø110x38	Ø88x38	110 LM/W	3CCT (3000K-4000K-5700K)
Beam 3113	13W	Ø120x39	Ø100x45	115 LM/W	3CCT (3000K-4000K-5700K)
Beam 3114	15W	Ø145x45	Ø118x45	120 LM/W	3CCT (3000K-4000K-5700K)
Beam 3130	18W	Ø170x45	Ø136x45	120 LM/W	3CCT (3000K-4000K-5700K)
Beam 3131	24W	Ø190x45	Ø155x45	125 LM/W	3CCT (3000K-4000K-5700K)
Beam 3132	35W	Ø228x45	Ø200x45	130 LM/W	3CCT (3000K-4000K-5700K)



BEAM 0409W/0409B/0721W/0721B BEAM 0723W/0723B

DECORATIVE LIGHTING
LED DOWN LIGHT

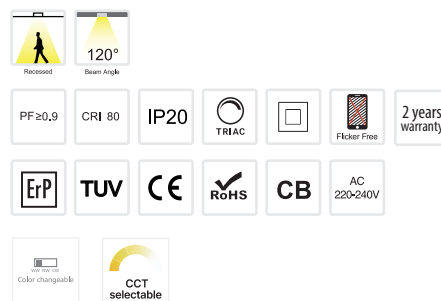

CCT dip switch changeable

3000K 4000K 6500K

Designation	Built-in round ceiling fixture	Dimmable	Triac dimming
Color of Device	White or black	Voltage	220-240V 50-60Hz
Material	Polycarbonate	CCT	3000/4000/6500K(DIP-switch)
Class	LED	Beam angle	120°
Adjustable	No	IP	20




TECHNICAL DATA

Code	Color	Dimensions	Cut-out Size	Power	Lumen 3000/4000/6500K
Beam 0409W	White	Ø 115 x 32mm	Ø 105mm	6W	320 / 360 / 330Lm
Beam 0409B	Black	Ø 115 x 32mm	Ø 105mm	6W	320 / 360 / 330Lm
Beam 0721W	White	Ø 170 x 32mm	Ø 155mm	12W	770 / 820 / 780Lm
Beam 0721B	Black	Ø 170 x 32mm	Ø 155mm	12W	770 / 820 / 780Lm
Beam 0723W	White	Ø 240 x 32mm	Ø 225mm	24W	1650 / 1740 / 1680Lm
Beam 0723B	Black	Ø 240 x 32mm	Ø 225mm	24W	1650 / 1740 / 1680Lm



BEAM 0022W/0022B BEAM 0023W/0023B

DECORATIVE LIGHTING
LED DOWN LIGHT

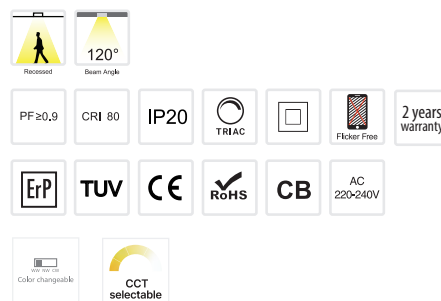

CCT dip switch changeable

3000K	4000K	6500K
-------	-------	-------

Designation	Built-in square ceiling fixture	Dimmable	Triac dimming
Color of Device	White or black	Voltage	220-240V 50-60Hz
Material	Polycarbonate	CCT	3000/4000/6500K(DIP-switch)
Class	LED	Beam angle	120°
Adjustable	No	IP	20



TECHNICAL DATA

Code	Color	Dimensions	Cut-out Size	Power	Lumen 3000/4000/6500K
BEAM 0022W	White	170x170x32mm	155x155mm	12W	950 / 1100 / 1000Lm
BEAM 0022B	Black	170x170x32mm	155x155mm	12W	950 / 1100 / 1000Lm
BEAM 0023W	White	220x220x32mm	205x205mm	24W	1950 / 2150 / 2050Lm
BEAM 0023B	Black	220x220x32mm	205x205mm	24W	1950 / 2150 / 2050Lm



BEAM 0608/0611

INDUSTRIAL LIGHTING
LED DOWN LIGHT

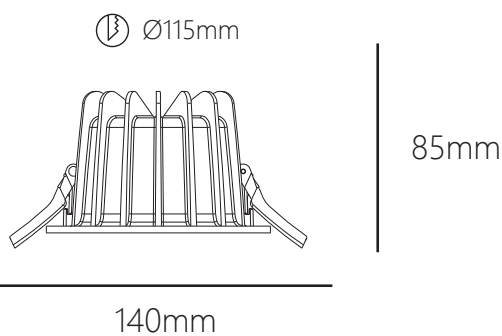

PRODUCT FEATURES

Includes COB LED light source
Excluding 500mA driver:
Driver to be ordered separately.
Also choose between DALI or non-dimmable.

Code	CCT	Lumen	Power	Driver
Beam 0608	4000K	2600Lm	20W	500mA
Beam 0611	3000K	2600Lm	20W	500mA


TECHNICAL DATA

Code	Beam 0608/Beam 0611
Color of Device	White
Diameter x Height	Ø140x85mm
Cut-out Size	Ø115mm
Class	LED
Adjustable	No
Dimmable	Not dimmable or DALI
Power	20W
Voltage	220-240V 50-60Hz
CCT	3000 of 4000K
CRI	> 80
Lumen	2600Lm
Beam Angle	80°
IP	20
UGR	< 19
Flux Code	93 99 100 99 100




BEAM 0609/0612

INDUSTRIAL LIGHTING
LED DOWN LIGHT



115mm



PRODUCT FEATURES

Including COB LED light source
Exclusief driver
Order the driver separately according to the wattage.
As well as your choice from DALI or non-dimmable.

Code	CCT	Lumen	Power	Driver
Beam 0609	4000K	2600Lm	20W	500mA
Beam 0609	4000K	3640Lm	28W	700mA
Beam 0609	4000K	4680Lm	36W	900mA
Beam 0609	4000K	5460Lm	42W	1050mA
Beam 0612	3000K	2600Lm	20W	500mA
Beam 0612	3000K	3640Lm	28W	700mA
Beam 0612	3000K	4680Lm	36W	900mA
Beam 0612	3000K	5460Lm	42W	1050mA


TECHNICAL DATA

Code	Beam 0609/Beam 0612
Color of Device	White
Diameter x Height	Ø 195x115mm
Cut-out Size	Ø 165mm
Class	LED
Adjustable	No
Dimmable	Not dimmable or DALI
Power	20W/ 28W/ 36W / 42W
Voltage	220-240V 50-60Hz
CCT	3000 of 4000K
CRI	>80
Lumen	130Lm/W
Beam Angle	80°
IP	20
UGR	<19
Flux Code	93 99 100 99 100




BEAM 0610/0613

INDUSTRIAL LIGHTING
LED DOWN LIGHT



125mm



PRODUCT FEATURES

Including COB LED light source
Exclusief driver
Order the driver separately according to the wattage.
As well as your choice from DALI or non-dimmable.

Code	CCT	Lumen	Power	Driver
Beam 0610	4000K	2600Lm	20W	500mA
Beam 0610	4000K	3640Lm	28W	700mA
Beam 0610	4000K	4680Lm	36W	900mA
Beam 0610	4000K	5460Lm	42W	1050mA
Beam 0610	4000K	6890Lm	52W	1300mA
Beam 0613	3000K	2600Lm	20W	500mA
Beam 0613	3000K	3640Lm	28W	700mA
Beam 0613	3000K	4680Lm	36W	900mA
Beam 0613	3000K	5460Lm	42W	1050mA
Beam 0613	3000K	6890Lm	52W	1300mA



TECHNICAL DATA

Code	Beam 0610
Color of Device	White
Diameter x Height	Ø 230x125mm
Cut-out Size	Ø 195mm
Class	LED
Adjustable	No
Dimmable	Not dimmable or DALI
Power	20W/ 28W/ 36W / 42W /52W
Voltage	220-240V 50-60Hz
CCT	3000 of 4000K
CRI	>80
Lumen	130Lm/W
Beam Angle	80°
IP	20
UGR	<19
Flux Code	93 99 100 99 100



BEAM 0698

INDUSTRIAL LIGHTING
LED DOWN LIGHT

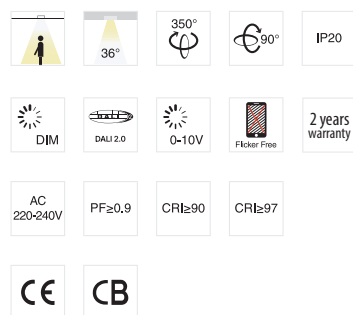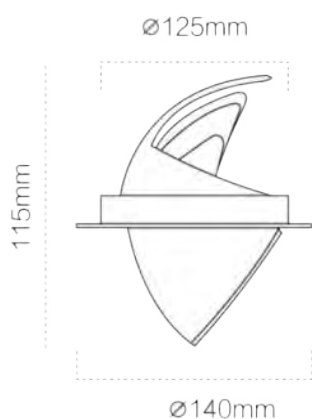

PRODUCT FEATURES

Module: Bridelux

Including LED driver:

Options: DALI (digital addressable lighting interface)

Color consistency: 3 SDCM

Lifetime: L70/B50 at 50,000 hours

Code	CCT
Beam 0698/3000K	3000K
Beam 0698/4000K	4000K

TECHNICAL DATA

Code	Beam 0698
Device Color	White
Diameter x Height	Ø 140x125mm
Cut-out Size	Ø 125mm
Class	LED
Adjustable	Yes
Dimmable	Not dimmable or DALI
Power	Max 35W (20-35W with multi-power driver)
Voltage	220-240V 50-60Hz
CCT	3000K of 4000K
Lumen	135Lm/W
CRI	>90
Beam Angle	36°
IP	20



BEAM 0699

INDUSTRIAL LIGHTING
LED DOWN LIGHT



PRODUCT FEATURES

Module: Bridelux
Excluding LIFUD driver:
Driver to be ordered separately; also choose between DALI (digital addressable lighting interface) or non-dimmable. (See LED drivers on page 42)
Color consistency: 3 SDCM
Lifetime: L70/B50 at 50,000 hours

Code	CCT
Beam 0699/3000K	3000K
Beam 0699/4000K	4000K

TECHNICAL DATA


Code	Beam 0699
Device Color	White
Diameter x Height	Ø190X158mm
Cut-out Size	Ø175mm
Class	LED
Adjustable	Yes
Dimmable	Not dimmable or DALI
Power	Max 60W (20-60W available)
Voltage	220-240V 50-60Hz
CCT	3000K or 4000K
Lumen	130lm/W
CRI	>90
Beam Angle	36°
IP	20



DECORATIVE LIGHTING
LED DOWN LIGHT


BEAM 0729W

Ø145mm



54mm

165mm



PRODUCT FEATURES

Module: Bridelux
Including LED driver:
Option: DALI (digital addressable lighting interface)
Color consistency: 3 SDCM
Lifetime: L70/B50 at 50,000 hours

TECHNICAL DATA


Code	Beam 0729W
Device Color	White
Diameter x Height	Ø165x54mm
Cut-out Size	Ø145mm
Class	LED
Adjustable	No
Dimmable	Not dimmable or DALI
Power	25W
Voltage	220-240V 50-60Hz
CCT	3000K
Lumen	2600Lm
CRI	>80
Beam Angle	120°
IP	65



BEAM 1298


DECORATIVE LIGHTING
LED DOWN LIGHT

Ø90mm



59mm

109mm




PRODUCT FEATURES

Module: Bridelux
including LED driver:
Options: DALI (digital addressable lighting interface)
Color consistency: 3 SDCM
Lifetime: L70/B50 at 50,000 hours

TECHNICAL DATA

Code	Beam 1298
Device Color	Black
Diameter x Height	Ø109x59mm
Cut-out Size	Ø90mm
Class	LED
Adjustable	No
Dimmable	Not dimmable or DALI
Power	15W
Voltage	220-240V 50-60Hz
CCT	3000K
Lumen	1000Lm
CRI	>90
Beam Angle	110°
IP	65

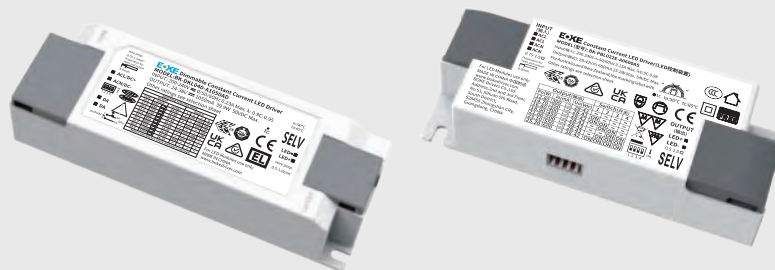


BEAM 0615 up to 0626

DECORATIVE LIGHTING
LED DRIVERS

PRODUCT FEATURES

Code	Beam 0615 up to 0626
Manufacturer	LIFUD/BOKE
Voltage	220-240V 50/60Hz
IP	20>
PF	0,9



TECHNICAL DATA

Code	Power	Current	Output Voltage	Dimensions lxbxh	Dimbaar
Beam 0623	18W	450mA	25-42Vdc	115x42x28mm	No
Beam 0615	28W	700mA	25-42Vdc	115x42x28mm	No
Beam 0616	36W	900mA	25-42Vdc	115x42x28mm	No
Beam 0617	42W	1050mA	25-42Vdc	115x42x28mm	No
Beam 0618	52W	1300mA	25-42Vdc	140x43x30mm	No
Beam 0626	12-24W	300mA-600mA	28-42Vdc	123x46x30mm	No
Beam 0624	20-40W	500mA-1000mA	28-42Vdc	123x46x30mm	No
Beam 0625	12-40W	300mA-1050mA	9-42Vdc	123x46x30mm	TRIAC
Beam 0619	22-40W	550mA-1050mA	25-42Vdc	107x70x30mm	DALI
Beam 0620	40,5-60W	750mA-1500mA	25-42Vdc	160x49x28mm	DALI





MIRO 20 aluminum reflector
140 LM/W
8-15W multi-power driver (8W 10W 12W 14W)



BEAM 0115W/0115B

DECORATIVE LIGHTING
RECESSED LIGHT

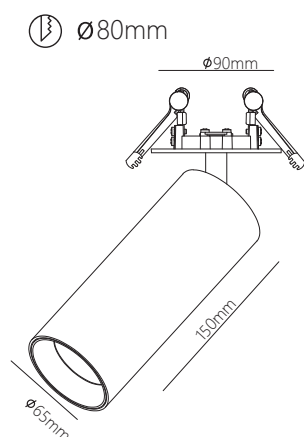

PRODUCT FEATURES

Driver included
Aluminium housing
Powder coating finish
Springs

VERSIONS

Beam 0115B Black
Beam 0115W White

OPTION

Beam 0114.1G Inner ring gold
Beam 0114.1B Inner ring black
Beam 0114.1W Inner ring white


TECHNICAL DATA

Code	Beam 0115W/0115B
Device Color	White or black
L×W×H	Ø65x150mm
Cut-out Size	Ø80mm
Class	LED
Adjustable	Yes
Dimmable	Triac dimming
Power	8-14W
Lumen	140Lm/W
Voltage	220-240 50-60Hz
CCT	3000K
CRI	>90
Beam angle	36°
IP	20



BEAM 0026W/0026B

DECORATIVE LIGHTING
RECESSED LIGHT

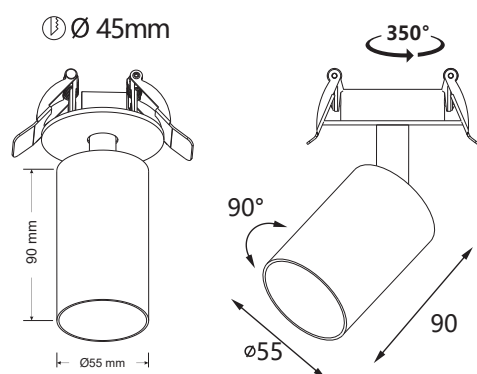

PRODUCT FEATURES

Aluminium housing
Powder coating finish
Springs

VERSIONS

Beam 0026W White
Beam 0026B Black

TECHNICAL DATA



Code	Beam 0026W/0026B
Device Color	White or black
LxWxH	Ø 55x90mm
Cut-out Size	Ø 45mm
Adjustable	Yes
Power	Max.10W
Voltage	220-240V 50-60Hz
Fitting	GU10
IP	20



BEAM 0715W

DECORATIVE LIGHTING
RECESSED LIGHT

Ø 70mm

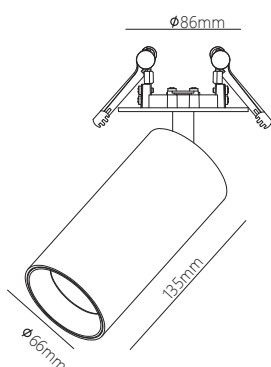

PRODUCT FEATURES

Driver included
Aluminium housing
Powder coating finish
Springs

VERSIONS

Beam 0715W White

OPTION

Beam 0714.1G Inner ring gold
Beam 0714.1B Inner ring black
Beam 0714.1W Inner ring white

TECHNICAL DATA

Code	Beam 0715
Device Color	White
L×W×H	Ø 66x135mm
Cut-out Size	Ø 70mm
Class	LED
Adjustable	Yes
Dimmable	Triac DIM
Power	10W
Lumen	956Lm
Voltage	220-240 50-60Hz
CCT	3000K
CRI	>90
Beam angle	36°
IP	20





MIRO 20 aluminum reflector
140 LM/W



DECORATIVE LIGHTING
RECESSED LIGHT

BEAM 0041W/0041B

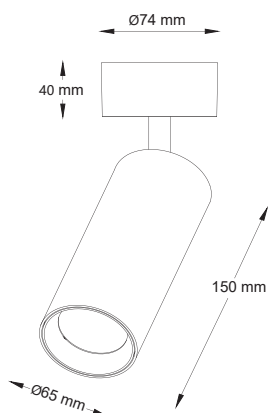

PRODUCT FEATURES

Driver included
Aluminium housing
Powder coating finish

VERSIONS

Beam 0041B Black
Beam 0041W White

OPTION

Beam 0114.1G Inner ring gold
Beam 0114.1B Inner ring black
Beam 0114.1W Inner ring white


TECHNICAL DATA

Code	Beam 0041W/0041B
Device Color	White or black
L×W×H	Ø65×150mm
Class	LED
Adjustable	Yes
Dimmable	Triac DIM
Power	10W
Lumen	1400Lm
Voltage	220-240 50-60Hz
CCT	3000K
CRI	>90
Beam angle	36°
IP	20



BEAM 0027W/0027B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

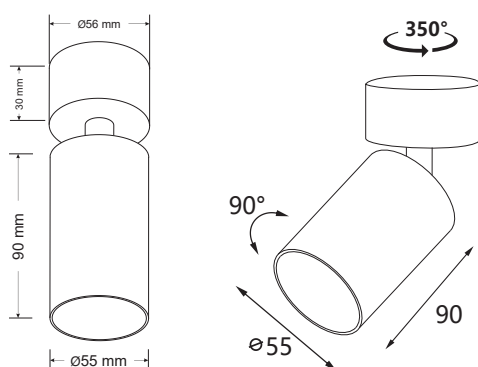

PRODUCT FEATURES

Aluminium housing
Powder coating finish
Springs
GU10 not included

VERSIONS

Beam 0027W White
Beam 0027B Black


TECHNICAL DATA

Code	Beam 0027W/0027B
Device Color	White or black
L×W×H	Ø 55x90mm
Adjustable	Yes
Power	Max.10W
Voltage	220-240V 50-60Hz
Fitting	GU10
IP	20



BEAM 0734W/0734B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

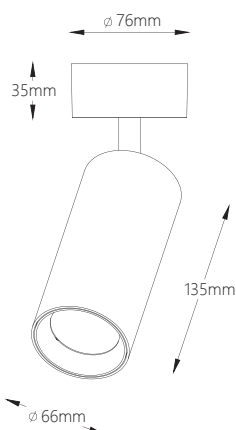

PRODUCT FEATURES

Driver included
Aluminium housing
Powder coating finish

VERSIONS

Beam 0734B Black
Beam 0734W White

OPTION

Beam 0714.1G Inner ring gold
Beam 0714.1B Inner ring black
Beam 0714.1W Inner ring white



TECHNICAL DATA

Code	Beam 0734W/0734B
Device Color	White or black
L×W×H	Ø 66x135mm
Class	LED
Adjustable	Yes
Dimmable	Triac DIM
Power	10W
Lumen	956Lm
Voltage	220-240 50-60Hz
CCT	3000K
CRI	>90
Beam angle	36°
IP	20



BEAM 0544W/0544B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

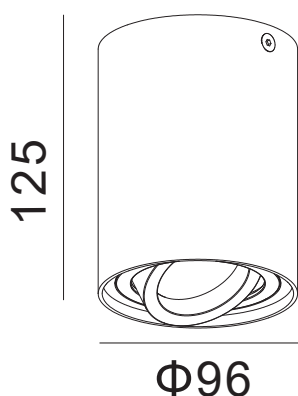

PRODUCT FEATURES


Aluminium round ceiling fitting
Application area: interior lighting
Excluding GU10 LED

VERSIONS

Beam 0544W White
Beam 0544B Black



TECHNICAL DATA

Code	Beam 0544W/0544B
DiameterxHeight	Ø96x125mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max.10W
Voltage	220-240V 50-60Hz
Fitting	GU10
IP	20

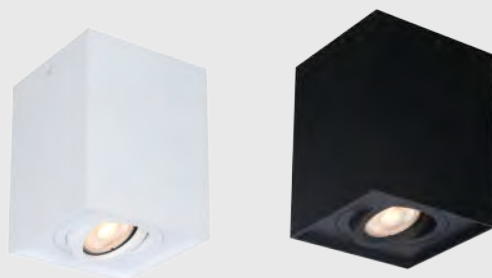

BEAM 0545W/0545B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

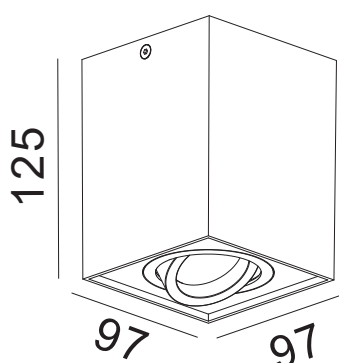

PRODUCT FEATURES

Aluminium square ceiling fitting
Application area: interior lighting
Excluding GU10 LED

VERSIONS

Beam 0545W White
Beam 0545B Black



TECHNICAL DATA

Code	Beam 0545W/0545B
L×W×H	97x97x125mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max.10W
Voltage	220-240V 50-60Hz
Fitting	GU10
IP	20



BEAM 0751W/0751B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

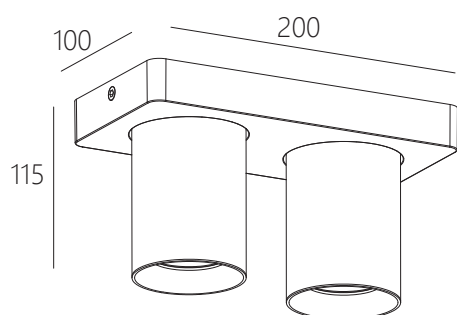

PRODUCT FEATURES

Aluminium rectangular ceiling fitting
Application area: interior lighting
Excluding GU10 LED

VERSIONS

Beam 0751W White
Beam 0751B Black



TECHNICAL DATA

Code	Beam 0751W/0751B
LxWxH	200x100x115mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max. 2x10W
Voltage	220-240V 50-60Hz
Fitting	2xGU10
IP	20



BEAM 0752W/0752B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

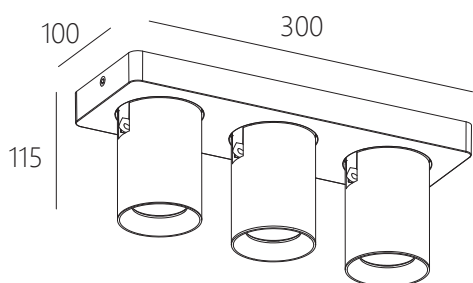

PRODUCT FEATURES


Aluminium rectangular ceiling fitting
Application area: interior lighting
Excluding GU10 LED

VERSIONS

Beam 0752W White
Beam 0752B Black


TECHNICAL DATA

Code	Beam 0752W/0752B
L×W×H	300x100x115mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max. 3x10W
Voltage	220-240V 50-60Hz
Fitting	3xGU10
IP	20

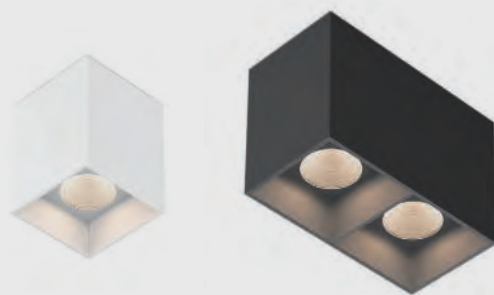

BEAM 0746W/0746B BEAM 0747W/0747B


DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

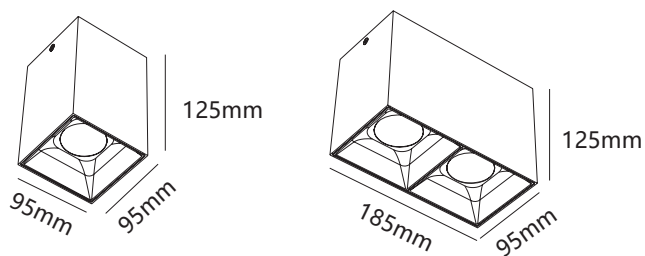

CCT dip switch changeable



2700K 3000K 4000K

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0746W	White	8W	1000Lm	>90	TRIAC	3CCT (2700K-3000K-4000K)	95x95x125mm
Beam 0746B	Black	8W	1000Lm	>90	TRIAC	3CCT (2700K-3000K-4000K)	95x95x125mm
Beam 0747W	White	2x7W	1600Lm	>90	TRIAC	3CCT (2700K-3000K-4000K)	185x95x125mm
Beam 0747B	Black	2x7W	1600Lm	>90	TRIAC	3CCT (2700K-3000K-4000K)	185x95x125mm

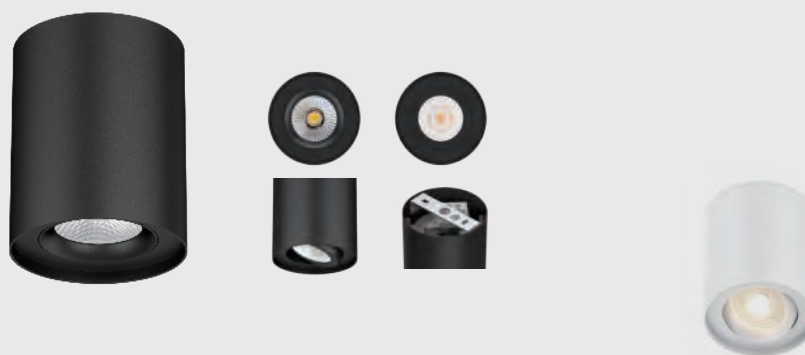

BEAM 0040W/0040B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

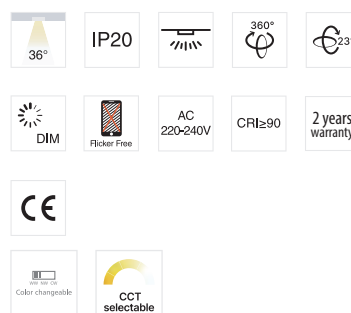

CCT dip switch changeable

2700K 3000K 4000K

PRODUCT FEATURES

Aluminium round ceiling fitting
Including:
LED module
LED driver

VERSIONS

Beam 0040W White
Beam 0040B Black



TECHNICAL DATA

Code	Beam 0040W/0040B
Diameter x Height	Ø 90x108mm
Class	LED
Adjustable	Yes
Dimmable	Triac dimming
Power	10W
Voltage	220-240V 50-60Hz
CCT	3CCT(2700K-3000K-4000K
CRI	>90
Lumen	1090Lm
Beam Angle	36°
IP	20
Flux Code	98 100 100 100 70



BEAM 0551WW/0551WB BEAM 0551BB/0551BW

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

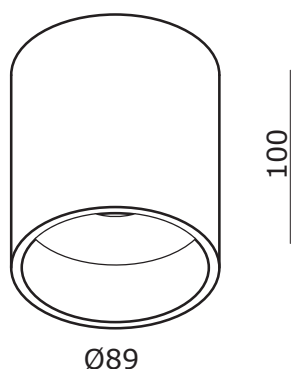

PRODUCT FEATURES

Aluminium round ceiling fitting
Including:
LED module
LED driver

VERSIONS

	Exterior	Interior
Beam 0551WW	White	White
Beam 0551WB	White	Black
Beam 0551BB	Black	Black
Beam 0551BW	Black	White


TECHNICAL DATA

Code	Beam 0551WW / WB / BB / BW
Diameter x Height	Ø89 x100mm
Class	LED
Adjustable	Yes
Dimmable	Triac dimming
Power	9W
Voltage	220-240V 50-60Hz
CCT	3000K
CRI	> 80
Lumen	710Lm
Beam Angle	36°
IP	20
Flux Code	98 100 100 100 70



BEAM 0042W/0042B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT



IP20

2 years
warranty

AC
220-240V

GU10

RoHS

CE



PRODUCT FEATURES

Aluminium round ceiling fitting
Application area: interior lighting
Excluding GU10 LED

VERSIONS

Beam 0042W White
Beam 0042B Black


TECHNICAL DATA

Code	Beam 0042W/0042B
L×W×H	Ø 54x90mm
Class	LED
Adjustable	No
Dimmable	Depends on type GU10
Power	Max. 1x10W
Voltage	220-240V 50-60Hz
Fitting	1xGU10
IP	20



BEAM 0043W/0043B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

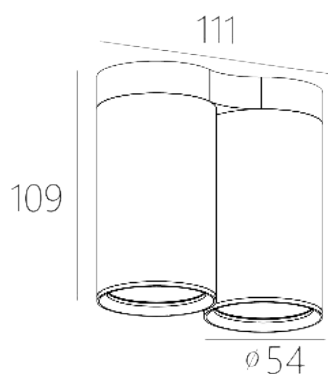

IP20

2 years
warranty



GU10



PRODUCT FEATURES

Aluminium double round ceiling fitting

Application area: interior lighting

Excluding GU10 LED

VERSIONS

Beam 0043W White

Beam 0043B Black


TECHNICAL DATA

Code	Beam 0043W/0043B
L x H x Diam.	111x109xØ54mm
Class	LED
Adjustable	No
Dimmable	Depends on type GU10
Power	Max. 2x10W
Voltage	220-240V 50-60Hz
Fitting	2xGU10
IP	20



BEAM 0044W/0044B

DECORATIVE LIGHTING
SURFACE MOUNTED LIGHT

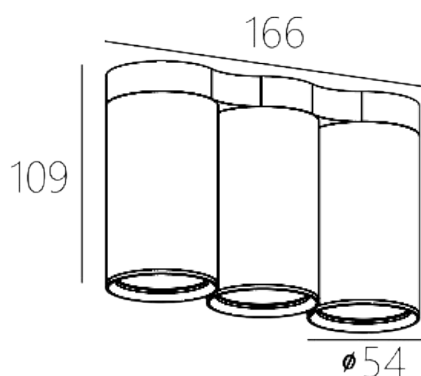

IP20

2 years
warranty

AC
220-240V

GU10

RoHS



PRODUCT FEATURES

Aluminium triple round ceiling fitting
Application area: interior lighting
Excluding GU10 LED

VERSIONS

Beam 0044W White
Beam 0044B Black



TECHNICAL DATA

Code	Beam 0044W/0044B
L x H x Diam.	166x109xØ54mm
Class	LED
Adjustable	No
Dimmable	Depends on type GU10
Power	Max. 3x10W
Voltage	220-240V 50-60Hz
Fitting	3xGU10
IP	20



BEAM 0717B

DECORATIVE LIGHTING
LED PENDANT LIGHT

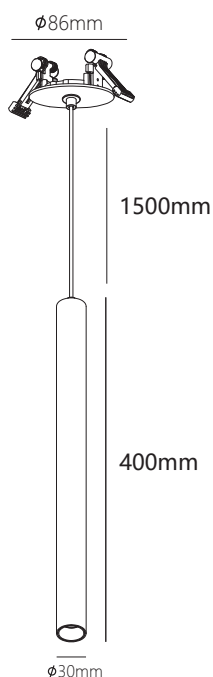

TECHNICAL DATA

Code	Beam 0717B
Device Color	Black
Dimensions	Ø30x400mm
Cut-out Size	Ø 70mm
Power	6W
Lumen	400Lm
Beam Angle	30°
Dimmable	Triac dimming
Class	LED
Adjustable	No
Voltage	220-240V 50-60Hz
CCT	3000K
CRI	> 90
IP	20



PRODUCT FEATURES

Recessed ceiling pendant lamp, cylindrical shape
Lifetime 30,000h (L70/B30)
Including:
OSRAM CREE LED
Driver
Cable length +/- 1450mm



BEAM 0719B

DECORATIVE LIGHTING
LED PENDANT LIGHT

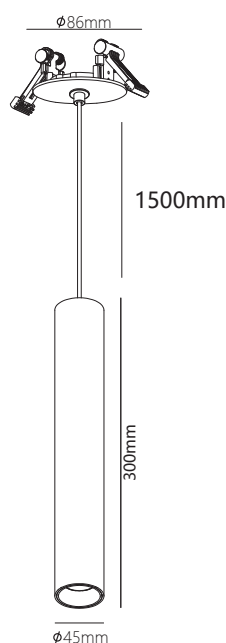

TECHNICAL DATA

Code	Beam 0719B
Device Color	Black
Dimensions	Ø45x300mm
Cut-out Size	Ø70mm
Power	10W
Lumen	800Lm
Beam Angle	36°
Dimmable	Triac dimming
Class	LED
Adjustable	No
Voltage	220-240V 50-60Hz
CCT	3000K
CRI	>90
IP	20



PRODUCT FEATURES

Recessed ceiling pendant lamp, cylindrical shape
Lifetime 30,000h (L70/B30)
Including:
OSRAM CREE LED
Driver
Cable length +/- 1450mm



BEAM 0710WW/0710WB/0710WG BEAM 0710BB/0710BW/0710BG

DECORATIVE LIGHTING
LED PENDANT LIGHT



PRODUCT FEATURES

Color consistency: 3SDCM
Life time: 70,000h (L90/B10)
Including:
Citizen LEDs
Driver (triac dim)

VERSIONS

Beam 0710WW	White with white ring
Beam 0710WB	White with black ring
Beam 0710WG	White with golden ring
Beam 0710BB	Black with black ring
Beam 0710BW	Black with white ring
Beam 0710BG	Black with golden ring



TECHNICAL DATA

Code	Beam 0710WW/ WB/WG/BB/BW/BG
Device colour	White or Black
Diameter x Height	Ø 26 x 400mm
Suspension length	2000mm
Class	LED
Adjustable	No
Dimmable	Triac Dimming
Power	7W
Voltage	220-240V 50-60Hz
CCT	2700K
CRI	> 90
Output Lumen	300 Lm
Beam angle	40°
IP	20
UGR	< 19



BEAM 0718B

DECORATIVE LIGHTING
LED PENDANT LIGHT

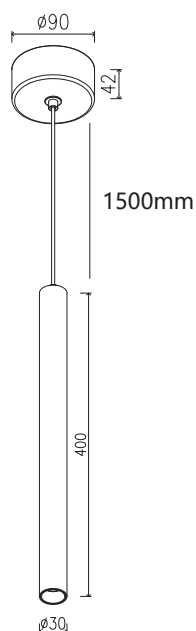

PRODUCT FEATURES

Ceiling - mounted pendant lamp, tube - shaped
Life time: 30,000h (L70/B30)
Including:
OSRAM CREE LED
Driver
Cable length +/- 1500mm



TECHNICAL DATA

Code	Beam 0718B
Device colour	Black
Dimension	Ø 30x400mm
Power	6W
Output Lumen	400Lm
Beam angle	30°
Dimmable	Triac dimmable
Class	LED
Adjustable	No
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
CRI	>90
IP	20



BEAM 0720B

DECORATIVE LIGHTING
LED PENDANT LIGHT

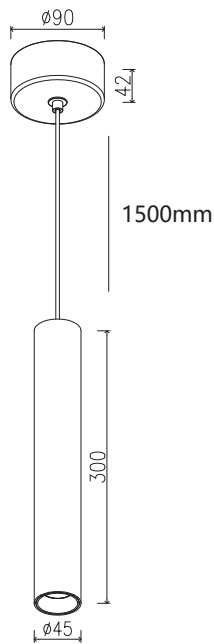

PRODUCT FEATURES

Ceiling-mounted pendant lamp, tube-shaped
Life time: 30,000h (L70/B30)
Including:
OSRAM CREE LED
Driver
Cable length +/- 1500mm



TECHNICAL DATA

Code	Beam 0720B
Device colour	Black
Dimension	Ø 45x300mm
Power	10W
Output Lumen	800Lm
Beam angle	36°
Dimmable	Triac dimmable
Class	LED
Adjustable	No
Voltage	220-240V 50-60Hz
CCT	3000K
CRI	>90
IP	20



BEAM 0722W/0722B BEAM 0724W/0724B

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR

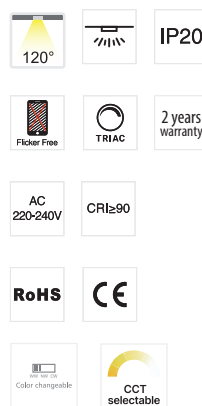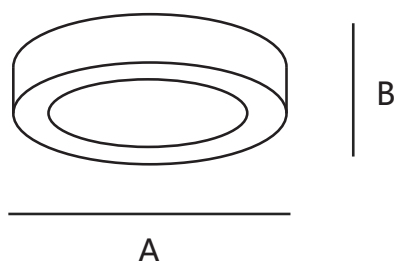

CCT dip switch changeable

3000K 4000K 6500K

TECHNICAL DATA



Designation	Ceiling mounting fixture, round	Voltage	220-240V 50-60Hz
Device Color	White or black	CCT	3000/4000/6500K (DIP-switch)
Material	Polycarbonate	Beam Angle	120°
Class	LED	IP	20
Adjustable	No	CRI	>80
Dimmable	Triac dimming		

Code	Color	Power	CCT	Lumen (3000K/4000K/6500K)	Size
Beam 0722W	White	12W	3CCT (3000K-4000K-6500K)	770Lm / 820Lm / 780Lm	Ø177x35mm
Beam 0722B	Black	12W	3CCT (3000K-4000K-6500K)	770Lm / 820Lm / 780Lm	Ø177x35mm
Beam 0724W	White	24W	3CCT (3000K-4000K-6500K)	1650Lm / 1740Lm / 1680Lm	Ø247x35mm
Beam 0724B	Black	24W	3CCT (3000K-4000K-6500K)	1650Lm / 1740Lm / 1680Lm	Ø247x35mm



BEAM 0725W/0725B BEAM 0726W/0726B

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR

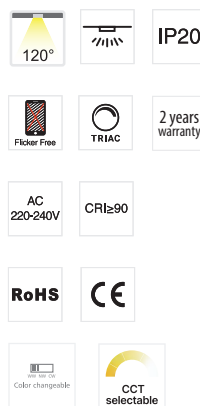

CCT dip switch changeable

3000K	4000K	6500K
-------	-------	-------

TECHNICAL DATA



Designation	Ceiling mounting fixture, round	Voltage	220-240V 50-60Hz
Device Color	White or black	CCT	3000/4000/6500K (DIP-switch)
Material	Polycarbonate	Beam Angle	120°
Class	LED	IP	20
Adjustable	No	CRI	>80
Dimmable	Triac dimming		

Code	Color	Power	CCT	Lumen (3000K/4000K/6500K)	Size
Beam 0725W	White	12W	3CCT (3000K-4000K-6500K)	770Lm / 820Lm / 780Lm	172x172x35mm
Beam 0725B	Black	12W	3CCT (3000K-4000K-6500K)	770Lm / 820Lm / 780Lm	172x172x35mm
Beam 0726W	White	24W	3CCT (3000K-4000K-6500K)	1650Lm / 1740Lm / 1680Lm	227x227x35mm
Beam 0726B	Black	24W	3CCT (3000K-4000K-6500K)	1650Lm / 1740Lm / 1680Lm	227x227x35mm



BEAM 0744W/0744B BEAM 0745W/0745B

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR

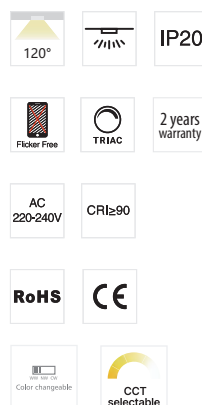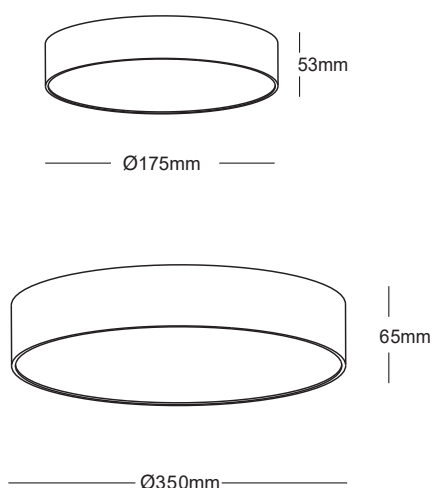

CCT dip switch changeable

3000K 4000K 5000K

TECHNICAL DATA



Designation	Ceiling mounting fixture, round	Dimmable	Triac Dimming
Device Color	White or black	Voltage	220-240V 50-60Hz
Material	Polycarbonate	CCT	3000/4000/5000K(DIP-switch)
Class	LED	Beam Angle	120°
Adjustable	No	IP	20

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0744W	White	15W	1500Lm	>80	TRIAC	3CCT (3000K-4000K-5000K)	Ø175x53mm
Beam 0744B	Black	15W	1500Lm	>80	TRIAC	3CCT (3000K-4000K-5000K)	Ø175x53mm
Beam 0745W	White	30W	3500Lm	>80	TRIAC	3CCT (3000K-4000K-5000K)	Ø350x65mm
Beam 0745B	Black	30W	3500Lm	>80	TRIAC	3CCT (3000K-4000K-5000K)	Ø350x65mm



BEAM 0735W/0736W/0737W BEAM 0735B/0736B/0737B

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR

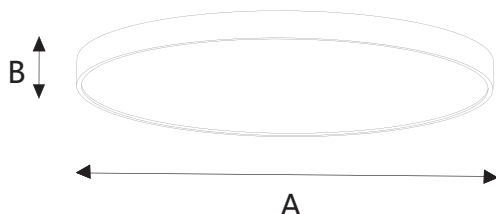


OPTION:

Suspension kit Beam 0735:

- Beam 0739W
- Beam 0739B

Suspension kit Beam 0736 / 0737:

- Beam 0738W
- Beam 0738B



TECHNICAL DATA



Designation	Ceiling mounting fixture, round	Dimmable	DALI dimmable
Device Color	White or black	Voltage	220-240V 50-60Hz
Material	Polycarbonate	CCT	3000K/4000K/5000K or 3000K
Class	LED	Beam Angle	120°
Adjustable	No	IP	20

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0735W	White	60W	100Lm/W	>80	DALI-dimmable	3000K/4000K/5000K	Ø600x65mm
Beam 0735B	Black	60W	100Lm/W	>80	DALI-dimmable	3000K/4000K/5000K	Ø600x65mm
Beam 0736W	White	80W	100Lm/W	>80	DALI-dimmable	3000K	Ø800x65mm
Beam 0736B	Black	80W	100Lm/W	>80	DALI-dimmable	3000K	Ø800x65mm
Beam 0737W	White	100W	100Lm/W	>80	DALI-dimmable	3000K	Ø1000x65mm
Beam 0737B	Black	100W	100Lm/W	>80	DALI-dimmable	3000K	Ø1000x65mm




BEAM 0045W/0046W/0047W BEAM 0045B/0046B/0047B

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR

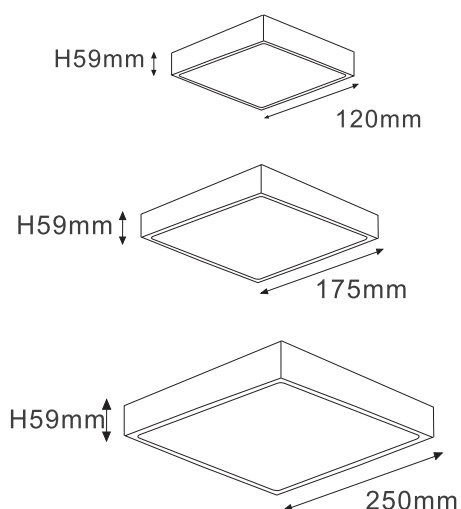

CCT dip switch changeable



TECHNICAL DATA



Designation	Ceiling mounting fixture, round	Dimmable	Triac Dimming
Device Color	White or black	Voltage	220-240V 50-60Hz
Material	Polycarbonate	CCT	3000/4000/5000K(DIP-switch)
Class	LED	Beam Angle	120°
Adjustable	No	IP	20

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0045W	White	15W	1200Lm	>90	TRIAC	3CCT (3000K-4000K-5000K)	120x120x59mm
Beam 0046W	White	20W	2000Lm	>90	TRIAC	3CCT (3000K-4000K-5000K)	175x175x59mm
Beam 0047W	White	30W	3000Lm	>90	TRIAC	3CCT (3000K-4000K-5000K)	250x250x59mm
Beam 0045B	Black	15W	1200Lm	>90	TRIAC	3CCT (3000K-4000K-5000K)	120x120x59mm
Beam 0046B	Black	20W	2000Lm	>90	TRIAC	3CCT (3000K-4000K-5000K)	175x175x59mm
Beam 0047B	Black	30W	3000Lm	>90	TRIAC	3CCT (3000K-4000K-5000K)	250x250x59mm



BEAM 0730

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR

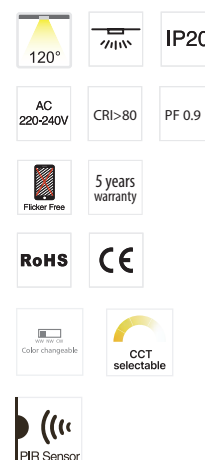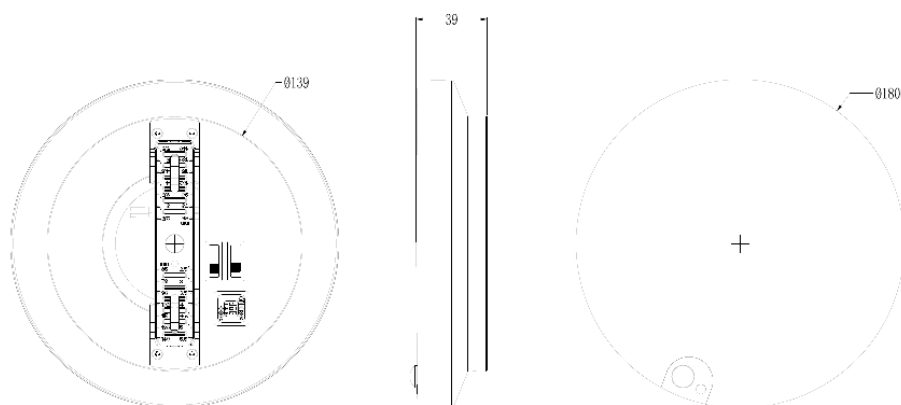

Includes motion sensor and dusk-to-dawn sensor

TECHNICAL DATA

Designation	Ceiling mounting fixture, round	Voltage	220-240V 50-60Hz
Device Color	White	CCT	2700/3000/3500/4000/5000K (DIP-switch)
Material	Polycarbonate	Beam Angle	120°
Class	LED	IP	20
Adjustable	No	CRI	>80
Dimmable	No		

Code	Color	Power	CCT	Lumen	Size
Beam 0730	White	3-5-7-9W	5CCT	85-95 Lm/W (765-855Lm)	Ø180x39mm


BEAM 0730

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR



Ø180x39mm /9W

With PIR sensor and photocell sensor

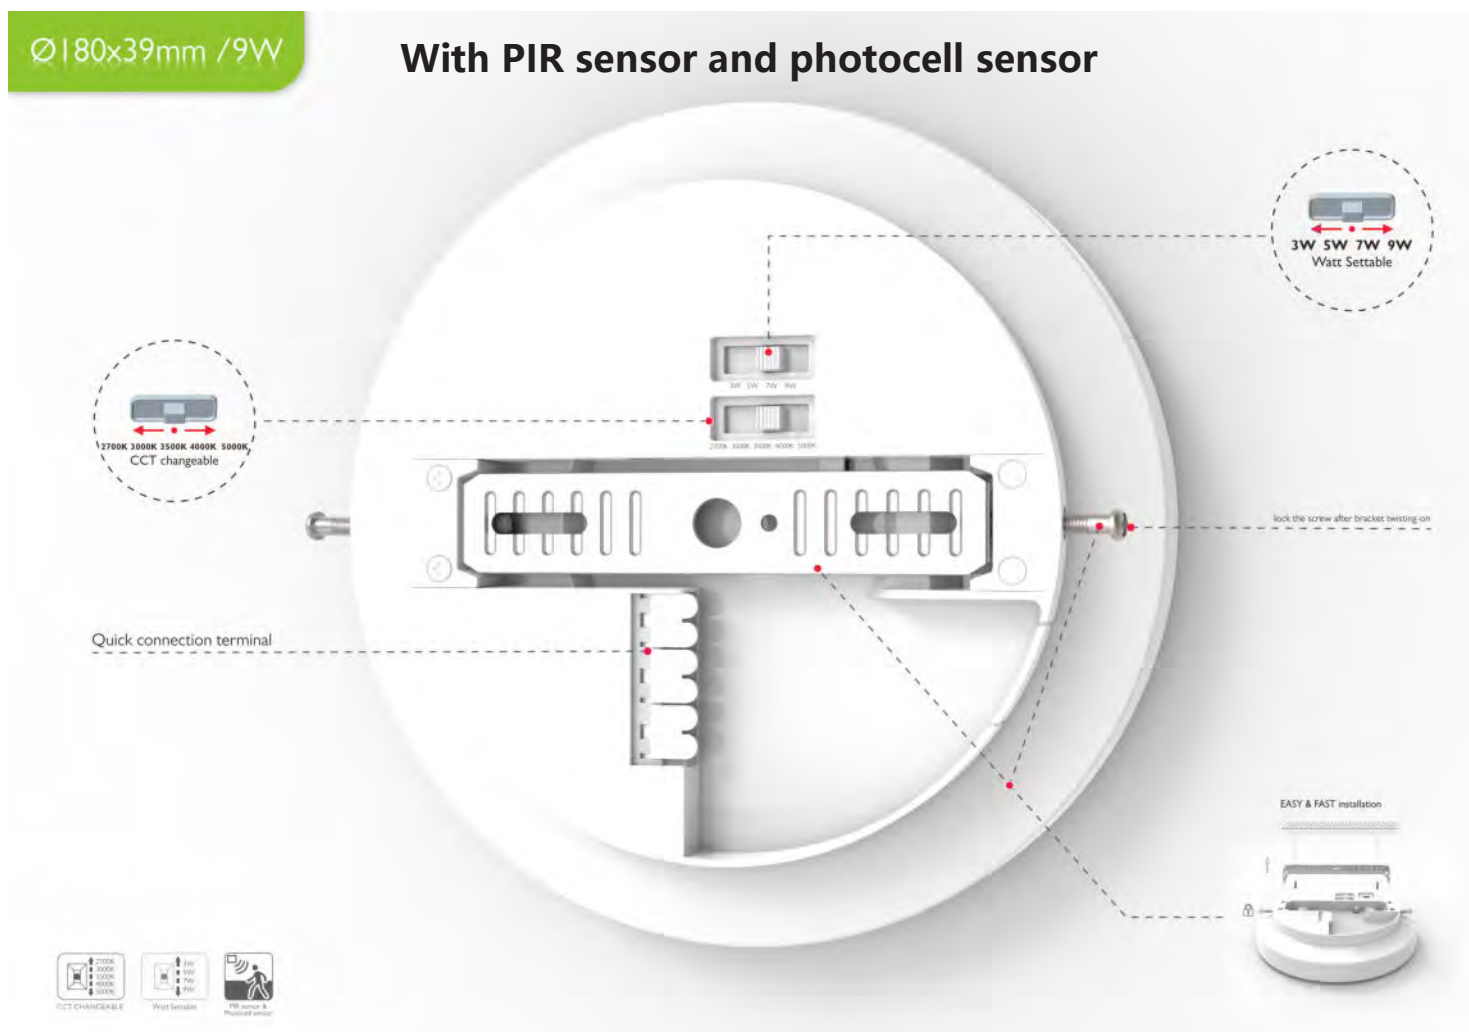

BEAM CIRCLE

DECORATIVE LIGHTING
LED CEILING LIGHT INDOOR



Collectively, the three sizes result in a visually striking architectural pendant, offering a fresh perspective on decorative lighting

Light & Size

Direct lighting.
Family size as
600mm, 800mm,
1000mm, 1200mm will
satisfy every unique
and combined space.


Combination

By merging multiple sizes,
visually impactful clusters
can be created, infusing the
architectural space with
dynamic and engaging
lighting arrangements.

Versatile Mounting Plate

The mounting plate
comes with three
sets of combined
installation kits,
facilitating a
spectrum of unique
configurations.






TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	SMD (SDCM<6)
Color Temperature	3000K/4000K
Luminous Efficiency@4000K	90lm/W(PD35A) 120lm/W(PD35B)
CRI	≥80
Beam Angle(°)	110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005


OPTICS



FEATURES & BENEFITS


CCT Selection DIP Switch	2CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	0.9
Certification	SAA / CE

INSTALLATION & ACCESSORIES





DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE	LUMEN(±5%)
Beam S6010	36W	AC220-240V	600x60	4100lm
Beam S6011	46W	AC220-240V	800x60	5200lm
Beam S6012	60W	AC220-240V	1000x60	6600lm
Beam S6013	80W	AC220-240V	1200x60	9200lm



SOTTILE 25


INDUSTRIAL LIGHTING
48V LED TRACK LIGHT

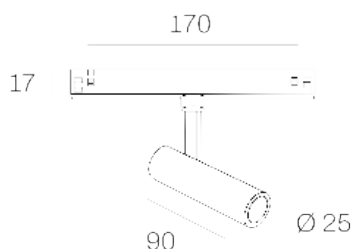

TECHNICAL DATA



Code	Color	Dimmable
Outer ring/Inner ring		
Sottile 25/BG/927	2700K Black / Gold	Dali Option
Sottile 25/BB/927	2700K Black / Black	Dali Option
Sottile 25/BW/927	2700K Black / White	Dali Option
Sottile 25/WW/927	2700K White / White	Dali Option
Sottile 25/WB/927	2700K White / Black	Dali Option
Sottile 25/WG/927	2700K White / Gold	Dali Option
Sottile 25/BG/930	3000K Black / Gold	Dali Option
Sottile 25/BB/930	3000K Black / Black	Dali Option
Sottile 25/BW/930	3000K Black / White	Dali Option
Sottile 25/WW/930	3000K White / White	Dali Option
Sottile 25/WB/930	3000K White / Black	Dali Option
Sottile 25/WG/930	3000K White / Gold	Dali Option
DALI 48V spot	Option Dali Dimmable	

Code	Sottile 25
Color	Black / Gold Black / Black Black / White White / White White / Black White / Gold
DiameterxHeight	Ø25x90mm
Dimmable	Yes (DALI Option)
Power	6W
Voltage	48V DC
CCT	2700K or 3000K
CRI	>90Ra
Lumen	210Lm
LED module	Bridgelux V4 HD LED
Beam Angle	40°
IP	20
Expected lifetime	70.000h (L90/B10)



SOTTILE 40


INDUSTRIAL LIGHTING
48V LED TRACK LIGHT

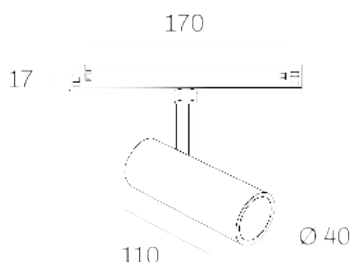

TECHNICAL DATA



Code	Color	Dimmable
Outer ring/Inner ring		
Sottile 40/BG/927	2700K Black / Gold	Dali Option
Sottile 40/BB/927	2700K Black / Black	Dali Option
Sottile 40/BW/927	2700K Black / White	Dali Option
Sottile 40/WW/927	2700K White / White	Dali Option
Sottile 40/WB/927	2700K White / Black	Dali Option
Sottile 40/WG/927	2700K White / Gold	Dali Option
Sottile 40/BG/930	3000K Black / Gold	Dali Option
Sottile 40/BB/930	3000K Black / Black	Dali Option
Sottile 40/BW/930	3000K Black / White	Dali Option
Sottile 40/WW/930	3000K White / White	Dali Option
Sottile 40/WB/930	3000K White / Black	Dali Option
Sottile 40/WG/930	3000K White / Gold	Dali Option
DALI 48V spot	Option Dali Dimmable	

Code	Sottile 40
Color	Black / Gold Black / Black Black / White White / White White / Black White / Gold
DiameterxHeight	Ø 40x110mm
Dimmable	Yes (DALI Option)
Power	12W
Voltage	48V DC
CCT	2700K or 3000K
CRI	>90Ra
Lumen	650Lm
LED module	Bridgelux V6 HD LED
Beam Angle	40°
IP	20
Expected lifetime	70.000h (L90/B10)



SOTTILE 50

INDUSTRIAL LIGHTING
48V LED TRACK LIGHT

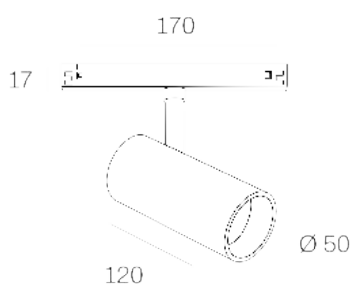

TECHNICAL DATA


Code	Color		Dimmable
	Outer ring/Inner ring		
Sottile 50/BG/927	2700K	Black / Gold	Dali Option
Sottile 50/BB/927	2700K	Black / Black	Dali Option
Sottile 50/BW/927	2700K	Black / White	Dali Option
Sottile 50/WW/927	2700K	White / White	Dali Option
Sottile 50/WB/927	2700K	White / Black	Dali Option
Sottile 50/WG/927	2700K	White / Gold	Dali Option
Sottile 50/BG/930	3000K	Black / Gold	Dali Option
Sottile 50/BB/930	3000K	Black / Black	Dali Option
Sottile 50/BW/930	3000K	Black / White	Dali Option
Sottile 50/WW/930	3000K	White / White	Dali Option
Sottile 50/WB/930	3000K	White / Black	Dali Option
Sottile 50/WG/930	3000K	White / Gold	Dali Option
DALI 48V spot	Option Dali Dimmable		

Code	Sottile 50
Color	Black/ Gold Black / Black Black / White White / White White / Black White / Gold
DiameterxHeight	Ø50x120mm
Dimmable	Yes (DALI Option)
Power	15W
Voltage	48V DC
CCT	2700K or 3000K
CRI	> 90Ra
Lumen	910Lm
LED module	Bridgelux V6 HD LED
Beam Angle	40°
IP	20
Expected lifetime	70.000h (L90/B10)



BANDA

INDUSTRIAL LIGHTING
48V LED TRACK LIGHT

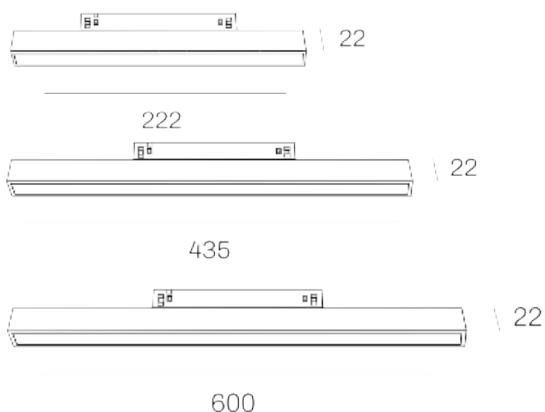

Code	Product specifications
Banda 25/W/927	222mm-2700K-10W-436lm-White
Banda 25/B/927	222mm-2700K-10W-436lm-Black
Banda 25/W/930	222mm-3000K-10W-436lm-White
Banda 25/B/930	222mm-3000K-10W-436lm-Black
Banda 50/W/927	435mm-2700K-20W-790lm-White
Banda 50/B/927	435mm-2700K-20W-790lm-Black
Banda 50/W/930	435mm-3000K-20W-790lm-White
Banda 50/B/930	435mm-3000K-20W-790lm-Black
Banda 60/W/927	600mm-2700K-30W-1075lm-White
Banda 60/B/927	600mm-2700K-30W-1075lm-Black
Banda 60/W/930	600mm-3000K-30W-1075lm-White
Banda 60/B/930	600mm-3000K-30W-1075lm-Black
DALI 48V spot	Option Dali Dimmable

TECHNICAL DATA

Code	Banda 25/50/60
Color	White or black
LxBxH	See image
Dimmable	Yes (DALI Option)
Power	10W/20W/30W
Voltage	48V DC
CCT	2700K or 3000K
CRI	>90Ra
Lumen	436/790/1075Lm
LED	Bridgelux SMD 2835
Beam Angle	120°
IP	20
PF	>0.9
Expected lifetime	50.000h (L90/B10)




LENTIGGINI

INDUSTRIAL LIGHTING
48V LED TRACK LIGHT



22

219



Code Color Dimmable

Lentiggini 48V/WB/927	2700K	White/Black	No
Lentiggini 48V/WB/927/Dali	2700K	White/Black	Dali
Lentiggini 48V/WW/927	2700K	White/White	No
Lentiggini 48V/WW/927/Dali	2700K	White/White	Dali
Lentiggini 48V/WG/927	2700K	White/Gold	No
Lentiggini 48V/WG/927/Dali	2700K	White/Gold	Dali
Lentiggini 48V/BW/927	2700K	Black/White	No
Lentiggini 48V/BW/927/Dali	2700K	Black/White	Dali
Lentiggini 48V/BB/927	2700K	Black/Black	No
Lentiggini 48V/BB/927/Dali	2700K	Black/Black	Dali
Lentiggini 48V/BG/927	2700K	Black/Gold	No
Lentiggini 48V/BG/927/Dali	2700K	Black/Gold	Dali
Lentiggini 48V/WB/930	3000K	White/Black	No
Lentiggini 48V/WB/930/Dali	3000K	White/Black	Dali
Lentiggini 48V/WW/930	3000K	White/White	No
Lentiggini 48V/WW/930/Dali	3000K	White/White	Dali
Lentiggini 48V/WG/930	3000K	White/Gold	No
Lentiggini 48V/WG/930/Dali	3000K	White/Gold	Dali
Lentiggini 48V/BW/930	3000K	Black/White	No
Lentiggini 48V/BW/930/Dali	3000K	Black/White	Dali
Lentiggini 48V/BB/930	3000K	Black/Black	No
Lentiggini 48V/BB/930/Dali	3000K	Black/Black	Dali
Lentiggini 48V/BG/930	3000K	Black/Gold	No
Lentiggini 48V/BG/930/Dali	3000K	Black/Gold	Dali


TECHNICAL DATA

Code	Lentiggini 48V
Color	Black / Black Black / White Black / Gold White / Black White / White White / Gold
LxW	219x22mm
Dimmable	Yes (DALI Option)
Power	10W
Voltage	48V DC
CCT	2700K or 3000K
CRI	>90Ra
Lumen	670Lm
LED	Bridgelux SMD 2835
Beam Angle	40°
IP	20
PF	>0.9
Expected lifetime	100.000h (L90/B10)



SALINA



INDUSTRIAL LIGHTING
48V LED TRACK LIGHT

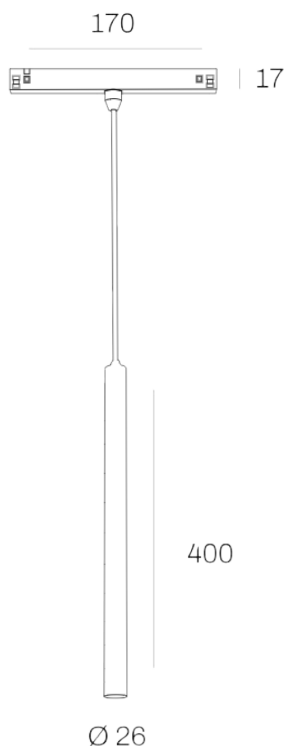

TECHNICAL DATA

Code	Salina 48V
Color	Black / Black Black / White Black / Gold White / White White / Black White / Gold
LxW	Ø25x400mm
Dimmable	Yes (DALI Option)
Power	7W
Voltage	48V DC
CCT	2700K
CRI	>90Ra
Lumen	300Lm
LED	Bridgelux V4 HD LED
Beam Angle	40°
IP	20
Expected lifetime	70.000h (L90/B10)

Code	Color	Dimmable
Salina 48V/BB/927	2700K Black / Black	Dali Option
Salina 48V/BW/927	2700K Black / White	Dali Option
Salina 48V/BG/927	2700K Black / Gold	Dali Option
Salina 48V/WW/927	2700K White / White	Dali Option
Salina 48V/WB/927	2700K White / Black	Dali Option
Salina 48V/WG/927	2700K White / Gold	Dali Option
DALI 48V spot	Option Dali Dimmable	



SURFACE MOUNTED TRACK RAIL

INDUSTRIAL LIGHTING
48V TRACK SYSTEM

5 years
warranty

CE

PRO-N110-W-PT	1M track (1000mm)	White	48V track rail assembly
PRO-N110-B-PT	1M track (1000mm)	Black	
PRO-N120-W-PT	2M track (2000mm)	White	48V track rail assembly
PRO-N120-B-PT	2M track (2000mm)	Black	
PRO-N130-W-PT	3M track (3000mm)	White	48V track rail assembly
PRO-N130-B-PT	3M track (3000mm)	Black	


For 3m track rails, an additional length surcharge is applied due to transport.

CONNECTING DIAGRAM

Low voltage single circuit DALI



48V 15A Max.

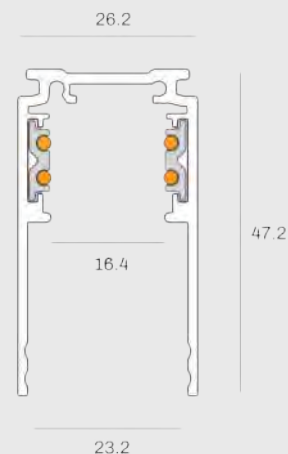

SURFACE MOUNTED DEEP TRACK RAIL INDUSTRIAL LIGHTING **48V TRACK SYSTEM**

5 years
warranty



PRO-DN110-W-PT	1M track (1000mm)	White	48V track rail assembly
PRO-DN110-B-PT	1M track (1000mm)	Black	
PRO-DN120-W-PT	2M track (2000mm)	White	48V track rail assembly
PRO-DN120-B-PT	2M track (2000mm)	Black	
PRO-DN130-W-PT	3M track (3000mm)	White	48V track rail assembly
PRO-DN130-B-PT	3M track (3000mm)	Black	



For 3m track rails, an additional length surcharge is applied due to transport.

CONNECTING DIAGRAM

Low voltage single circuit DALI



48V 15A Max.

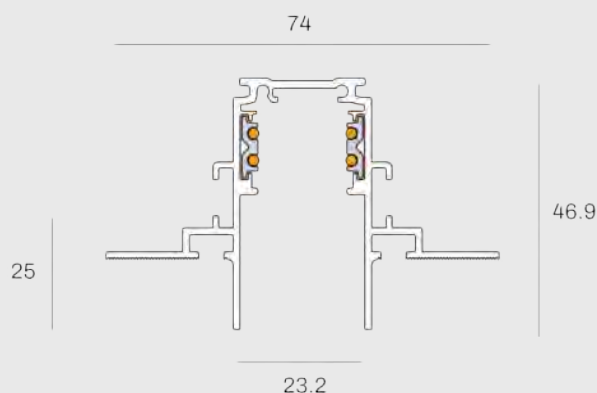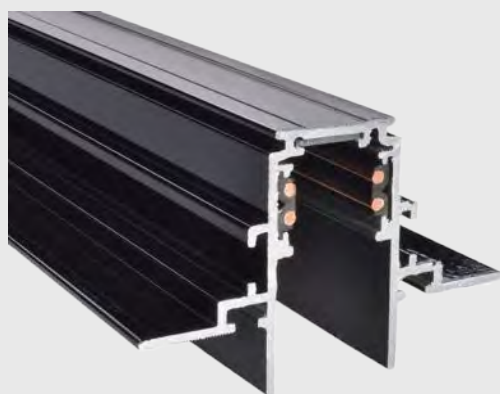

RECESSED MOUNTED TRACK RAIL

INDUSTRIAL LIGHTING
48V TRACK SYSTEM

5 years
warranty

CE

PRO-RN110-W-PT	1M track (1000mm)	White	48V track rail assembly
PRO-RN110-B-PT	1M track (1000mm)	Black	
PRO-RN120-W-PT	2M track (2000mm)	White	48V track rail assembly
PRO-RN120-B-PT	2M track (2000mm)	Black	
PRO-RN130-W-PT	3M track (3000mm)	White	48V track rail assembly
PRO-RN130-B-PT	3M track (3000mm)	Black	

For 3m track rails, an additional length surcharge is applied due to transport.

CONNECTING DIAGRAM




Low voltage single circuit DALI



48V 15A Max.

ACCESSORIES

INDUSTRIAL LIGHTING
48V TRACK SYSTEM



5 years
warranty




CONNECTION MODULE

PRO-N131L-W	Left	White
PRO-N131L-B	Left	Black
PRO-N131R-W	Right	White
PRO-N131R-B	Right	Black

END CAP

PRO-N132-W		White
PRO-N132-B		Black
PRO-DN132-W	Deep	White
PRO-DN132-B	Deep	Black
PRO-RN132-W	Recessed	White
PRO-RN132-B	Recessed	Black

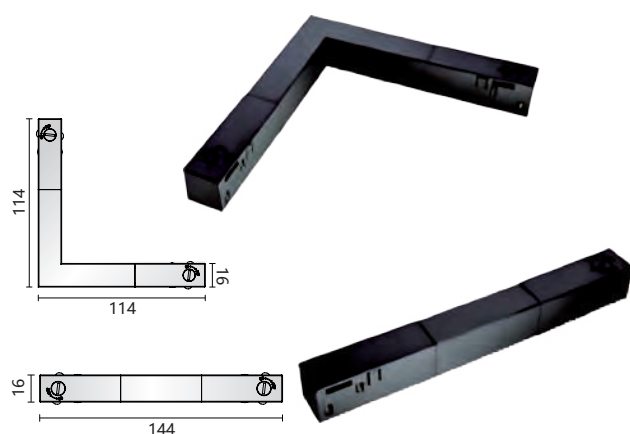

CONNECTOR I - L



PRO-N133-W	I	White
PRO-N133-B	I	Black
PRO-RN133-W	I	White
PRO-RN133-B	I	Black
PRO-N135-W	L	White
PRO-N135-B	L	Black

FLEXIBLE CONNECTOR

PRO-N139-W	Flex	White
PRO-N139-B	Flex	Black

ACCESSORIES

INDUSTRIAL LIGHTING
48V TRACK SYSTEM



5 years
warranty







CORNER PROFILE

PRO-N135FL-W	Left	White
PRO-N135FL-B	Left	Black
PRO-N135FR-W	Right	White
PRO-N135FR-B	Right	Black

DEEP CORNER PROFILE

PRO-DN135FL-W	Left	White
PRO-DN135FL-B	Left	Black
PRO-DN135FR-W	Right	White
PRO-DN135FR-B	Right	Black

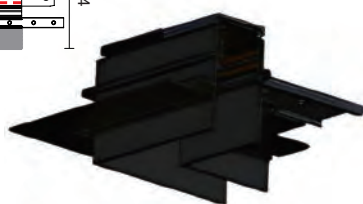

RECESSED CORNER PROFILE


PRO-RN135FL-W	Left	White
PRO-RN135FL-B	Left	Black
PRO-RN135FR-W	Right	White
PRO-RN135FR-B	Right	Black

WALL MOUNTED CORNER PROFILE

PRO-N135S-W	White	
PRO-N135S-B	Black	
PRO-DN135S-W	White	Deep
PRO-DN135S-B	Black	Deep
PRO-RN135S-W	White	Recessed
PRO-RN135S-B	Black	Recessed

ACCESSORIES


INDUSTRIAL LIGHTING
48V TRACK SYSTEM

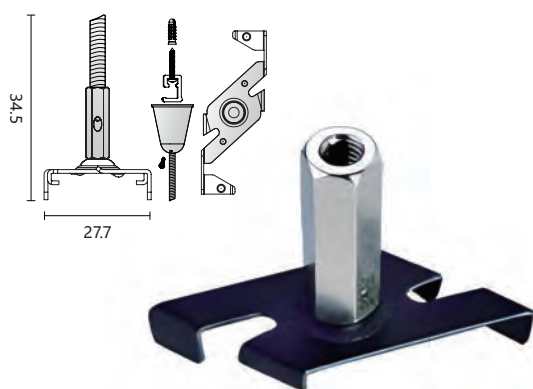

PENDANT SET WITH EZCLICK ROD

Incl. 1m M6 threaded rod, set of screws and ceiling cap


PRO-EZN147-W	White	PRO-EZN148-W
PRO-EZN147-B	Black	PRO-EZN148-B

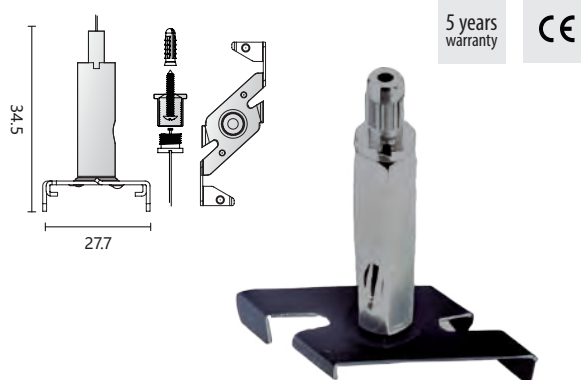

PENDANT SET WITH EZCLICK WIRE

Incl. 3m steel cable, set of screws and ceiling cap

PRO-EZN148-W	White
PRO-EZN148-B	Black

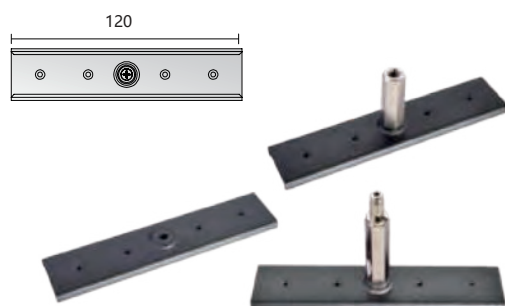


MOUNTING BRACKET

PRO-N1SK-W	White	Ceiling bracket
PRO-N1SK-B	Black	Ceiling bracket
PRO-N147-W	White	1m M6 threaded rod and ceiling cap
PRO-N147-B	Black	1m M6 threaded rod and ceiling cap
PRO-N148-W	White	3m steel cable and ceiling cap
PRO-N148-B	Black	3m steel cable and ceiling cap



TRACK COVER

PRO-CSN20-W	2m	White
PRO-CSN20-B	2m	Black

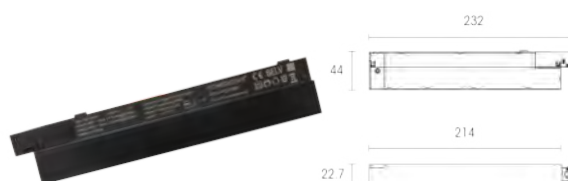

48V LED POWER SUPPLY


PRO-PS200W-W	White
PRO-PS200W-B	Black





MIRO 20 aluminum reflector
150 LM/W
12-35W multi-power driver (12W 14W 16W ... 32W 35W)

BEAM 0028W/0028B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT



This is with integrated designed of driver and adapter
Adopt brand Citizen COB led light source,high quality,
reliable performance. CRI90 CRI97 for options.Stan-
dard/honeycomb/shutter trims available.

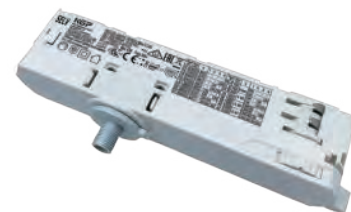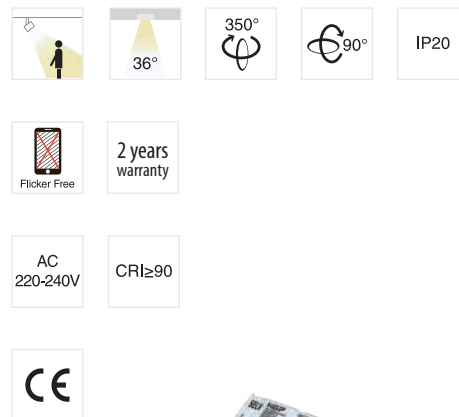

Materials of Housing : Aluminium
Materials of Optics : Alanod MIRO 20 aluminum + Glass

12W	14W	16W	18W	20W	22W	24W	26W	28W	30W	32W	35W
300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0028W/3000K	White	35W (12-35W multi-power)	145Lm/W	>90	Non-dimmable	3000K	Ø90x130mm
Beam 0028W/4000K	White	35W (12-35W multi-power)	150Lm/W	>90	Non-dimmable	4000K	Ø90x130mm
Beam 0028B/3000K	Black	35W (12-35W multi-power)	145Lm/W	>90	Non-dimmable	3000K	Ø90x130mm
Beam 0028B/4000K	Black	35W (12-35W multi-power)	150Lm/W	>90	Non-dimmable	4000K	Ø90x130mm




MIRO 20 aluminum reflector
150 LM/W
12-35W multi-power driver (12W 14W 16W ... 32W 35W)

BEAM 0029W/0029B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT



This is with integrated designed of driver and adapter
Adopt brand Citizen COB led light source,high quality,
reliable performance. CRI90 CRI97 for options.Stan-
dard/honeycomb/shutter trims available.

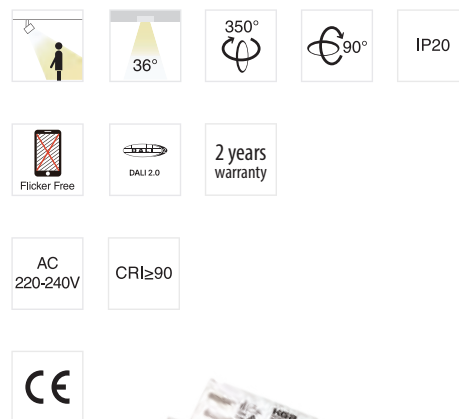

Materials of Housing: Aluminium
Materials of Optics : Alanod MIRO 20 aluminum + Glass

12W	14W	16W	18W	20W	22W	24W	26W	28W	30W	32W	35W
300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0029W/3000K	White	35W (12-35W multi-power)	145Lm/W	>90	DALI-dimmable	3000K	Ø90x130mm
Beam 0029W/4000K	White	35W (12-35W multi-power)	150Lm/W	>90	DALI-dimmable	4000K	Ø90x130mm
Beam 0029B/3000K	Black	35W (12-35W multi-power)	145Lm/W	>90	DALI-dimmable	3000K	Ø90x130mm
Beam 0029B/4000K	Black	35W (12-35W multi-power)	150Lm/W	>90	DALI-dimmable	4000K	Ø90x130mm




MIRO 20 aluminum reflector
145 LM/W
8-15W multi-power driver (8W 10W 12W 14W)

BEAM 0114W/0114B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT



This is with integrated designed of driver and adapter
Adopt brand Citizen COB led light source,high quality,
reliable performance. CRI90 CRI97 for options.Stan-
dard/honeycomb/shutter trims available.

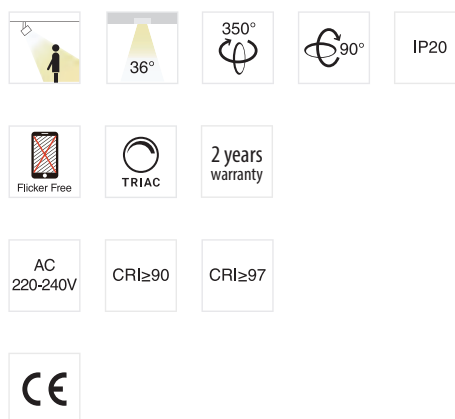

Materials of Housing: Aluminium
Materials of Optics : Alanod MIRO 20 aluminum + Glass

8W 10W 12W 15W
200mA 250mA 300mA 350mA

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0114W	White	10W (8-14W multi-power)	145Lm/W	>90	TRIAC-dimmable	3000K	Ø65x150mm
Beam 0114B	Black	10W (8-14W multi-power)	145Lm/W	>90	TRIAC-dimmable	3000K	Ø65x150mm


BEAM 0114.1G Inner Ring Gold
BEAM 0114.1B Inner Ring Black
BEAM 0114.1W Inner Ring White



MIRO 20 aluminum reflector
150 LM/W
8-25W multi-power driver (8W 10W 12W ... 22W 25W)

BEAM 0103W/0103B BEAM 0104W/0104B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT



This is with integrated designed of driver and adapter
Adopt brand Citizen COB led light source,high quality,
reliable performance. CRI90 CRI97 for options.Stan-
dard/honeycomb/shutter trims available.



Materials of Housing: Aluminium

Materials of Optics : Alanod MIRO 20 aluminum + Glass

8W 10W 12W 14W 16W 18W 20W 22W 25W
200mA 250mA 300mA 350mA 400mA 450mA 500mA 550mA 600mA


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0103W	White	20W (8-25W multi-power)	145Lm/W	>90	Non-dimmable	3000K	Ø75x160mm
Beam 0103B	Black	20W (8-25W multi-power)	145Lm/W	>90	Non-dimmable	3000K	Ø75x160mm
Beam 0104W	White	20W (8-25W multi-power)	150Lm/W	>90	Non-dimmable	4000K	Ø75x160mm
Beam 0104B	Black	20W (8-25W multi-power)	150Lm/W	>90	Non-dimmable	4000K	Ø75x160mm





MIRO 20 aluminum reflector
150 LM/W
12-35W multi-power driver (12W 14W 16W ... 32W 35W)

BEAM 0105W/0105B BEAM 0106W/0106B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT



This is with integrated designed of driver and adapter
Adopt brand Citizen COB led light source,high quality,
reliable performance. CRI90 CRI97 for options.Stan-
dard/honeycomb/shutter trims available.

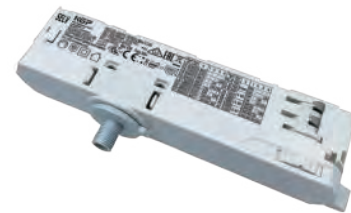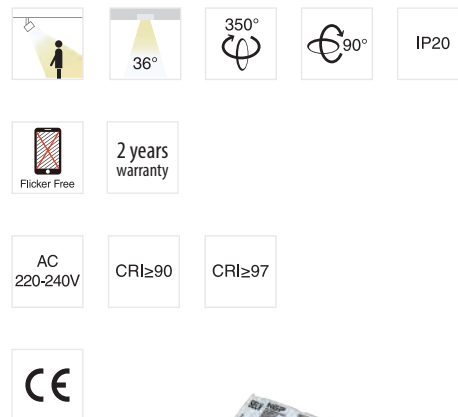

Materials of Housing: Aluminium
Materials of Optics : Alanod MIRO 20 aluminum + Glass


12W	14W	16W	18W	20W	22W	24W	26W	28W	30W	32W	35W
300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0105W	White	28W (12-35W multi-power)	145Lm/W	>90	Non-dimmable	3000K	Ø85x170mm
Beam 0105B	Black	28W (12-35W multi-power)	145Lm/W	>90	Non-dimmable	3000K	Ø85x170mm
Beam 0106W	White	28W (12-35W multi-power)	150Lm/W	>90	Non-dimmable	4000K	Ø85x170mm
Beam 0106B	Black	28W (12-35W multi-power)	150Lm/W	>90	Non-dimmable	4000K	Ø85x170mm



BEAM 0705W/0705B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT

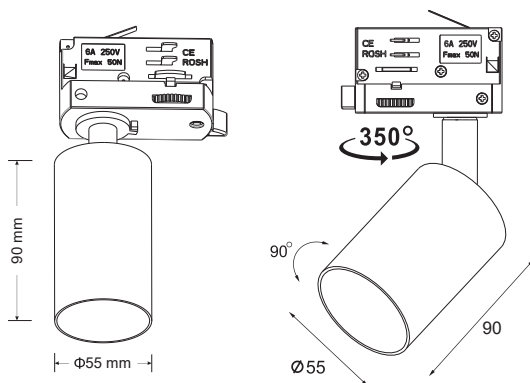

PRODUCT FEATURES


Aluminium housing
Powder coating finish
GU10 not included

VERSIONS

Beam 0705W
Beam 0705B


TECHNICAL DATA

Code	Beam 0705W/0705B
Device color	White or Black
Diameter x Height	Ø55x90mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max.10W
Voltage	220-240V 50-60Hz
Fitting	GU10
IP	20



BEAM 0714W

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT

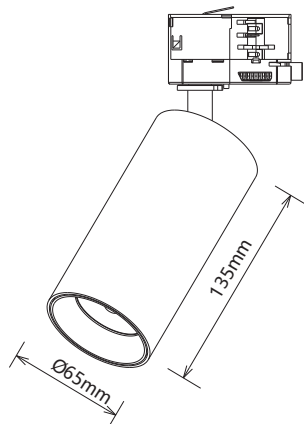

PRODUCT FEATURES

Driver included
Aluminium housing
Powder coating finish

VERSIONS

Beam 0714W White

OPTION

Beam 0714.1G Inner ring gold
Beam 0714.1B Inner ring black
Beam 0714.1W Inner ring white



TECHNICAL DATA

Code	Beam 0714W
Device Color	White
Diameter x Height	Ø65x135mm
Class	LED
Adjustable	Yes
Dimmable	Triac dimming
Power	10W
Lumen	956Lm
Voltage	220-240 50-60Hz
CCT	3000K
CRI	> 90
Beam Angle	36°
IP	20



BEAM 0603W/0603B BEAM 0604W

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT

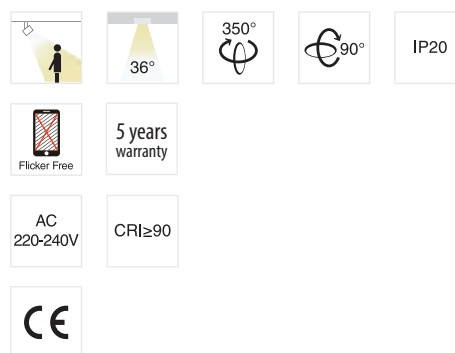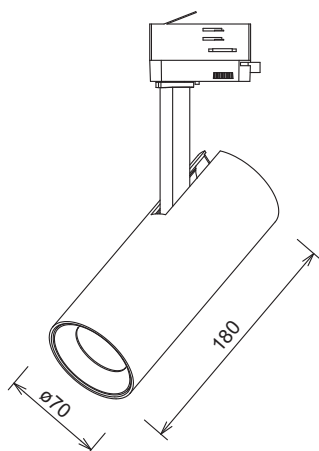

PRODUCT FEATURES

Including:
CREE CXB1512 LED module
Philips Xitanium driver

Code	Color	CCT	Lumen
Beam 0603W	White	3000K	1750Lm
Beam 0604W	White	4000K	1850Lm
Beam 0603B	Black	3000K	1750Lm



TECHNICAL DATA

Code	Beam 0603W/0603B Beam 0604W
Device Color	White or Black
Diameter x Height	Ø70x180mm
Class	LED
Adjustable	Yes
Dimmable	Not dimmable
Power	20W
Voltage	220-240V
CCT	3000K or 4000K
CRI	>90
Lumen	1750Lm or 1850Lm
Beam Angle	36°
IP	20
Flux code	98 100 100 99 100



BEAM 0605B BEAM 0606W/0606B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT

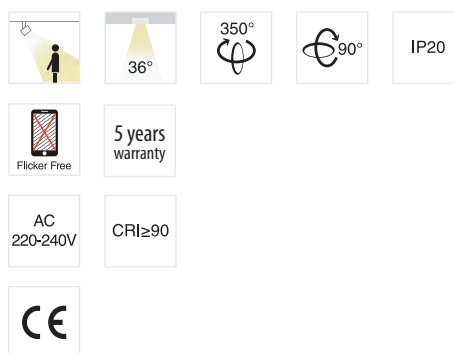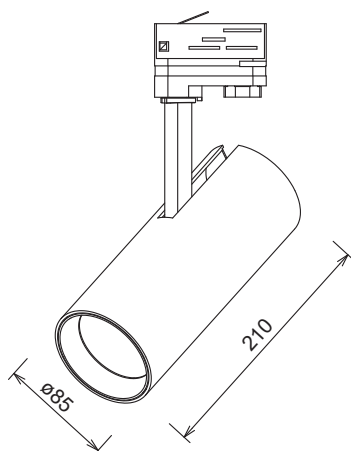

PRODUCT FEATURES

Including:
CREE CXB1512 LED module
Philips Xitanium driver

Code	Color	CCT	Lumen
Beam 0606W	White	4000K	2950Lm
Beam 0605B	Black	3000K	2700Lm
Beam 0606B	Black	4000K	2950Lm



TECHNICAL DATA

Code	Beam 0605B Beam 0606W/0606B
Device Color	White or Black
Diameter x Height	Ø85x210mm
Class	LED
Adjustable	Yes
Dimmable	Not dimmable
Power	28W
Voltage	220-240V
CCT	3000K or 4000K
CRI	>90
Lumen	2700Lm ofr2950Lm
Beam Angle	36°
IP	20
Flux code	98 100 100 99 100



BEAM 0607W/0607B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT

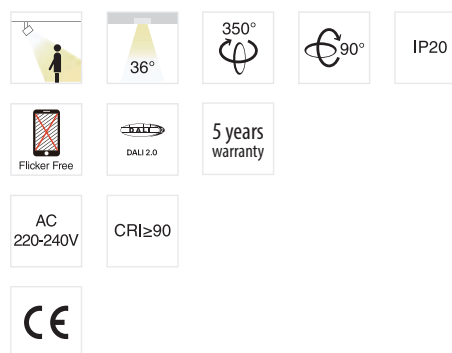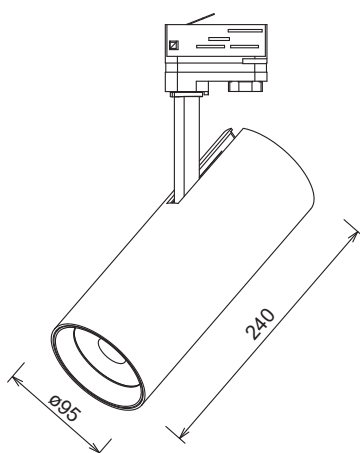

PRODUCT FEATURES

Including:
CREE CXB1512 LED module
Philips Xitanium driver

Code	Color
Beam 0607W	White
Beam 0607B	Black



TECHNICAL DATA

Code	Beam 0607W/0607B
Device Color	White or Black
Diameter x Height	Ø95x240mm
Class	LED
Adjustable	Yes
Dimmable	DALI dimmable
Power	35W
Voltage	220-240V
CCT	3000K
CRI	> 90
Lumen	3250Lm
Beam Angle	36°
IP	20
Flux code	98 100 100 99 100



BEAM 0702W/0702B BEAM 0703W/0703B

INDUSTRIAL LIGHTING
3-CIRCUIT LED TRACK LIGHT

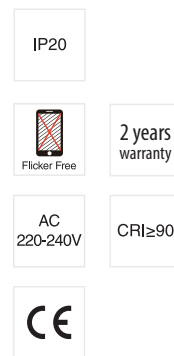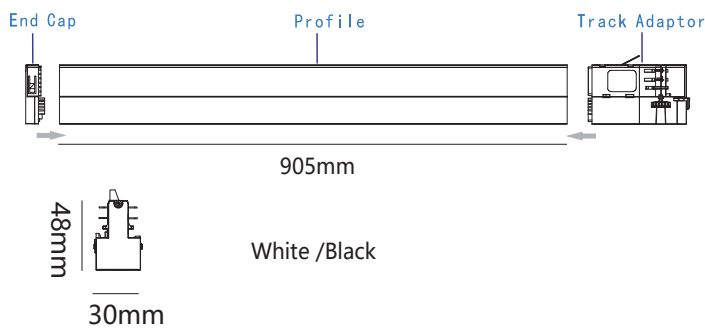

PRODUCT FEATURES


- o Colour consistency: SDCM < 4
- o Lifetime: 50,000H (L80/B10)
- o Including:
 - SMD2835 LED (91pcs)
 - Flicker - free driver in track adapter

VERSIONS

Code	CCT	Colour
Beam 0702B	3000K	Black
Beam 0702W	3000K	White
Beam 0703B	4000K	Black
Beam 0703W	4000K	White



TECHNICAL DATA

Code	Beam 0702W/0702B Beam 0703W/0703B
Device colour	White or Black
LxBxH	905x30x48mm
Class	LED
Adjustable	No
Dimmable	No
Power	20W
Voltage	220 - 240V
CCT	3000K or 4000K
CRI	> 80
Output lumen	2000Lm
Beam angle	120°
IP	20
PF	> 0.95



TRACK RAILS

INDUSTRIAL LIGHTING 3-CIRCUIT TRACK SYSTEM

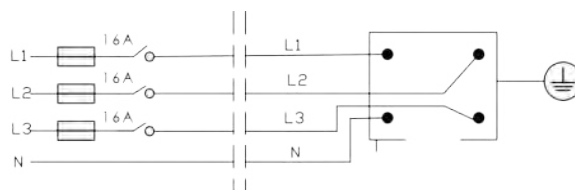

3 phase 220-250V 3x16A Max

5 years
warranty

CE

PRO-0410-W	1M track (1000mm)	☐ White	3-phase surface-mounted track rail
PRO-0410-B	1M track (1000mm)	☒ Black	
PRO-0610-W	1M DALI track (1000mm)	☐ White	3-phase DALI surface-mounted track rail
PRO-0610-B	1M DALI track (1000mm)	☒ Black	
PRO-0420-W	2M track (2000mm)	☐ White	3-phase surface-mounted track rail
PRO-0420-B	2M track (2000mm)	☒ Black	
PRO-0620-W	2M DALI track (2000mm)	☐ White	3-phase DALI surface-mounted track rail
PRO-0620-B	2M DALI track(2000mm)	☒ Black	
PRO-0430-W	3M track (3000mm)	☐ White	3-phase surface-mounted track rail
PRO-0430-B	3M track (3000mm)	☒ Black	
PRO-0630-W	3M DALI track (3000mm)	☐ White	3-phase DALI surface-mounted track rail
PRO-0630-B	3M DALI track (3000mm)	☒ Black	

For 3m track rails, an additional length surcharge is applied due to transport.

ACCESSORIES



INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM


TRACK COVER STRIP 3M

Track cover strip for 3m 3-phase track rail (white):

PRO-CS04300-W ☐

Track cover strip for 3m 3-phase track rail (black):


PRO-CS04300-B ☒



3-CIRCUIT TRACK ADAPTER


PRO-0222-W ☐

PRO-0222-B ☒



PRO-D680-W ☐ DALI

PRO-D680-B ☒ DALI



Option: strain relief

PRO-M510-W


PRO-M510-B



MIDDLE CONNECTOR


PRO-0434-W ☐

PRO-0434-B ☒



PRO-D634-W ☐ DALI

PRO-D634-B ☒ DALI



TWISTED T-CONNECTOR

Adjustable T-connection right:


PRO-M436R-W ☐

PRO-M436R-B ☒

Adjustable T-connection left:

PRO-M436L-W ☐

PRO-M436L-B ☒



ACCESSORIES



INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM



T-CONNECTOR RIGHT

Neutral outside:

- PRO-0436 R1-W ☐ Right
- PRO-0436 R1-B ☒ Right
- PRO-D636 R2-W ☐ DALI Right
- PRO-D636 R2-B ☒ DALI Right

Neutral inside:

- PRO-0436 R2-W ☐ Right
- PRO-0436 R2-B ☒ Right
- PRO-D636 R1-W ☐ DALI Right
- PRO-D636 R1-B ☒ DALI Right





T-CONNECTOR LEFT

Neutral outside:

- PRO-0436 L1-W ☐ Left
- PRO-0436 L1-B ☒ Left
- PRO-D636 L2-W ☐ DALI Left
- PRO-D636 L2-B ☒ DALI Left

Neutral inside:

- PRO-0436 L2-W ☐ Left
- PRO-0436 L2-B ☒ Left
- PRO-D636 L1-W ☐ DALI Left
- PRO-D636 L1-B ☒ DALI Left





ACCESSORIES



INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM



CONNECTOR

- PRO-0431 L-W ☐ Left
- PRO-0431 R-W ☐ Right
- PRO-0431 L-B ☒ Left
- PRO-0431 R-B ☒ Right
- PRO-D631 L-W ☐ DALI Left
- PRO-D631 R-W ☐ DALI Right
- PRO-D631 L-B ☒ DALI Left
- PRO-D631 R-B ☒ DALI Right




COUPLER

- PRO-0433-W ☐
- PRO-0433-B ☒
- PRO-D633-W ☐ DALI
- PRO-D633-B ☒ DALI




END CAP

- PRO-0432-W ☐
- PRO-0432-B ☒



FIXED MONOPOINT

- PRO-C100-W ☐
- PRO-C100-B ☒



This can also be placed on DALI track rails.

ACCESSORIES




INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM

CONNECTION PIECE FOR SUSPENDED RAIL

PRO-0418SK-W ☐

PRO-0418SK-B ☒




Connection piece 181mm
for suspended rail or
steel cable.




SCHUKO ADAPTER

PRO-4230V-W ☐

PRO-4230V-B ☒



4 Wires 3 circuits track system diagram
6 Wires 3 circuits DALI track system diagram

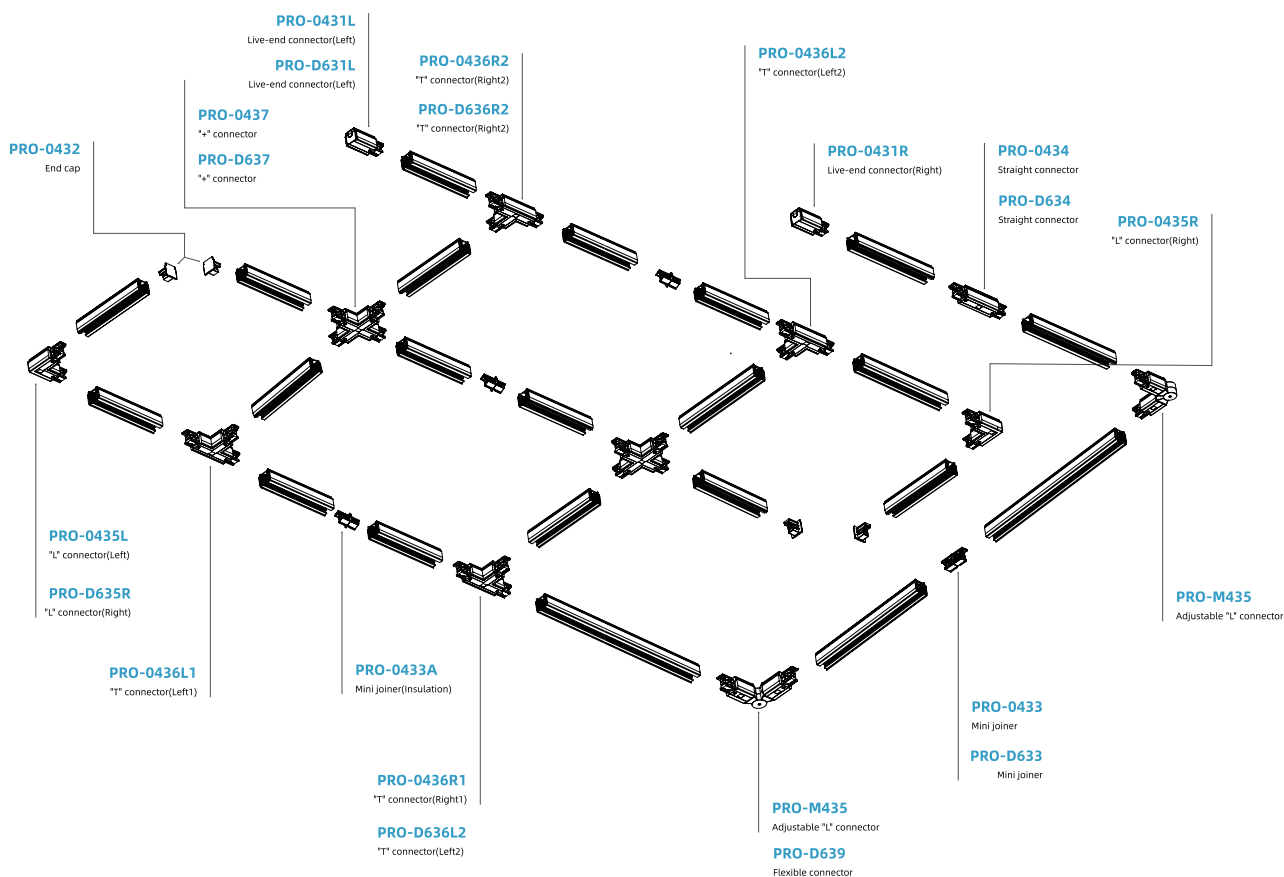

ACCESSORIES





INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM

L-CONNECTOR - NEUTRAL OUTSIDE

PRO-0435 L-W ☐ Left
PRO-0435 L-B ☒ Left



PRO-D635 L-W ☐ DALI Left
PRO-D635 L-B ☒ DALI Left



L-CONNECTOR - NEUTRAL INSIDE

PRO-0435 R-W ☐ Right
PRO-0435 R-B ☒ Right

PRO-D635 R-W ☐ DALI Right
PRO-D635 R-B ☒ DALI Right



ACCESSORIES




INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM

TWISTED L-CONNECTOR

PRO-M438-W ☐

PRO-M438-B ☒



1



2


FLEXIBLE CONNECTOR

PRO-0439-W ☐

PRO-0439-B ☒

PRO-D639-W ☐ DALI

PRO-D639-B ☒ DALI





X-CONNECTOR

PRO-0437-W ☐

PRO-0437-B ☒

PRO-D637-W ☐ DALI

PRO-D637-B ☒ DALI




ACCESSORIES



INDUSTRIAL LIGHTING
3-CIRCUIT TRACK SYSTEM


ROD SUSPENSION EZCLICK

PRO-EZ0447-W ☐ 1m M6 rod, ceiling
PRO-EZ0447-B ☒ attachment and cap




WIRE SUSPENSION EZCLICK

PRO-EZ0448-W ☐ 5m wire, ceiling
PRO-EZ0448-B ☒ attachment and cap




WIRE SUSPENSION EZCLICK

PRO-EZ0449-W ☐ 5m wire and ceiling
PRO-EZ0449-B ☒ attachment




WIRE SUSPENSION EZCLICK

PRO-EZ0449-1.5-W ☐ 1,5m wire and ceiling
PRO-EZ0449-1.5-B ☒ attachment




SUSPENSION HOOK

PRO-M142-W ☐
PRO-M142-B ☒



MOUNTING CLAMP



PRO-04SK-W ☐
PRO-04SK-B ☒





BEAM 0673W/0673B

INDUSTRIAL LIGHTING
1-CIRCUIT LED TRACK LIGHT

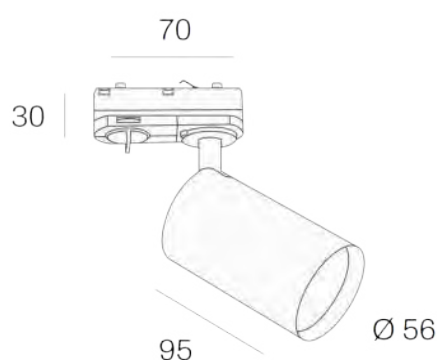

PRODUCT FEATURES

Aluminium housing
Powder coating finish
GU10 not included

VERSIONS

Beam 0673W White
Beam 0673B Black



TECHNICAL DATA

Code	Beam 0673W/0673B
Device Color	White or black
Diameter x Height	Ø56x95mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max. 10W
Voltage	220-240 50-60Hz
Fitting	GU10
IP	20



BEAM 0674W/0674B

INDUSTRIAL LIGHTING
1-CIRCUIT LED TRACK LIGHT

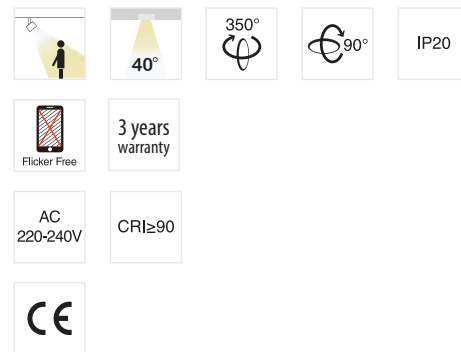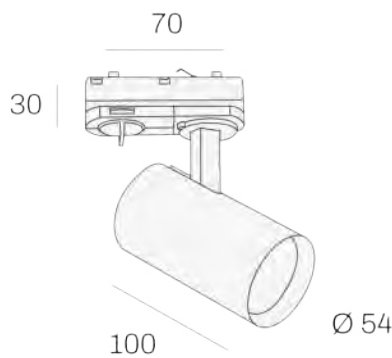

PRODUCT FEATURES

Aluminium housing
Powder coating finish
Bridgelux V6 LED module
Expected lifetime: 70.000h (L90/B10)
Option: 3000K available on request

VERSIONS

Beam 0674WW	White / white
Beam 0674WB	White / Black
Beam 0674WG	White / Gold
Beam 0674BB	Black / Black
Beam 0674BW	Black / White
Beam 0674BG	Black / Gold



TECHNICAL DATA

Code	Beam 0674WW/WB/ WG/BB/BW/BG
Device Color	White or black with inner ring white, black or gold
Diameter x Height	Ø54x100mm
Class	LED
Adjustable	Yes
Dimmable	Triac dim
Power	8W
Voltage	220-240V
CCT	2700K
CRI	> 90Ra
Lumen	700Lm
Beam Angle	40°
IP	20



BEAM 0675W/0675B

INDUSTRIAL LIGHTING
1-CIRCUIT LED TRACK LIGHT

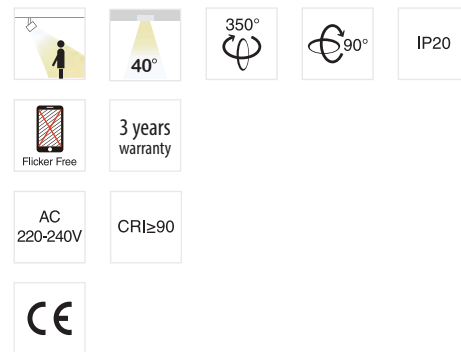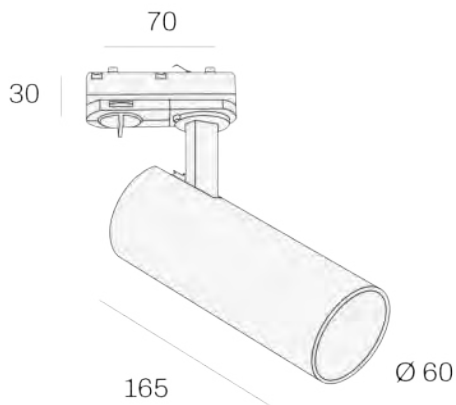

PRODUCT FEATURES

Aluminium housing
Powder coating finish
Bridgelux V10 LED module
Expected lifetime: 70.000h (L90/B10)
Option: 3000K available on request

VERSIONS

Beam 0675WW	White / white
Beam 0675WB	White / Black
Beam 0675WG	White / Gold
Beam 0675BB	Black / Black
Beam 0675BW	Black / White
Beam 0675BG	Black / Gold



TECHNICAL DATA

Code	Beam 0675WW/WB/ WG/BB/BW/BG
Device Color	White or black with inner ring white, black or gold
Diameter x Height	Ø60x165mm
Class	LED
Adjustable	Yes
Dimmable	Triac dim
Power	15W
Voltage	220-240V
CCT	2700K
CRI	>90Ra
Lumen	1100Lm
Beam Angle	40°
IP	20



BEAM 0676W/0676B

INDUSTRIAL LIGHTING
1-CIRCUIT LED TRACK LIGHT

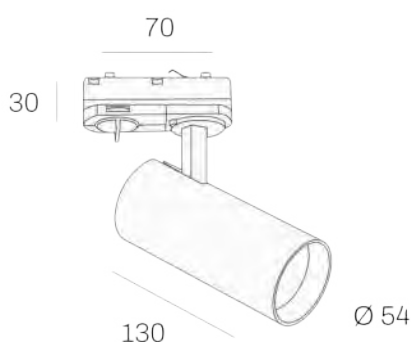

PRODUCT FEATURES

Aluminium housing
Powder coating finish
GU10 not included

VERSIONS

Beam 0676WW	White / white
Beam 0676WB	White / Black
Beam 0676WG	White / Gold
Beam 0676BB	Black / Black
Beam 0676BW	Black / White
Beam 0676BG	Black / Gold


TECHNICAL DATA

Code	Beam 0676WW/WB/ WG/BB/BW/BG
Device Color	White or black with inner ring white, black or gold
Diameter x Height	Ø54x130mm
Class	LED
Adjustable	Yes
Dimmable	Depends on type GU10
Power	Max. 10W
Voltage	220-240 50-60Hz
Fitting	GU10
IP	20



BEAM 0677W/0677B

INDUSTRIAL LIGHTING
1-CIRCUIT LED TRACK LIGHT

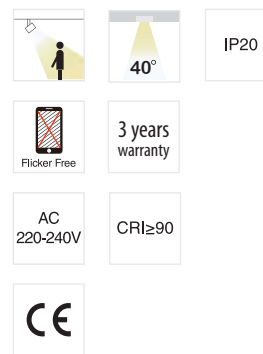

PRODUCT FEATURES


Pendant light
Aluminium housing
Powder coating finish
Bridgelux V10 LED module
Expected lifetime: 70.000h (L90/B10)
Option: 3000K available on request

VERSIONS

Beam 0677WW	White / white
Beam 0677WB	White / Black
Beam 0677WG	White / Gold
Beam 0677BB	Black / Black
Beam 0677BW	Black / White
Beam 0677BG	Black / Gold


TECHNICAL DATA

Code	Beam 0677WW/WB/ WG/BB/BW/BG
Device Color	White or black with inner ring white, black or gold
Diameter x Height	Ø60x165mm
Class	LED
Adjustable	Yes
Dimmable	Triac dim
Power	15W
Voltage	220-240V
CCT	2700K
CRI	>90Ra
Lumen	1100Lm
Beam Angle	40°
IP	20

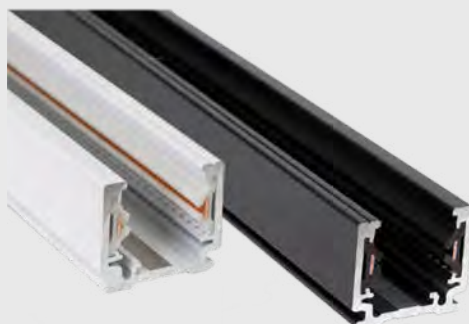


TRACK RAILS

INDUSTRIAL LIGHTING
1-CIRCUIT TRACK SYSTEM



Connecting diagram:

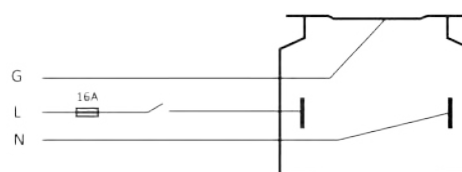

5 years
warranty

CE

PRO-S110-W	1M track (1000mm)	☐ White	1-phase surface-mounted track rail
PRO-S110-B	1M track (1000mm)	☒ Black	

PRO-S120-W	2M track (2000mm)	☐ White	1-phase surface-mounted track rail
PRO-S120-B	2M track (2000mm)	☒ Black	

PRO-S130-W	3M track (3000mm)	☐ White	1-phase surface-mounted track rail
PRO-S130-B	3M track (3000mm)	☒ Black	

For 3m track rails, an additional length surcharge is applied due to transport.

ACCESSORIES

INDUSTRIAL LIGHTING
1-CIRCUIT TRACK SYSTEM

TRACK COVER STRIP 2M

Track cover strip for 2m 1-phase track rail (white):

PRO-CSN20-W ☐ White

Track cover strip for 2m 1-phase track rail (black):

PRO-CSN20-B ☒ Black



CONNECTOR

5 years
warranty





PRO-S131 L-W ☐ White

PRO-S131 L-B ☒ Black

PRO-S131 R-W ☐ White


PRO-S131 R-B ☒ Black



END CAP

PRO-S132-W ☐ White


PRO-S132-B ☒ Black



COUPLER

PRO-S133-W ☐ White

PRO-S133-B ☒ Black




ACCESSORIES

INDUSTRIAL LIGHTING
1-CIRCUIT TRACK SYSTEM

STRAIGHT CONNECTOR

PRO-S134-W ☐ White
PRO-S134-B ☒ Black

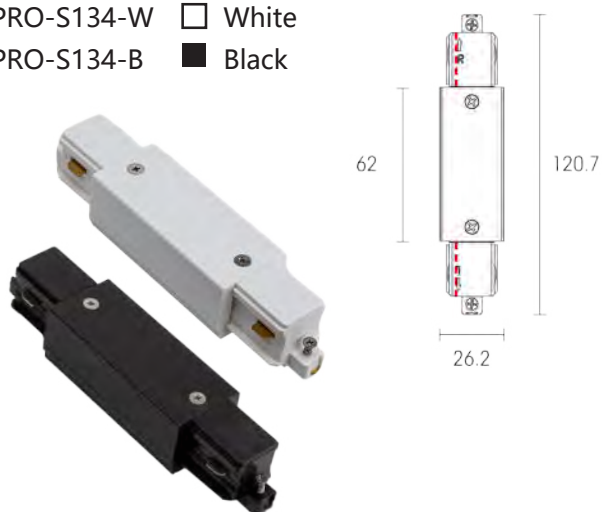


L-CONNECTOR

5 years
warranty



PRO-S135 L-W ☐ White
PRO-S135 L-B ☒ Black


PRO-S135 R-W ☐ White
PRO-S135 R-B ☒ Black

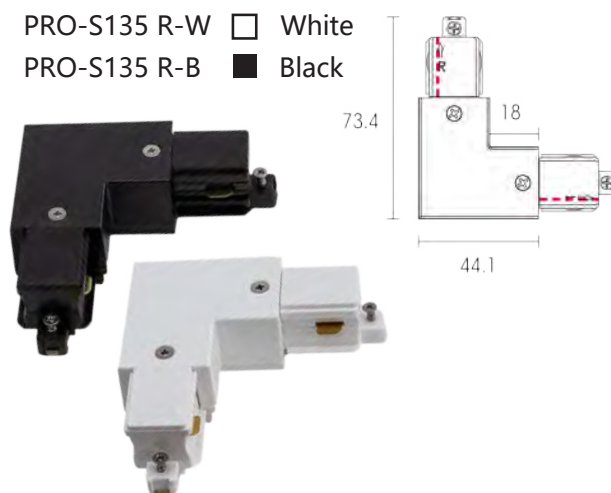

T-CONNECTOR - neutral outside

PRO-S136 L1-W ☐ White
PRO-S136 L1-B ☒ Black

PRO-S136 R1-W ☐ White
PRO-S136 R1-B ☒ Black

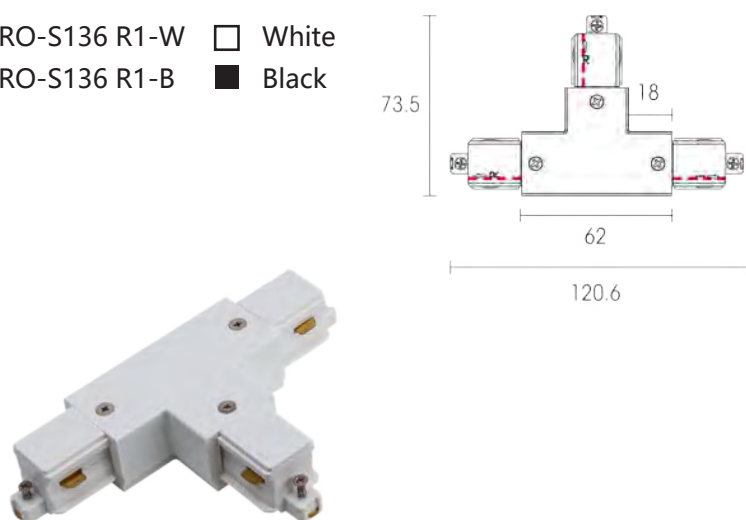

T-CONNECTOR - neutral inside

PRO-S136 L2-W ☐ White
PRO-S136 L2-B ☒ Black

PRO-S136 R2-W ☐ White
PRO-S136 R2-B ☒ Black




ACCESSORIES

INDUSTRIAL LIGHTING
1-CIRCUIT TRACK SYSTEM

X-CONNECTOR

PRO-S137-W ☐ White
PRO-S137-B ☒ Black

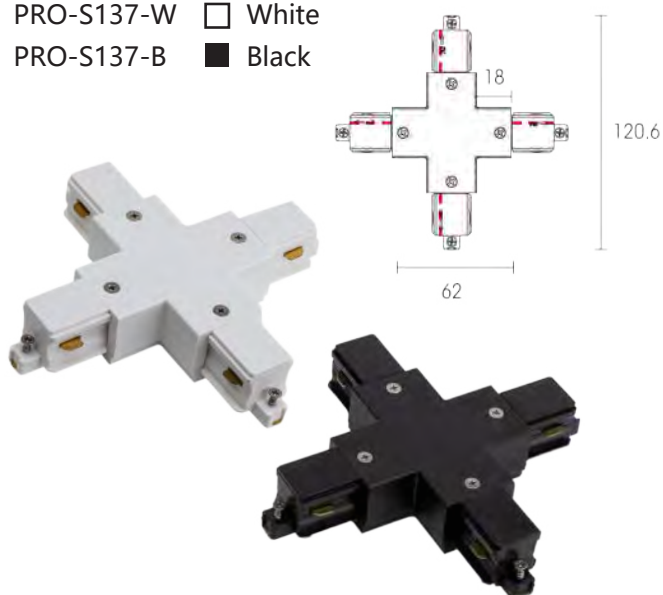


ADAPTER

5 years
warranty



PRO-S140A-W ☐ White
PRO-S140A-B ☒ Black

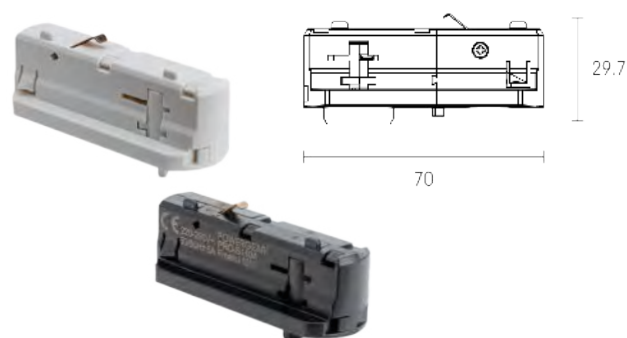


Option: strain relief
PRO-M210-W
PRO-M210-B




MOUNTING CLAMP

PRO-N1SK-W ☐ White
PRO-N1SK-B ☒ Black



SUSPENSION SET WITH CLAMP


PRO-N149-W ☐ White
PRO-N149-B ☒ Black

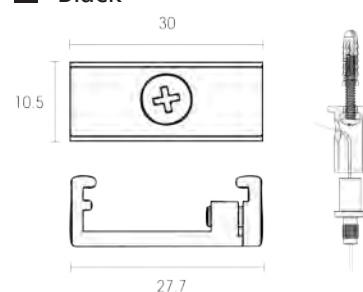




Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.





The light turns on when motion is detected within the sensor range and turns off automatically after a set time.

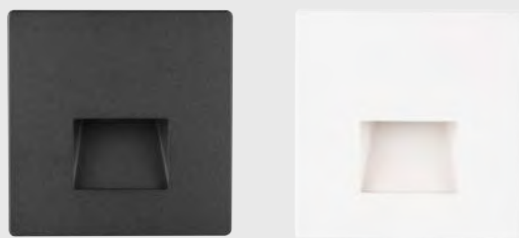

BEAM R6020W-3W/R6020B-3W

DECORATIVE LIGHTING
LED STEP LIGHT

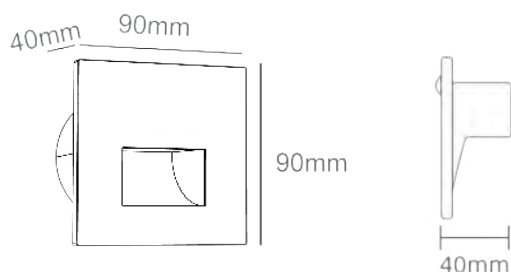


PRODUCT FEATURES

Waterproof
Dustproof



TECHNICAL DATA

Code	Beam R6020
Device Color	White or black
LxWxH	90x90x40mm
Cut-out Size	Ø75mm
Class	LED
Dimmable	No
Power	3W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	65

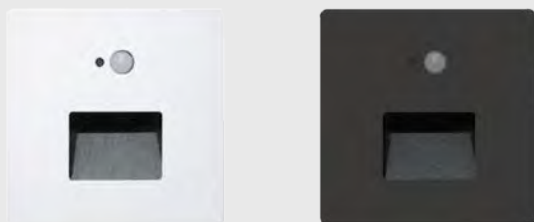

BEAM R6020W-3W-S/R6020B-3W-S

DECORATIVE LIGHTING
LED STEP LIGHT

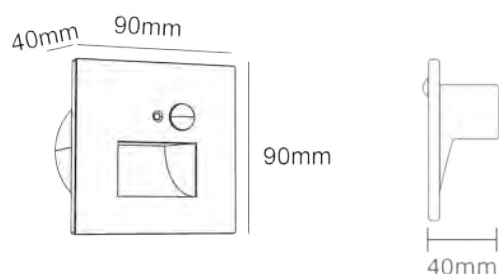

PRODUCT FEATURES

PIR Sensor
Waterproof
Dustproof


TECHNICAL DATA

Code	Beam R6020
Device Color	White or black
LxWxH	90x90x40mm
Cut-out Size	Ø75mm
Class	LED
Dimmable	No
Power	3W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	65



Product characteristics

- Long life of LED light source, once construction, several years of use
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance




The light turns on when motion is detected within the sensor range and turns off automatically after a set time.



BEAM 0039W/0039B

DECORATIVE LIGHTING
LED STEP LIGHT

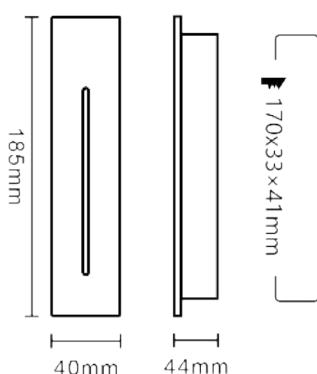

PRODUCT FEATURES

Waterproof
Dustproof



TECHNICAL DATA

Code	Beam 0039W/0039B
Device Color	White or black
LxWxH	185x40x44mm
Cut-out Size	170x33x41mm
Class	LED
Dimmable	No
Power	3W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	65



BEAM 0039W-S/0039B-S

DECORATIVE LIGHTING
LED STEP LIGHT

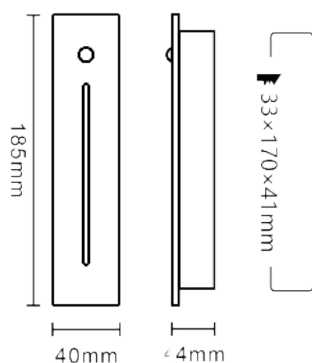


PRODUCT FEATURES

PIR Sensor
Waterproof
Dustproof

TECHNICAL DATA

Code	Beam 0039W-S / 0039B-S
Device Color	White or black
LxWxH	185x40x44mm
Cut-out Size	170x33x41mm
Class	LED
Dimmable	No
Power	3W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	65



BEAM R6010W

DECORATIVE LIGHTING
LED STEP LIGHT



85mm

H:38mm

85mm



IP20



AC
220-240V



RoHS



CE



2 years
warranty

PRODUCT FEATURES

Including:
700mA driver
LED

Option:
350mA driver

Deep recessed box (as shown)
available with screws.
(Box Beam R6010)




TECHNICAL DATA

Code	Beam R6010W
Device Color	White
LxWxH	85 x85 x38mm
Cut-out Size	Ø58mm
Class	LED
Dimmable	No
Power	3W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	20



BEAM 0350W/0350B

DECORATIVE LIGHTING
LED STEP LIGHT

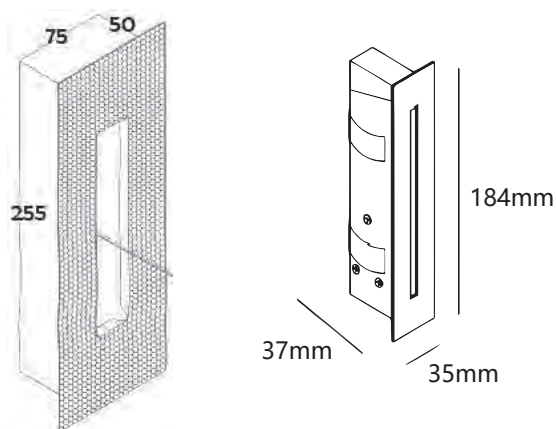

PRODUCT FEATURES


Aluminium wall fitting
Orientation setting
Application: Indoor lighting

Included components
LED module
LED driver
Mounting kit (255x75x50mm)

Available in:
White (Beam 0350W)
Black (Beam 0350B)


TECHNICAL DATA

Code	Beam 0350W/0350B
LxWxH	35x37x184mm
Class	LED
Richtbaar	No
Dimmable	No
Power	3W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	20

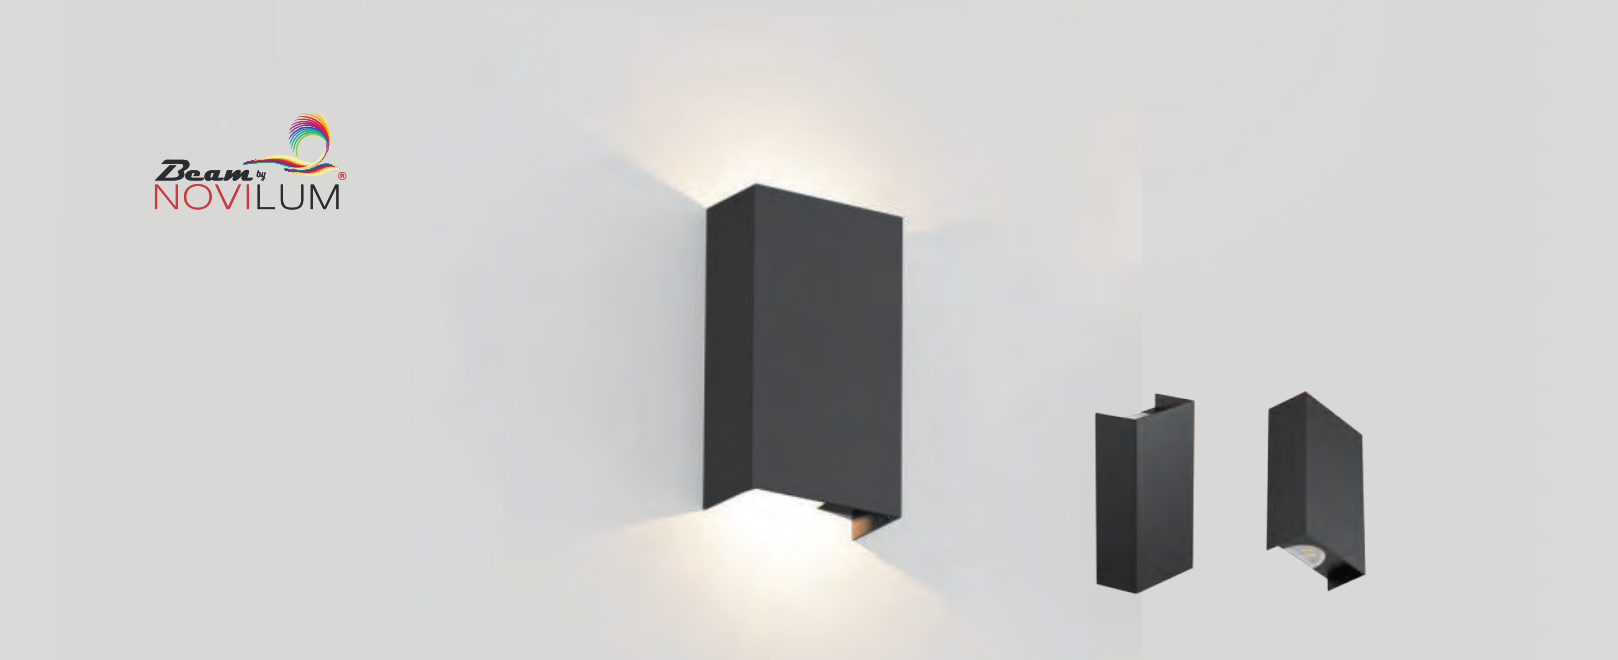

BEAM 0036W/0036B

DECORATIVE LIGHTING
LED WALL LIGHT INDOOR

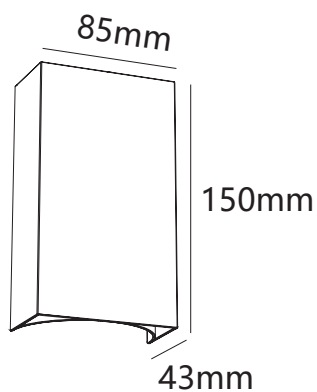

CCT dip switch changeable




2700K 3000K 4000K

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0036W	White	10W	1200Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	85x43x150mm
Beam 0036B	Black	10W	1200Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	85x43x150mm



BEAM 0035W/0035B

DECORATIVE LIGHTING
LED WALL LIGHT INDOOR

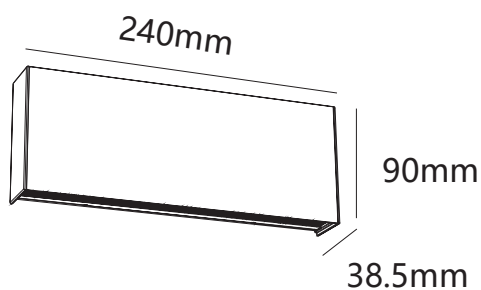

CCT dip switch changeable



2700K 3000K 4000K

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0035W	White	10W	1200Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	240x90x38.5mm
Beam 0035B	Black	10W	1200Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	240x90x38.5mm



BEAM 0037W/0037B/0037G

DECORATIVE LIGHTING
LED WALL LIGHT INDOOR

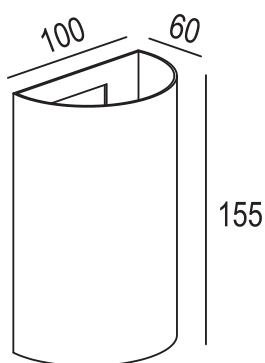

IP20

AC
220-240V

GU10

RoHS

CE

2 years
warranty



PRODUCT FEATURES

Aluminium rectangular wall fitting
Application: Indoor lighting
Excluding GU10 LED

VERSIONS

Beam 0037W White
Beam 0037B Black
Beam 0037G Gold




TECHNICAL DATA

Code	Beam 0037W/0037B/0037G
L×W×H	100x60x155mm
Type	LED
Adjustable	No
Dimmable	Depends on type GU10
Power	Max. 2x10W
Voltage	220-240V 50-60Hz
Fitting	2xGU10
IP	20



BEAM 0038W/0038B/0038G

DECORATIVE LIGHTING
LED WALL LIGHT INDOOR

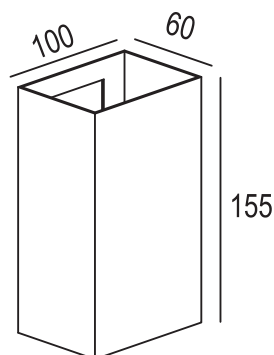

PRODUCT FEATURES


Aluminium rectangular wall fitting
Application: Indoor lighting
Excluding GU10 LED

VERSIONS

Beam 0038W White
Beam 0038B Black
Beam 0038G Gold




TECHNICAL DATA

Code	Beam 0038W/0038B/0038G
L×W×H	100x60x155mm
Type	LED
Adjustable	No
Dimmable	Depends on type GU10
Power	Max. 2x10W
Voltage	220-240V 50-60Hz
Fitting	2xGU10
IP	20

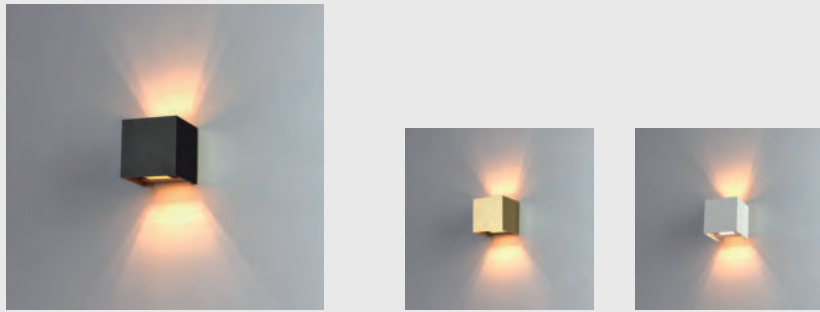

BEAM 0034W/0034B/0034G

DECORATIVE LIGHTING
LED WALL LIGHT INDOOR

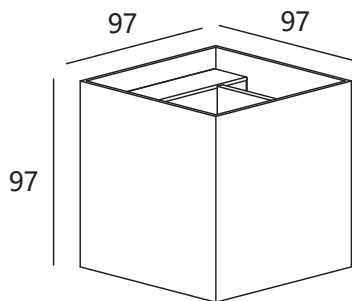

PRODUCT FEATURES

Aluminium square wall fitting
Application: Indoor lighting
Excluding GU9 LED

VERSIONS

Beam 0034W White
Beam 0034B Black
Beam 0034G Gold


TECHNICAL DATA

Code	Beam 0034W/0034B/0034G
L×W×H	97x97x97mm
Type	LED
Adjustable	Yes
Dimmable	Depends on type G9
Power	Max. 1x10W
Voltage	220-240V 50-60Hz
Fitting	1xG9
IP	20



BEAM 6008W/6008B

DECORATIVE LIGHTING
LED MIRROR LIGHT BATHROOM

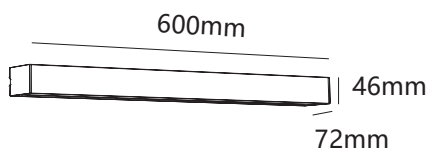

CCT dip switch changable



2700K 3000K 4000K

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 6008W	White	12W	1600Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	600x46x72mm
Beam 6008B	Black	12W	1600Lm	>80	TRIAC	3CCT (2700K-3000K-4000K)	600x46x72mm



BEAM 0552W

DECORATIVE LIGHTING
LED MIRROR LIGHT BATHROOM

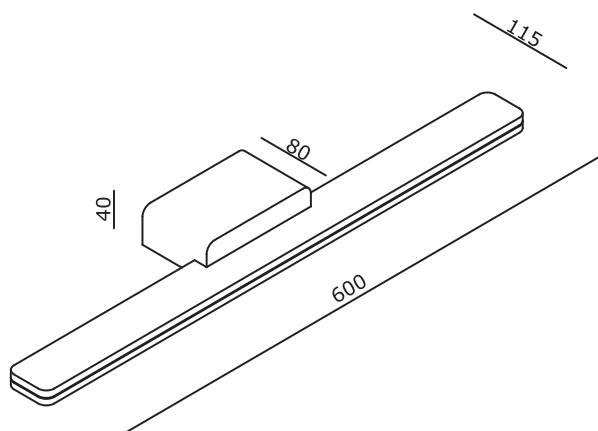


TECHNICAL DATA

Code	Beam 0552W
Kleur toestel	White
L×W×H	600x115x40mm
Type	LED
Adjustable	No
Dimmable	No
Power	16,2W
Voltage	220-240V 50-60Hz
CCT	3000K
IP	54

PRODUCT FEATURES

- o Aluminium wall fitting
- o Mirror lamp
- o Application: Indoor lighting
- o Suitable for damp locations
- o Included
 - LED module
 - LED driver
- o Optional (excluded):
 - Mounting bracket for cabinet installation
 - Beam 0552.1W
 - L×W×H: 130x60x30

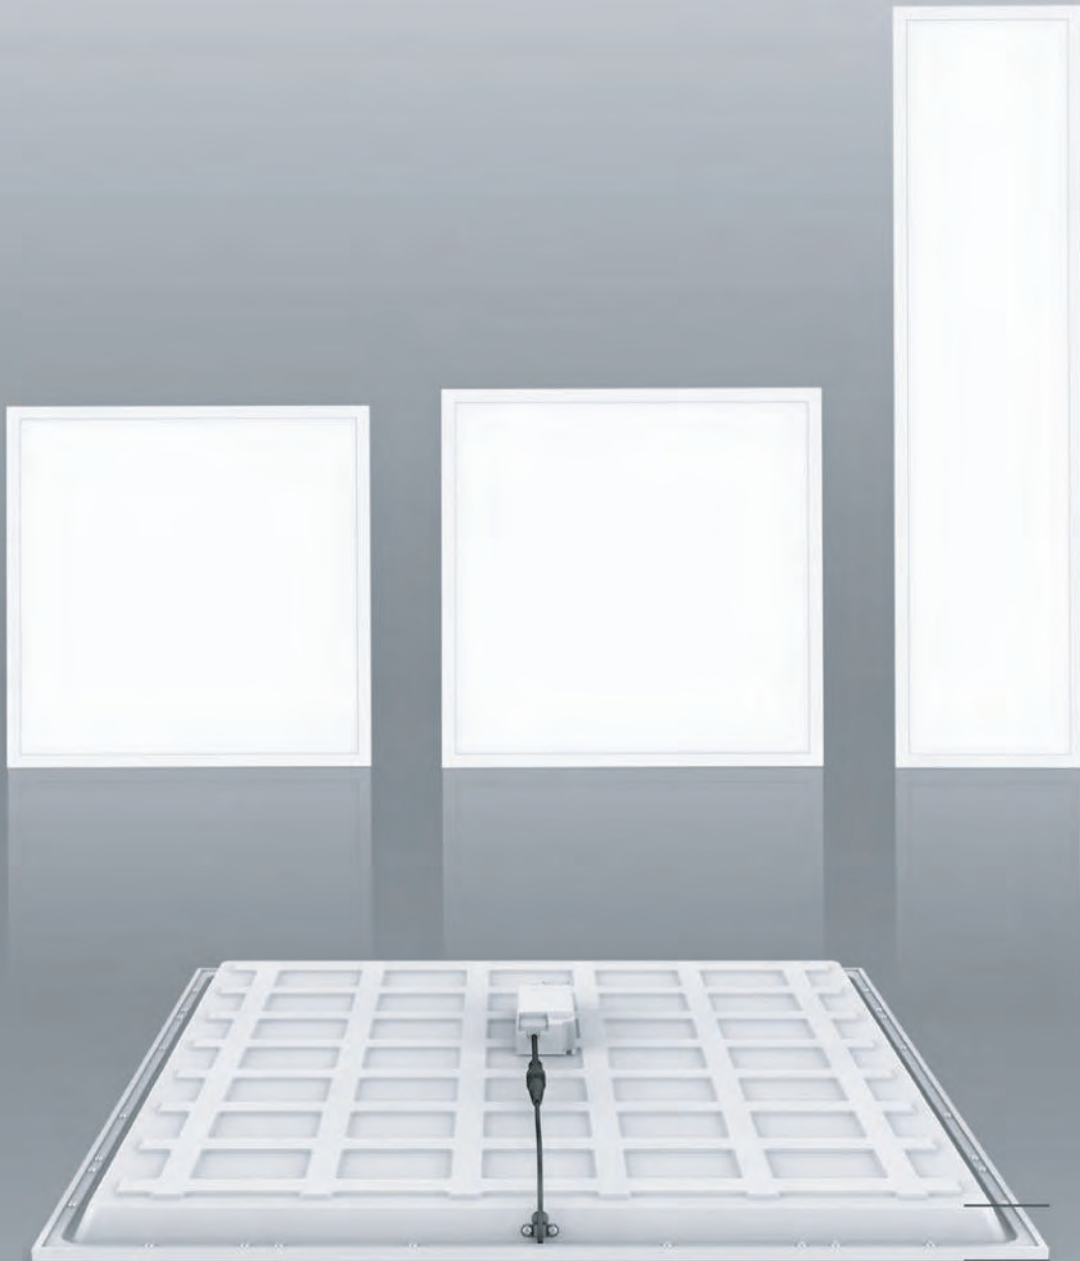


SUPER SLIM BACKLIT PANEL



Backlit panel light

BEAM 0204/0205

INDUSTRIAL LIGHTING
LED PANEL LIGHT



This series is slim design backlit panel just 30mm thickness. It makes full use of all light and is more cost effective compared with side lighting LED panel light. It is adopted high lumen 2835 SMD light source, the optical lens provides a uniform light output.

Materials of Housing : Aluminium, SPCC
Materials of Optics : PMMA(Lens)+PS(Diffuser)



Code	Watt	Lumen(±5%)	Color temp	Size (AxBxC)
BEAM 0204	20-40W	140-145lm/W UGR < 19	3000K	595x595x30mm
BEAM 0205	20-40W	145-150lm/W UGR < 19	4000K	595x595x30mm



Backlit panel light

BEAM 0206/0207

INDUSTRIAL LIGHTING
LED PANEL LIGHT

This series is slim design backlit panel just 30mm thickness. It makes full use of all light and is more cost effective compared with side lighting LED panel light. It is adopted high lumen 2835 SMD light source, the optical lens provides a uniform light output.

Materials of Housing : Aluminium, SPCC
Materials of Optics : PMMA(Lens)+PS(Diffuser)




Code	Watt	Lumen(±5%)	Color temp	Size (AxBxC)
BEAM 0206	20-40W	140-145lm/W UGR < 19	3000K	1195x295x30mm
BEAM 0207	20-40W	145-150lm/W UGR < 19	4000K	1195x295x30mm





BEAM 0520

INDUSTRIAL LIGHTING
LED PANEL LIGHT

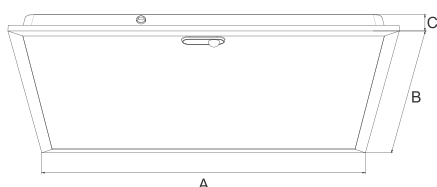

This backlit panel light with PIR sensor and Daylight harvest sensor, can automatically adjust its own lumen output through the sensor. The sensor function can set by remote controller according to the user application.

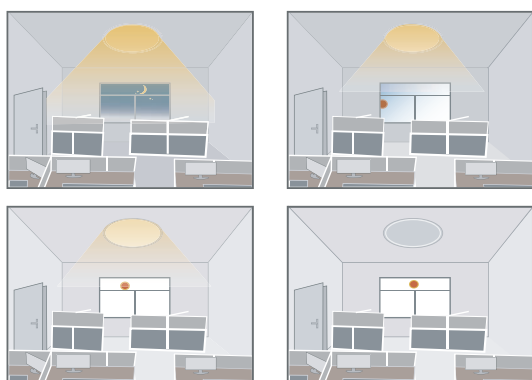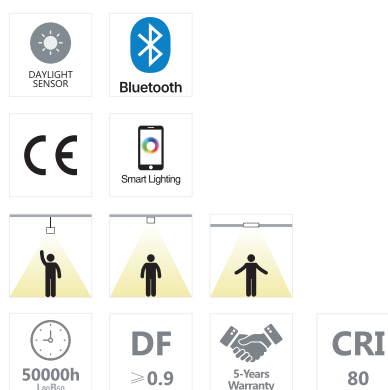

When ambient brightness is lower than preset lux level, sensor will turn on light automatically and keep dimming according to the change of the ambient brightness; when outside is getting darker, the inside will be brighter, and brighter darker. Light OFF when ambient brightness becomes higher than the preset lux level.




Code	Watt	Lumen(±5%)	Color temp	Size(AxBxCmm)
Beam 0520	32W	140lm/W (UGR<19)	4000K	595x595x30




BEAM 3118

INDUSTRIAL LIGHTING
LED PANEL LIGHT

This backlit panel light with PIR sensor and Daylight harvest sensor, can automatically adjust its own lumen output through the sensor. The sensor function can set by remote controller according to the user application.

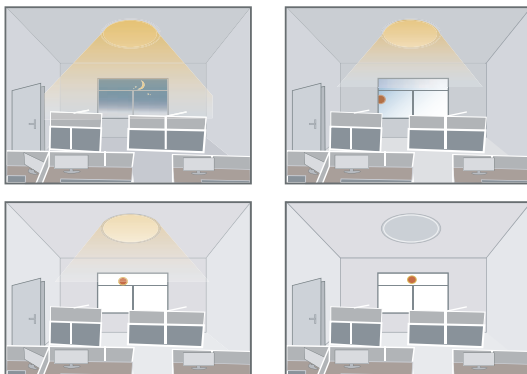

When ambient brightness is lower than preset lux level, sensor will turn on light automatically and keep dimming according to the change of the ambient brightness; when outside is getting darker, the inside will be brighter, and brighter darker. Light OFF when ambient brightness becomes higher than the preset lux level.

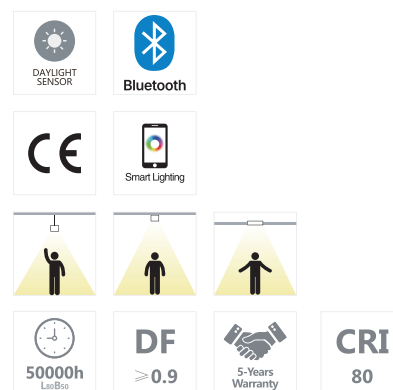

Code	Watt	Lumen(±5%)	Color temp	Size(AxBxCmm)
Beam 3118	32W	140lm/W (UGR<19)	4000K	1195x295x30

SUSPENDING KITS (customized length)

Code Beam 0512-2 (2 pieces/set) or
Beam 0513-2 (4 pieces/set)
for Beam 0204/0205/0206/0207



GYPROC CLAMPS

Code Beam 0510

Packaging Set of 4 pieces
and 8 screws

Dimensions 46 x 29,5 x 18,5 mm



SURFACE MOUNTED FRAME

Code Beam 0208

Beam 0209

Packaging Each piece


Each piece

for Beam 0204/0205

for Beam 0206/0207

Dimensions 602x602x65mm





1202x302x65mm





BEAM 3098/3099/3100

INDUSTRIAL LIGHTING
LED PANEL LIGHT



- 20-60w for options.
- 5 years warranty.
- Low glare UGR<19/22.
- Stable and durable.
- Bright and uniform light.
- Small size, high strength.
- No radiation, no flicker phenomenon.



► CCT Changing 3000K 4000K 5000K 6000K

► Function



► IP



► Electrical Parameters




► Photometric Parameters



► Light distribution



► Installation method



Hanging installation





Ceiling installation

Code	Power	Lumen	LEDS	CCT	Beam Angle	Size(mm)	Net Weight
Beam 3098	30W	4200LM	2835	3000/4000/5000/6000K	120°	L600x200x65	1.08KG
Beam 3099	60W	8400LM	2835	3000/4000/5000/6000K	120°	L1200x200x65	1.50KG
Beam 3100	80W	11200LM	2835	3000/4000/5000/6000K	120°	L1500x200x65	2.80KG



BEAM 0490C

INDUSTRIAL LIGHTING
LED PANEL LIGHT

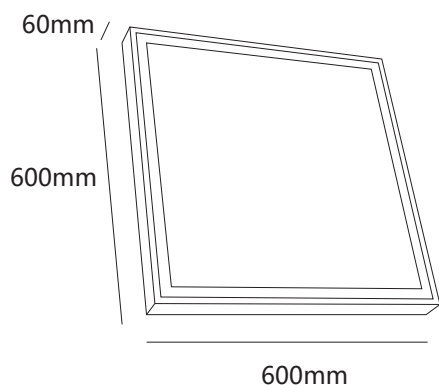

PRODUCT FEATURES

Opaque plexiglass
Fixed LED square
Incl. Triac dimmable driver

Code	CCT	Lumen
Beam 0490C/3000K	3000K	4322Lm
Beam 0490C/4000K	4000K	4550Lm



TECHNICAL DATA

Code	Beam 0490C
Device Color	White
L×W×H	600x600x60mm
Class	LED
Adjustable	No
Dimmable	Yes (DALI Option)
Power	39W
Voltage	220-240 50-60Hz
CCT	3000K or 4000K
CRI	>80
Lumen	4322Lm (3000K) 4550Lm (4000K)
IP	20



BEAM 0493C

INDUSTRIAL LIGHTING
LED PANEL LIGHT

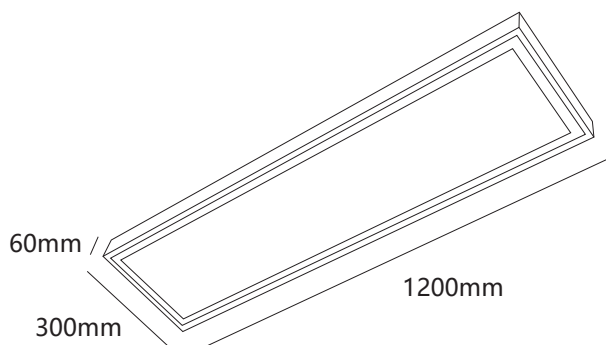


PRODUCT FEATURES

Opaque plexiglass
Fixed LED square
Incl. Triac dimmable driver

Code	CCT	Lumen
Beam 0493C/3000K	3000K	4322Lm
Beam 0493C/4000K	4000K	4550Lm

TECHNICAL DATA

Code	Beam 0493C
Device Color	White
L×W×H	1200x300x60mm
Class	LED
Adjustable	No
Dimmable	Yes (DALI Option)
Power	39W
Voltage	220-240 50-60Hz
CCT	3000K of 4000K
CRI	> 80
Lumen	4322Lm (3000K) 4550Lm (4000K)
IP	20

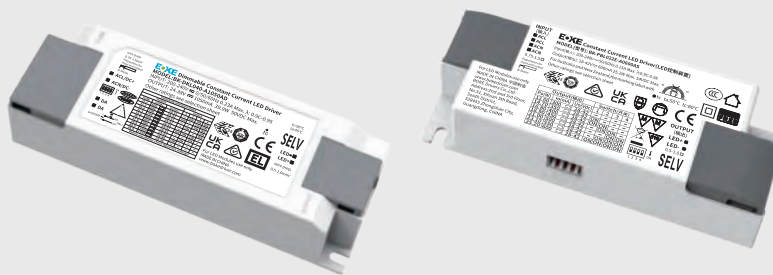


BEAM 0615 to 0626

INDUSTRIAL LIGHTING
LED DRIVERS

PRODUCT FEATURES

Code	Beam 0615 to 0626
Manufacturer	LIFUD/BOKE
Voltage	220-240V 50/60Hz
IP	20
PF	0,9





TECHNICAL DATA

Code	Power	Current	Output Voltage	Dimensions	Dimmable
Beam 0623	18W	450mA	25-42Vdc	115x42x28mm	No
Beam 0615	28W	700mA	25-42Vdc	115x42x28mm	No
Beam 0616	36W	900mA	25-42Vdc	115x42x28mm	No
Beam 0617	42W	1050mA	25-42Vdc	115x42x28mm	No
Beam 0618	52W	1300mA	25-42Vdc	140x43x30mm	No
Beam 0626	12-24W	300mA-600mA	28-42Vdc	123x46x30mm	No
Beam 0624	20-40W	500mA-1000mA	28-42Vdc	123x46x30mm	No
Beam 0625	12-40W	300mA-1050mA	9-42Vdc	123x46x30mm	TRIAC
Beam 0619	22-40W	550mA-1050mA	25-42Vdc	107x70x30mm	DALI
Beam 0620	40,5-60W	750mA-1500mA	25-42Vdc	160x49x28mm	DALI




BEAM 0030W/0030B BEAM 0031W/0031B

INDUSTRIAL OFFICE LIGHTING
LED LINEAR LIGHT OFFICE

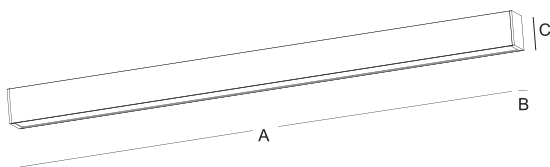

This led linear light use PC diffuser and Aluminum house, removable back plate. Fast linkable without screws, support rolling PCdiffuser to achieve most labor saving . Many differet linkable solutions depend on customized design. It's an optimal choice.



Beam 0050

Surface mounted option, including 2pcs and screws



Beam 0051

Suspension accessories



Beam 0052

Suspension round box with 1.5m cable



Beam 0032

Rolling opal diffuser
Beam angle: 110.7°
Up to 130Lm/W



Beam 0033


Fast connector:
- fast connection
- without screws
- labor-saving



- **Most Labor-saving**
- **Linkable Fast Connect**
- **Without Screws**

INDUSTRIAL OFFICE LIGHTING
LED LINEAR LIGHT OFFICE

Without LED

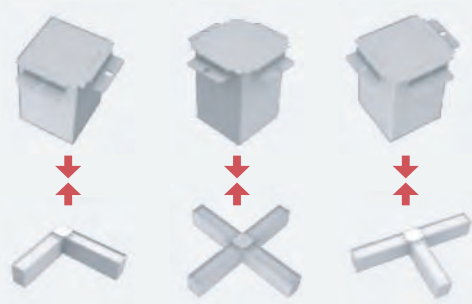

With LED



Code	Color	Power(W)	Lumen efficiency (lm/w±10%)	CCT	Size (AxBxC)
Beam 0030W	White	30	130	3000/3500/4000K	1147x50x73mm
Beam 0030B	Black	30	130	3000/3500/4000K	1147x50x73mm
Beam 0031W	White	38	130	3000/3500/4000K	1432x50x73mm
Beam 0031B	Black	38	130	3000/3500/4000K	1432x50x73mm

170lm/w high efficiency

CCT adjustable & Power adjustable

Magnetic bracket easy installation





BEAM 0704

INDUSTRIAL LIGHTING LED TUBES AND BATTEN

This is an upgrade solution for fluorescent tube fixture, which is a luminaire in luminaires with independent EU certification, also recyclable use of the old housing and no risk of failure on old components. CCT and power adjustable for flexible requirement, Keeping classic design and no need to redecorate or refurbish the ceiling and walls.



CCT dip switch changeable



Code	Size	Wattage (power adjustable)	Efficiency	CRI	CCT	SDCM
Beam 0704-529mm	529mm	9/12W	170lm/W	>80	3000K/4000K adjustable	3
Beam 0704-1129mm	1129mm	18/24W	170lm/W	>80	3000K/4000K adjustable	3
Beam 0704-1429mm	1429mm	24/30W	170lm/W	>80	3000K/4000K adjustable	3

Input: AC220~240V 50/60Hz



Operation Temp: -20~40°C

Flicker: Flicker free available

Material: Extruded polycarbonate with UV protection

Installation: Surface mounting



Protection: IP20 | IK06

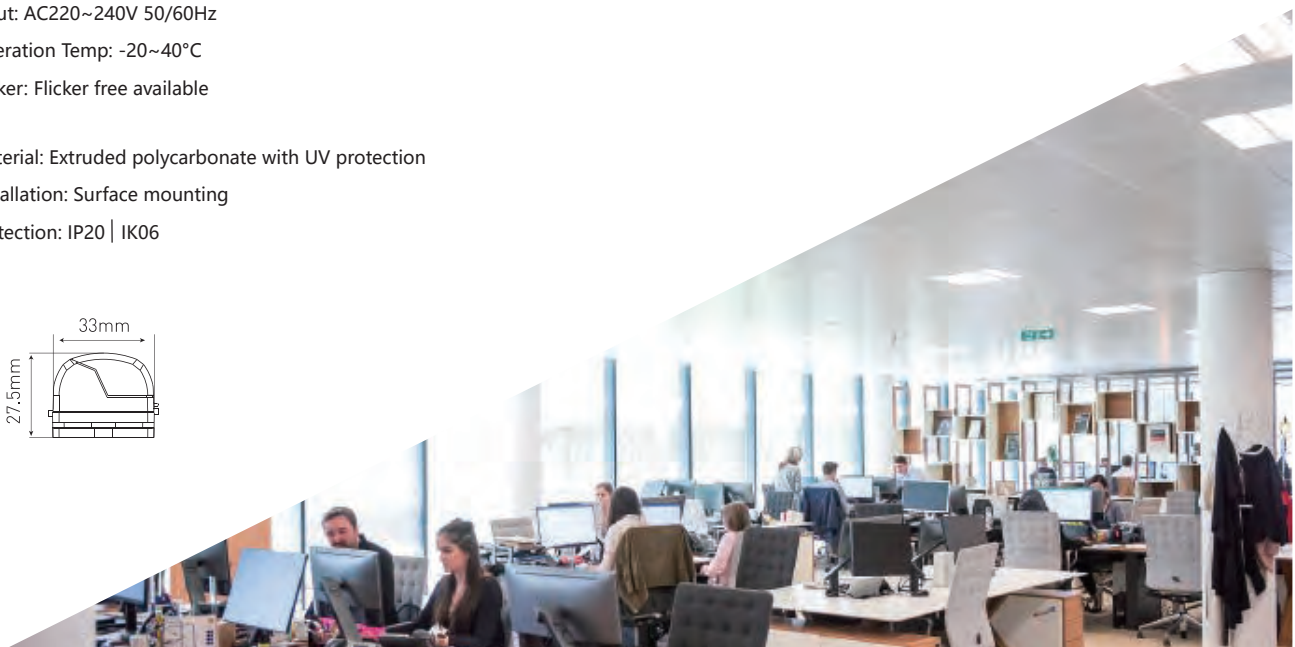



BEAM 3047/3048/3049

INDUSTRIAL LIGHTING
LED TUBES AND BATTEN

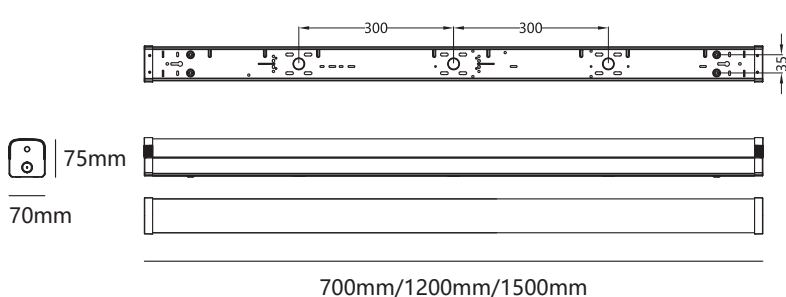

CCT dip switch changeable




Advantages

Quick and fast installation
High Efficiency
CCT selectable

Power selectable
Sensor optional
Emergency optional

Materials of Housing: Steel
Materials of Optics: PC

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3047	White	20W	130Lm/W	>80	No	3CCT (3000K-4000K-5700K)	700x70x75mm
Beam 3048	White	40W	130Lm/W	>80	No	3CCT (3000K-4000K-5700K)	1200x70x75mm
Beam 3049	White	60W	130Lm/W	>80	No	3CCT (3000K-4000K-5700K)	1500x70x75mm

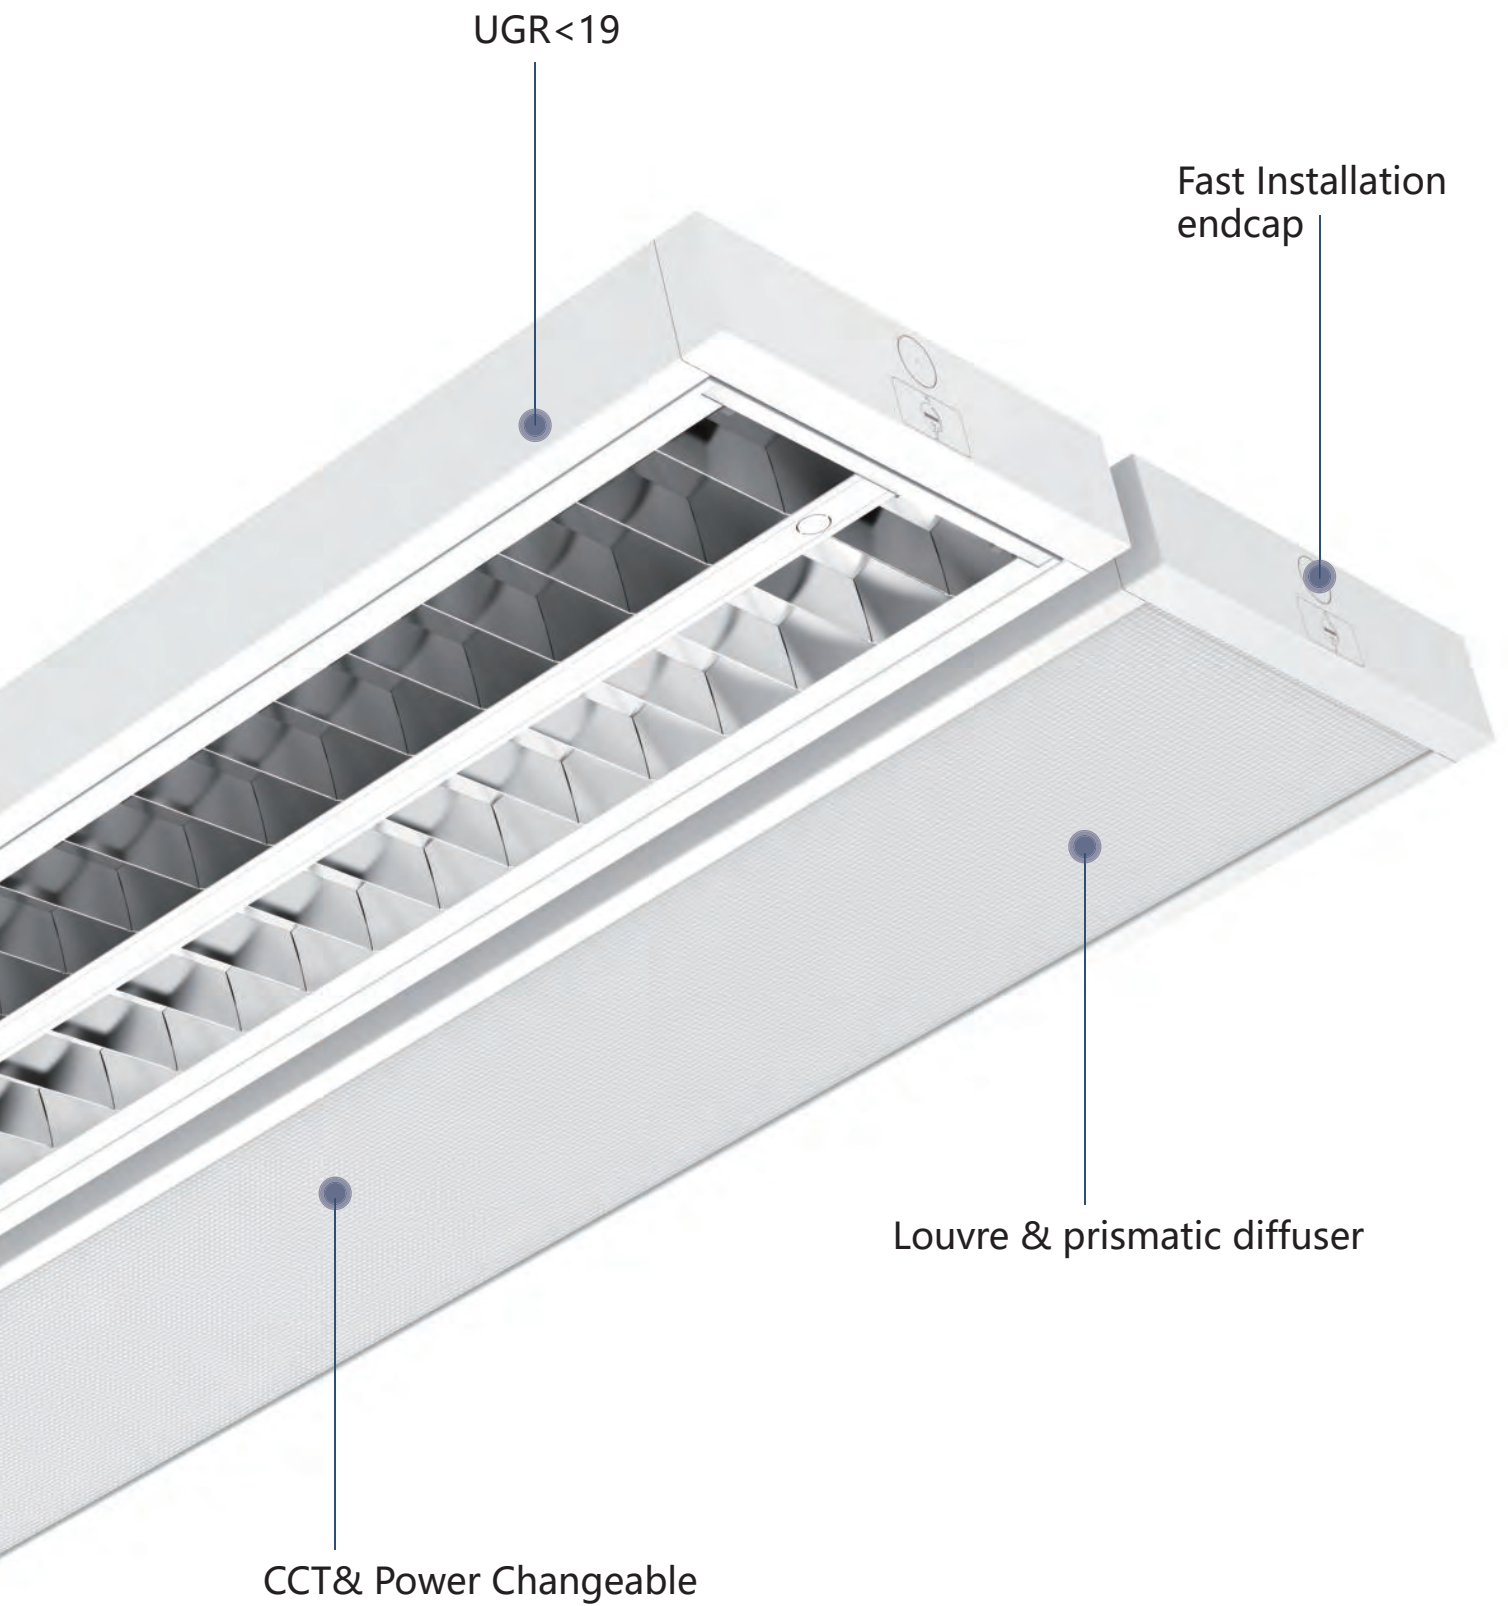



BEAM S3050

INDUSTRIAL LIGHTING LED TUBES AND BATTEN

This is an easy, efficient family of luminaires displaying classic style. The luminaire housing is supplied in white painted steel with smart locking spring end caps. Prismatic diffuser and louvre cover 2 different optics that makes it suitable in a lot of applications with very good UGR control, UGR19 at the same time. Surface mounted or suspended installation both available. Smart control sensor with PIR and BT grouping function is very friendly and energy saving.



S This product is a special order item
(delivery time of at least 12 weeks)

Code	Size	Wattage (power adjustable)	Lumen	Efficiency	CRI	CCT	SDCM	UGR
Beam S3050-1200	1200mm(Louvre)	20/25/30/35W	2600/3250/3900/4550LM	130lm/w	80	4000K	3	19
Beam S3050-1500	1500mm(Louvre)	30/35/40/50W	3900/4550/5200/6500LM	130lm/w	80	4000K	3	19
Beam S3050-1200-P	1200mm(Prismatic)	20/25/30/35W	2500/3125/3750/4375LM	125lm/w	80	4000K	3	19
Beam S3050-1500-P	1500mm(Prismatic)	30/35/40/50W	3750/4375/5000/6250LM	125lm/w	80	4000K	3	19

Input: AC220~240V 50/60Hz

Wiring: 3 wires through

Operation Temp:-20~40°C

Flicker: Flicker free



Material: White coating sheet metal+Extrusion transparent PMMA cover


Installation: Surface mounted; Cable wire; Wire suspension; Wall mounted


Protection: IP20/IK06

Terminal: 3x2.5mm² push-in terminal

Connection: One cable entry at the endcap and
two top entries at the back of the luminaire

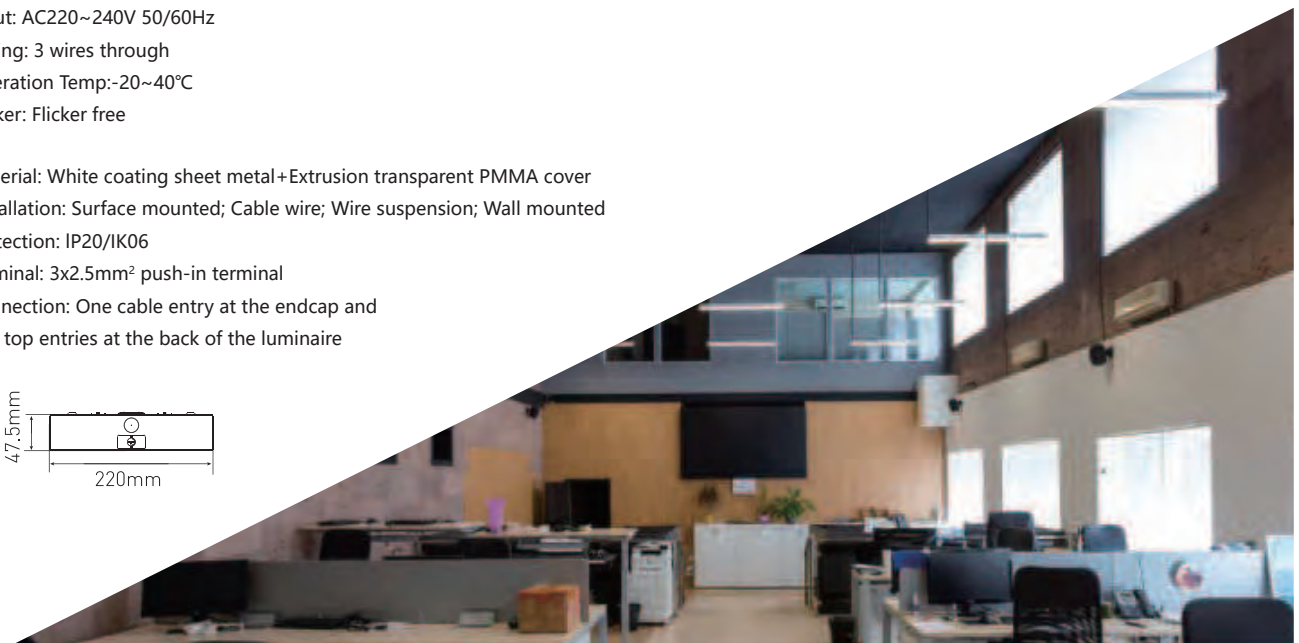

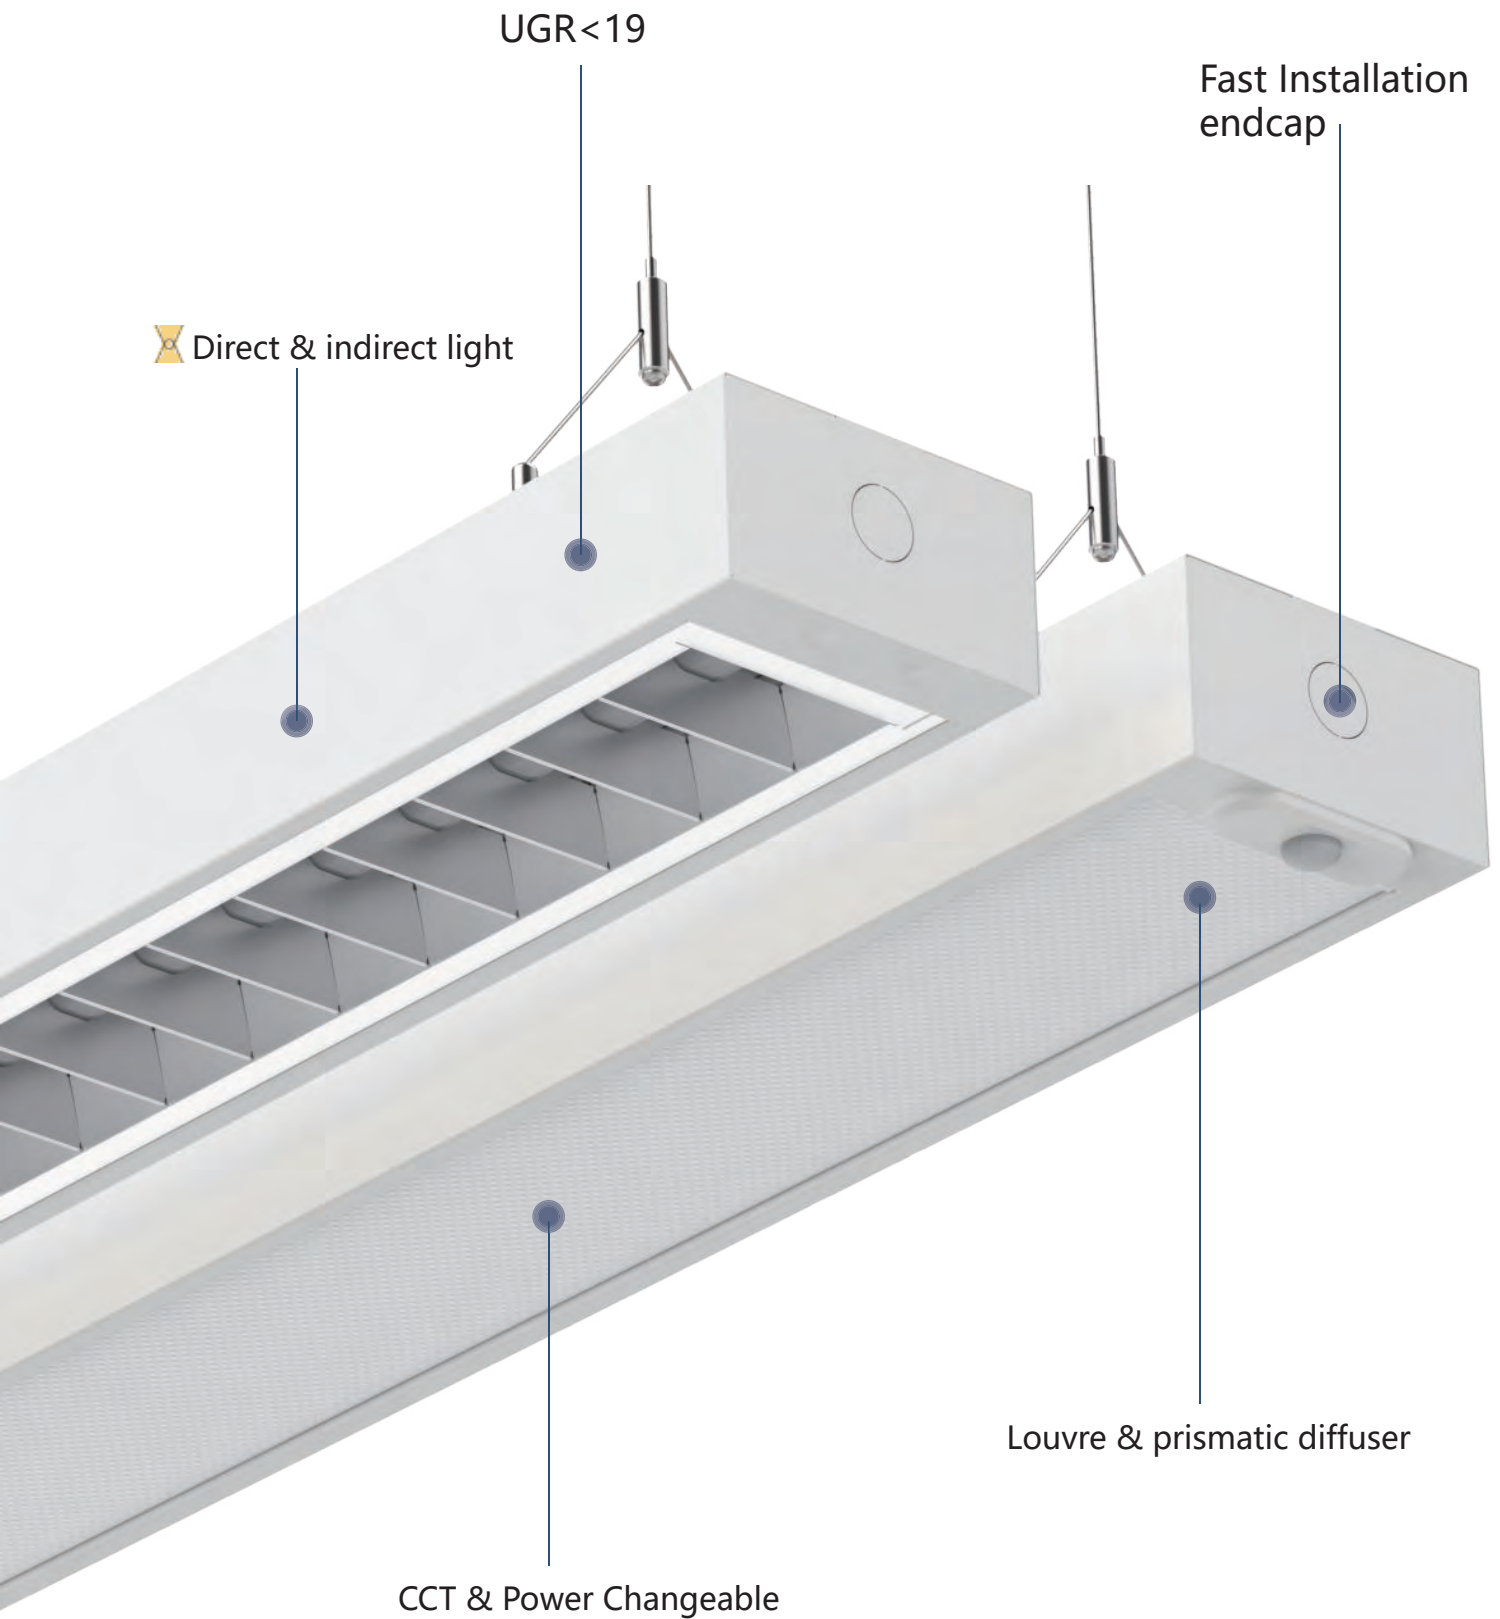

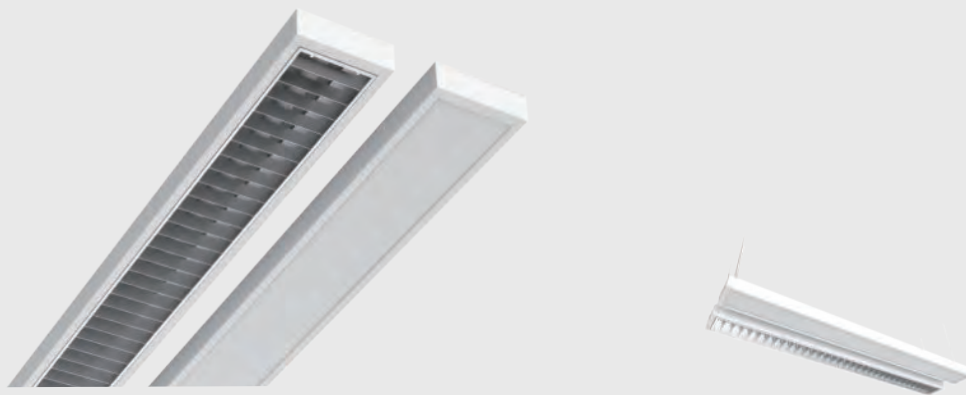

BEAM S3051

INDUSTRIAL LIGHTING LED TUBES AND BATTEN

This is a slim design office lighting. The luminaire housing is supplied in white painted steel with smart locking spring end caps. Prismatic diffuser and louvre cover 2 different optics that makes it suitable in a lot of applications with very good UGR control, UGR19 at the same time. Surface mounted or suspended installation both available. Smart control sensor with PIR and BT grouping function is very friendly and energy saving.

UGR<19

CE

IP20

IK06

 This product is a special order item
(delivery time of at least 12 weeks)

Code	Size	Wattage	Lumen	Efficiency	CRI	CCT	SDCM	UGR
Beam S3051-1300	1300x100x50mm[Louvre]	27W	3500LM	130lm/w	80	4000K	3	19
Beam S3051-1500	1500x100x50mm[Louvre]	35W	4500LM	130lm/w	80	4000K	3	19
Beam S3051-1300-P	1300x100x50mm[Prismatic]	20W	2500LM	125lm/w	80	4000K	3	19
Beam S3051-1500-P	1500x100x50mm[Prismatic]	28W	3500LM	125lm/w	80	4000K	3	19

Input: AC220~240V 50/60Hz

Wiring: 3 wires through

OperationTemp:-20~40°C

Flicker: Flicker free

Material: White coating sheet metal+Extrusion transparent PMMA cover


Installation: Surface mounted; Cable wire; Wire suspension; Wall mounted


Protection: IP20/IK06

Terminal: 3x2.5mm² push-in terminal

Connection: One cable entry at the endcap and

two top entries at the back of the luminaire



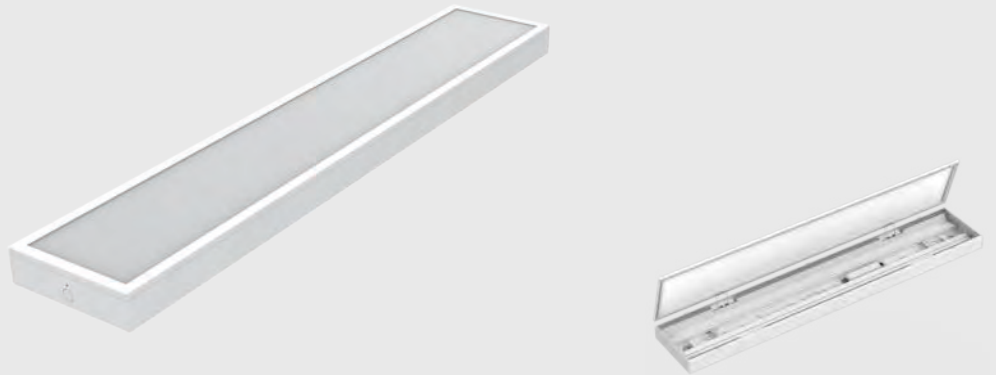

BEAM S3052

INDUSTRIAL LIGHTING LED TUBES AND BATTEN

This linear fixture has an elegant rectangle design, prismatic diffuser optics with comfortable light distribution and UGR19. Easy open cover makes the product easy to install and easy to wire. Modularity and sustainability makes the product more flexible. Power and CCT are adjustable. It's an ideal solution for schools, offices, corridors and more.

UGR<19



 This product is a special order item
(delivery time of at least 12 weeks)

Code	Size	Wattage (power adjustable)	Lumen	Efficiency	CRI	CCT	SDCM
Beam S3052-1245	1245x325x60mm	31/35/39/43W	3720/4200/4680/5160LM	120lm/w	80	3000/4000/5000K	3
Beam S3052-1525	1525x325x60mm	42/46/50/54W	5040/5520/6000/6480LM	120lm/w	80	3000/4000/5000K	3

Input: AC220-240V 50/60Hz

Wiring: 3 wires through

OperationTemp:-20~40°C

Flicker: Flicker free


Material: White coating sheet metal+Extrusion transparent PMMA cover

Installation: Surface mounted; Cable wire; Wire suspension; Wall mounted

Protection: IP20/IK03

Terminal: 3x2.5mm² push-in terminal


Connection: One cable entry at the endcap and
two top entries at the back of the luminaire



INDOOR SPORT LIGHTING SIGMA



Robust ball-proof
structure
DIN18032-3

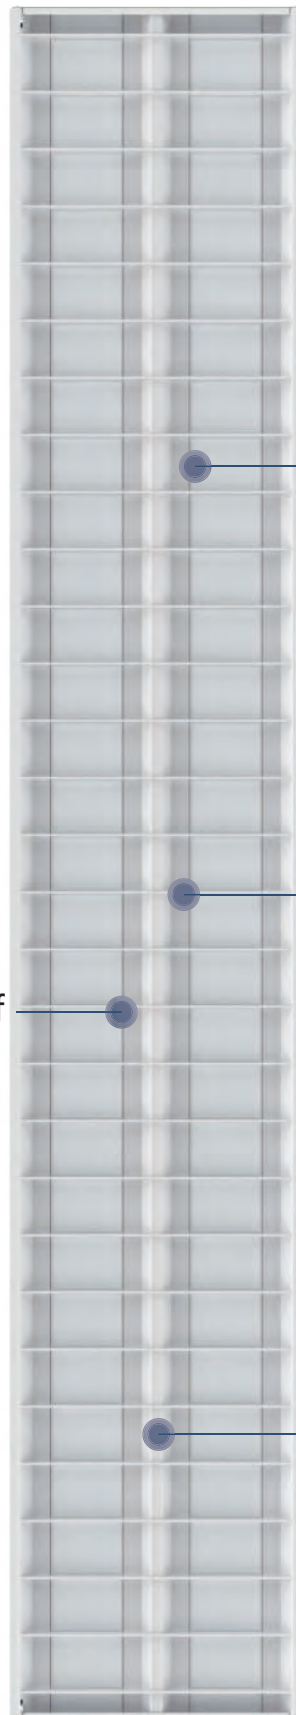

Low Glare
UGR<22

LED module & driver
Changeable

Slim Design



INDOOR SPORTS LUMINAIRE-SIGMA

SIGMA indoor sports hall luminaire is a modern design with a perfect slim structure, which is more competitive on weight, installation and power consumption. It also has a low glare optic and ball proof certification which is perfect for new indoor sports hall buildings.


Code	Size	Wattage	Lumen	Efficiency	CRI	CCT	SDCM	UGR
Beam S3000	1530x148x65mm	60W	9000LM	150lm/w	80	4000K	3	<20.8
Beam S3001	1530x148x65mm	80W	12000LM	150lm/w	80	4000K	3	<21.8
Beam S3002	1530x274x71mm	100W	15000LM	150lm/w	80	4000K	3	<20.3
Beam S3003	1530x274x71mm	150W	22500LM	150lm/w	80	4000K	3	<21.7

Accessories:

Beam S3115	Wall mounting set
Beam S3116	Suspension kit
Beam S3117	Installation brackets (adjustable)

Input: AC220~240V/DC230V 50/60Hz
Wiring: 3 wires through optional
Operation Temp:-20~40°C
Flicker: Flicker free
Design: LED module & driver changeable

Material: Sheet metal+PMMA | White coating
Installation: Ceiling mounted | Suspension
Protection: Ball impact resistance
Terminal: 5x1.5mm² | 5x2.5mm² push
3x1.5mm² | 3x2.5mm² push





- 1 Mounting kits
- 2 Double click bracket
- 3 Luminaire with various optics
- 4 Connecting board
- 5 Plug for electrical contact to main power
- 6 Pre wired 2.5mm² cable with VDE approved

BEAM LINE

LED Trunking System


BEAM LINE is an efficient, flexible and versatile linear light system providing lighting solution for various applications of industrial, commercial, office etc. It provides many lighting options with various luminaire elements, optics, functional modules to meet different lighting requirements. It saves time and cost due to its extremely easy and toolless installation and maintainance design.



180Lm/W - HIGH LUMEN OUTPUT

BEAM LINE allows you to use less luminaires to meet your lux requirement. Investment will be paid off in shorter time.

BEAM LINE provides high colour rendering. Index > Ra 80.

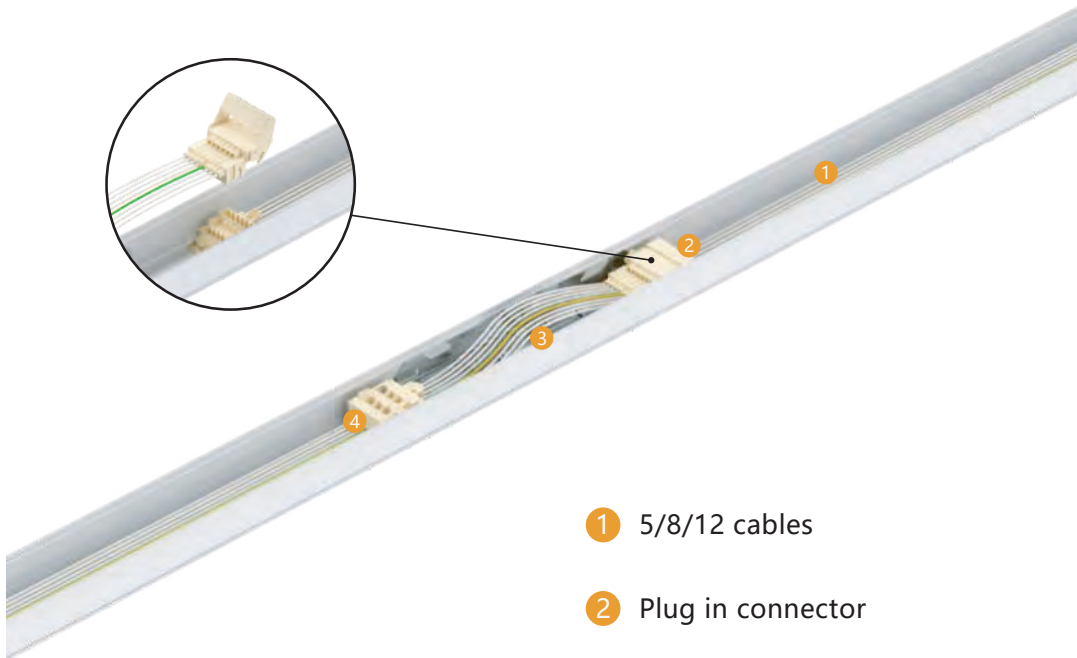


- ① 5/8/12 cables
- ② Plug in connector
- ③ Lockable connection design
- ④ Socket connecting to the plug on module

BEAM LINE

LED Trunking System

INNOVATIVE OPTICS DESIGN FOR LOWEST LIGHT
LOSS AND OPTIMUM EFFICIENCY.

Beam angle

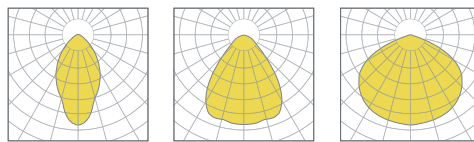

60°

90°

120°



Die cast module long lens design
more reliable optical control.



MORE ENERGY EFFICIENT, INNOVATIVE DIP SWITCH DESIGN INTEGRATED

New generation luminaire for BEAM LINE trunking system improved with higher lumen efficiency. 8 different power from 29-76W selectable thanks to the dip switch design.

P1	Irated	1	2	3
76W	550mA	ON	ON	ON
71W	500mA	-	ON	ON
63W	450mA	ON	-	ON
57W	400mA	-	-	ON
50W	350mA	ON	ON	-
43W	300mA	-	ON	-
36W	250mA	ON	-	-
29W	200mA	-	-	-

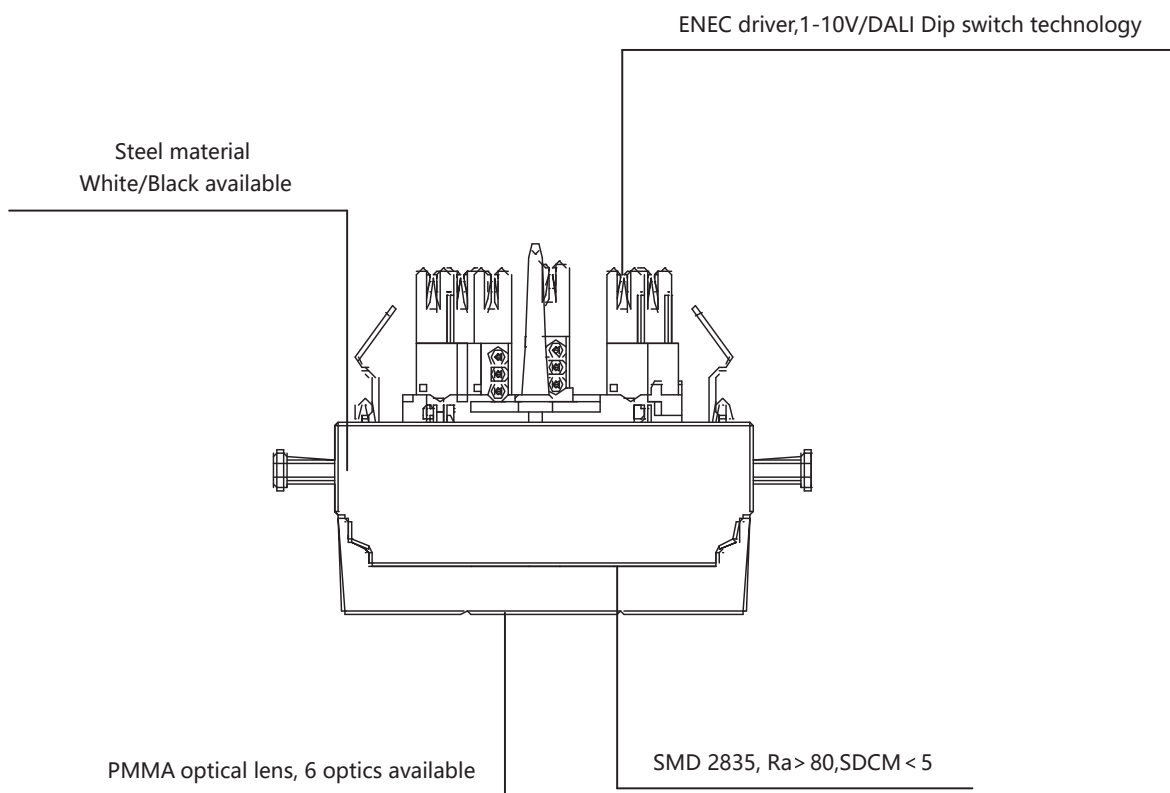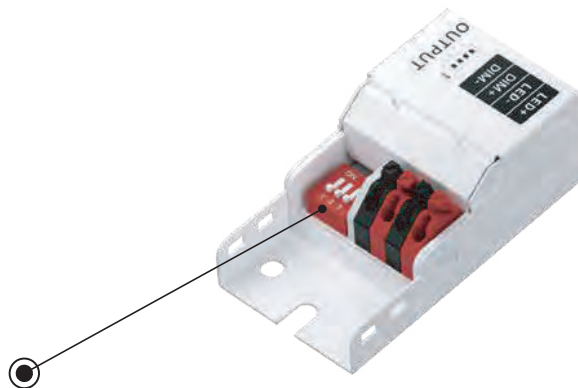



Track module

Model No: **Beam S3058**

Length: 1472mm

With 700mm ENEC approved

Track for 1472mm trunk



Sensor module

Model No: **Beam S3059**

Length: 1472mm

Detect distance: 10M Detected

angle: 120° Need 8 wires trunk

Extra functional modules like track module, blank cover module, emergency module, socket module perfectly integrated into BEAM LINE system.



Emergency module

Model No: **Beam S3071 SE**

Length: 1472mm

Automatic Battery Status Detect 3h

Emergency Time @ 10w Li-battery Inside



Emergency light module

Model No: **Beam S3060**


Length: 1472mm

Trunking Rail

4 cables E1+,E1-,E2+,E2- for 2 central battery system circuit

CHR

5 cables L1, L2,L3,N,G, for power supply

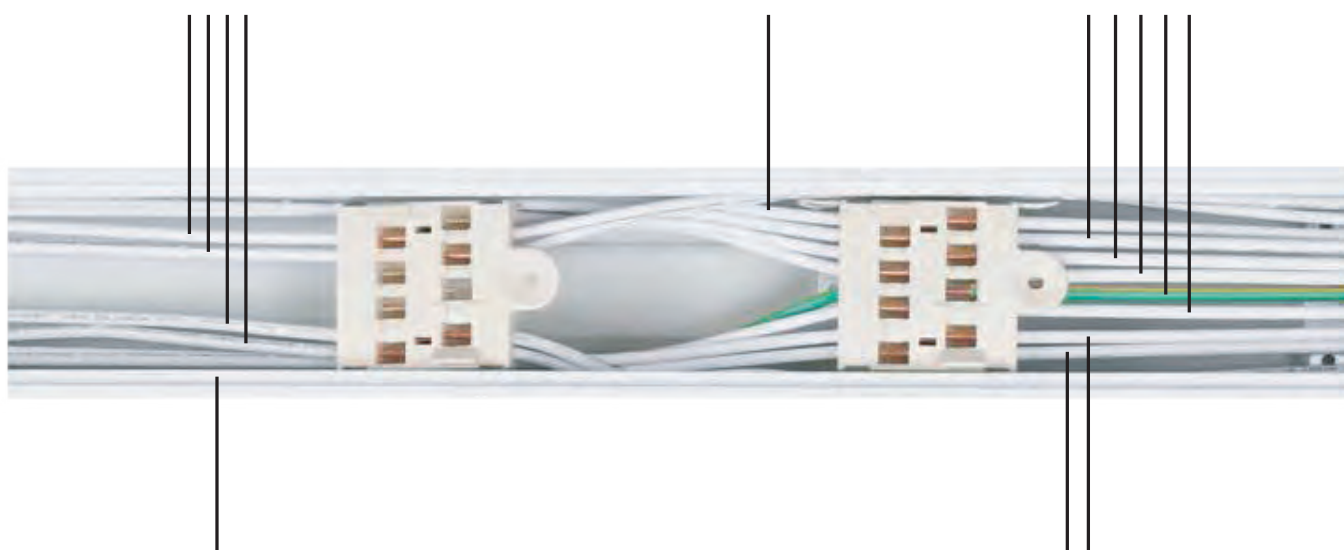

White and black finish available

2 dimming cables DIM+,DIM- for 1-10V or DALI control






5-pole




8-pole



12-pole

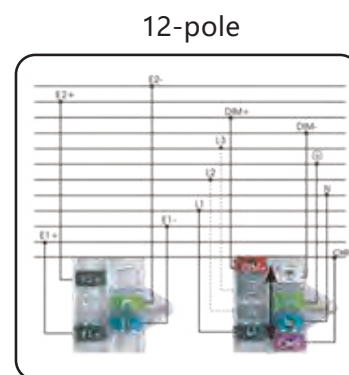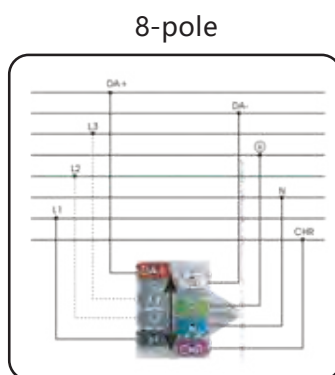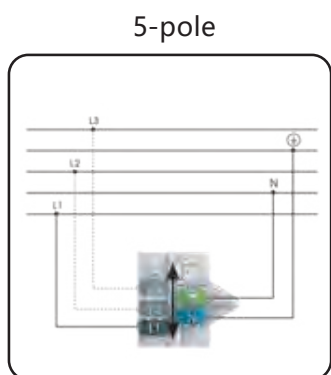

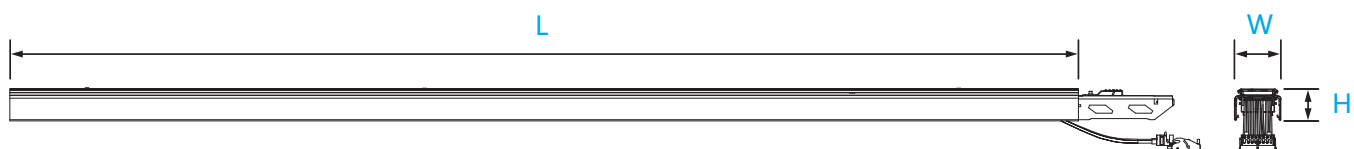

5 Wires

Type	Description	L	W	H
Beam S3061	5 wires	1472	64	43.5
Beam S3062	5 wires	2944	64	43.5

8 Wires



Type	Description	L	W	H
Beam S3064	8 wires	1472	64	43.5
Beam S3065	8 wires	2944	64	43.5

12 Wires


Type	Description	L	W	H
Beam S3067	12 wires	1472	64	43.5
Beam S3068	12 wires	2944	64	43.5




CCT: 4000K
Dimmable: No



Model	Power	Beam angle	LM/W	L	W	H
Beam S3070 /R/D 60	29-76W	60°	180 Lm/W	1472	64	29.5



Model	Power	Beam angle	LM/W	L	W	H
Beam S3070 /R/D 90	29-76W	90°	180 Lm/W	1472	64	29.5



Model	Power	Beam angle	LM/W	L	W	H
Beam S3070 /R/D 120	29-76W	120°	180 Lm/W	1472	64	29.5

 This product is a special order item
(delivery time of at least 12 weeks)

ACCESSORIES



Blank cover, PC type, for 1437mm trunk
Beam S0809



Blank cover, Steel type, for 1437mm trunk
Beam S0810




Chain suspension kit
Beam S0815




Steel cable suspension kit
Beam S0814



Surface mounting kit
Beam S0813

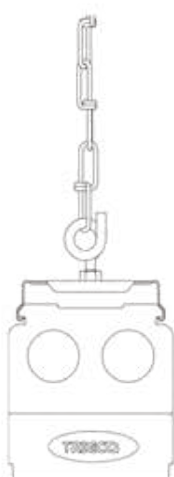

Chain

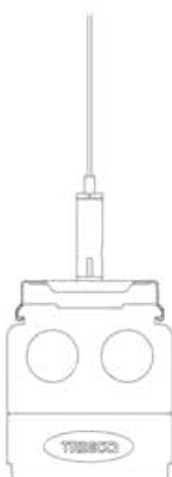

Steel cable




Surface Mounted

ACCESSORIES



End Cap
Model No: [Beam S0817](#)
1 unit required per line

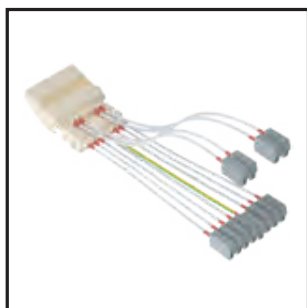

AC input terminal
Model No: [Beam S0819-5](#)
[Beam S0819-8](#)
[Beam S0819-11](#)
1 unit required per line



Insulating cover
Model No: [Beam S0826](#)
1 unit required




Empty end box
Model No: [Beam S0823](#)



AC input box
Model No: [Beam S0818-5](#)
[Beam S0818-8](#)
[Beam S0818-11](#)
[Beam S0818B-5](#)
[Beam S0818B-8](#)
[Beam S0818B-11](#)



Input cable protector
Model No: [Beam S0816](#)

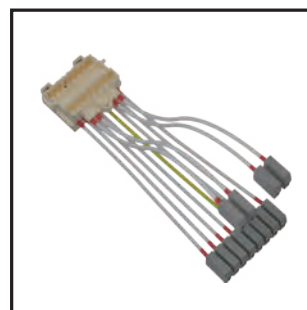


AC output terminal
Model No: [Beam S0825-5](#)
[Beam S0825-8](#)
[Beam S0825-12](#)
1 unit required per line





BEAM 3012/3013/3014/3015/3016

INDUSTRIAL LIGHTING
LED EMERGENCY LIGHT



FEATURES


- IP65 rating, ensuring suitability for industrial areas, warehouses and parking lots.
- Power factor ≥ 0.9 , ensuring efficient power utilization.
- Only four springs required for recessed mounted.




BEAM 3012
(ceiling mounted)



BEAM 3012 ONE LINE
(with 1 led line, ceiling mounted)



BEAM 3014
(PC stickers)

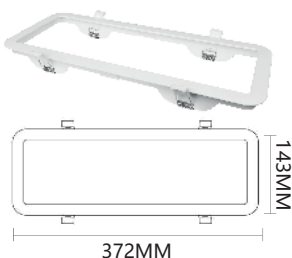

BEAM 3013
(recessed accessory)




BEAM 3015
(PC cover)



BEAM 3016
(PC+PMMA cover)

Code	Input Voltage	Mains/ Emergency Power	Charge/Discharge Duration	Battery	Test Mode
Beam 3012	85-265Vac Emergency unit	210lm 5W/4W Max 150lm 4W	24H/ > 3H	LiFePO4 6.4V 1800mAh	MT
Beam 3013	Recessed accessory				
Beam 3014 A/B/C/D	PC stickers (4 options - see above)				
Beam 3015	PC cover				
Beam 3016	PC + PMMA cover				

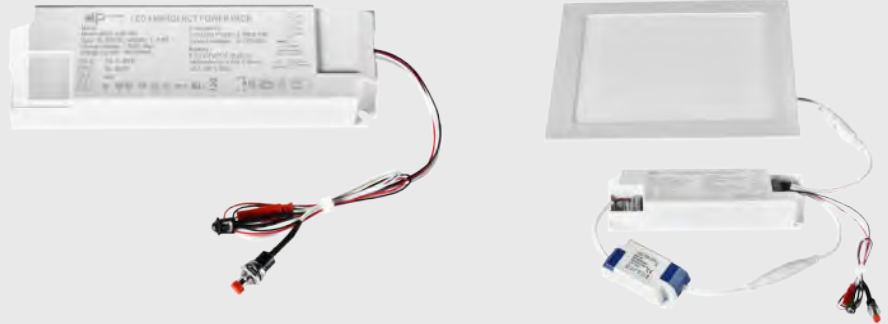


BEAM 3017

INDUSTRIAL LIGHTING
LED EMERGENCY LIGHT




Size:

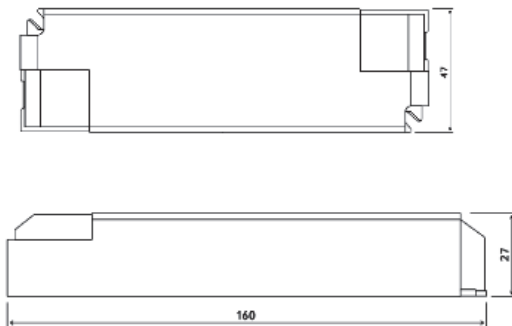

FEATURES

- Widely match 3W to 80W LED lamp with self-contained electronic drivers, such as led panel light, LED high bay light, LED down light, LED flood light, LED ceiling light and tri-proof light.
- High-grade LiFePO4 batteries back up, 3 years guarantee above
- High quality electronic components with self-developing IC control. Our protect circuit board in the battery packs to make safety working when battery charging or discharging.

Wiring Diagram:

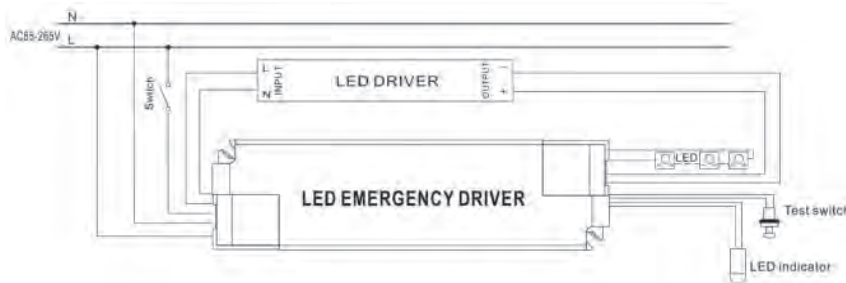

Code	Match LED Source	Emergency Power	AC Input	DC Output	Style	Product size	Emergency Time	Battery
Beam 3017	3-80W LED Lamp with external LED driver	3.3W	85-265V, 50/60HZ	9-175V	Battery Internal	16*4.7*2.7cm	210mins	6.4V 1800mAh LiFePO4



BEAM 3053/3054/3055

INDUSTRIAL LIGHTING
LED EMERGENCY LIGHT



FEATURES

This LED Emergency Down Light is specially designed for ceiling recessed emergency lighting. Automatically light at once when buildings main power outage. 3 sizes for optional.



- NON-MAINTAINED
- Super thin: 3mm, can be fixed with only 3mm out the ceiling
- New Generation use LiFePO4 batteries: more safety

Code	Picture	Emergency Power, Lumen, IP	AC Input	Style	Product size LxHxW	Emergency Time	Battery
BEAM 3053		3W 150Lm IP20	85-265V, 50/60HZ	Non-Maintained, Recessed	Driver: 195x31x40mm CUT OUT: 42mm ø60mm	>180mins	6.4V 1800mAh LiFePO4
BEAM 3054		Ring for Beam 3053			ø100mm		
BEAM 3055		Ring for Beam 3053			ø140mm		



BEAM 1302 COB/1320 COB

INDUSTRIAL LIGHTING
LED STRIP LIGHT

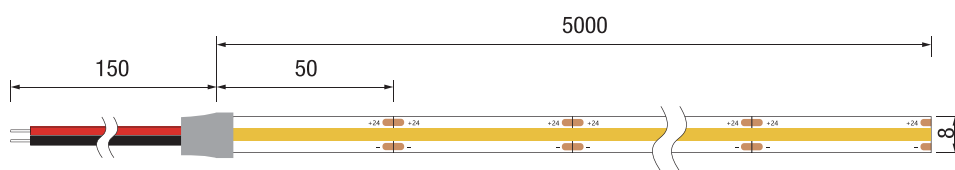

Beam 1302 COB

CCT	3000K
Power	9W/m
L×W×H	500 x 8 x 2mm
Watt/roll	45W
Voltage	DC24V
Lm/roll	4500Lm
Lm/m	900Lm
LEDs/m	480
LED-type	COB
IP	20



Beam 1320 COB

CCT	2700K
Power	9W/m
L×W×H	500 x 8 x 2mm
Watt/roll	45W
Voltage	DC24V
Lm/roll	4500Lm
Lm/m	900Lm
LEDs/m	480
LED-type	COB
IP	20



BEAM 1222 COB/1264 COB/1278 COB

INDUSTRIAL LIGHTING
LED STRIP LIGHT

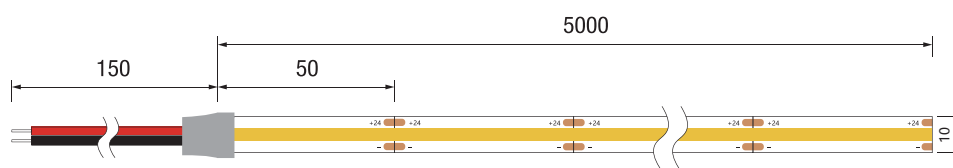

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip into a Novilum aluminium profile
Expected lifetime: 50,000 hours

TECHNICAL DATA

Dimmable	Yes
Voltage	24Vdc
CRI	>90
Beam angle	120°
IP	20

BEAM 1222 COB

CCT	3000K
Watt/rol	75W
Power	15W/m
Lm/roll	7500
Lm/m	1500Lm
L×W×H	500x10x2mm
LED type	COB

BEAM 1264 COB

CCT	2700K
Watt/rol	75W
Power	15W/m
Lm/roll	7500
Lm/m	1500Lm
L×W×H	500x10x2mm
LED type	COB


BEAM 1278 COB

CCT	4000K
Watt/rol	75W
Power	15W/m
Lm/roll	7500
Lm/m	1500Lm
L×W×H	500x10x2mm
LED type	COB



INDUSTRIAL LIGHTING
LED STRIP LIGHT

BEAM 1221 COB/1295 COB

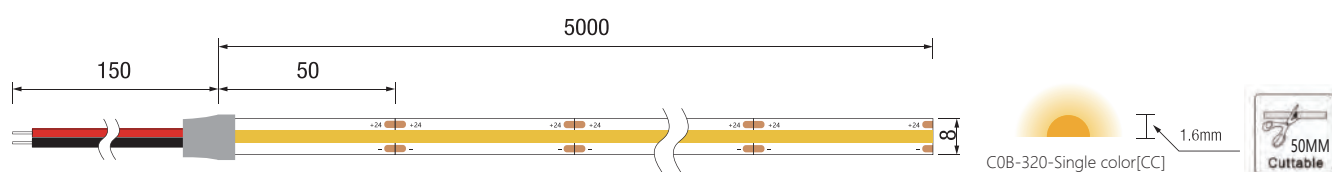

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip into a Novilum aluminium profile
Expected lifetime: 50,000 hours

BEAM 1221 COB


CCT	3000K
Watt/rol	25W
Power	5W/m
Lm/roll	2500
Lm/m	500Lm
L×W×H	500 x 8 x 2mm
LED type	COB

TECHNICAL DATA

Dimmable	Yes
Voltage	24Vdc
CRI	>90
Beam angle	120°
IP	20





BEAM 1295 COB

CCT	2700K
Watt/rol	25W
Power	5W/m
Lm/roll	2500
Lm/m	500
L×W×H	500 x 8 x 2mm
LED type	COB

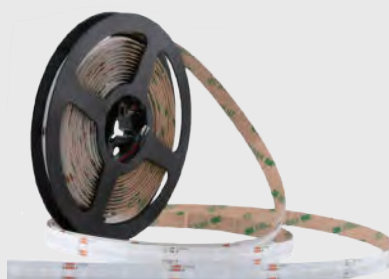

BEAM 1279 COB/1223 COB/1290 COB

INDUSTRIAL LIGHTING
LED STRIP LIGHT

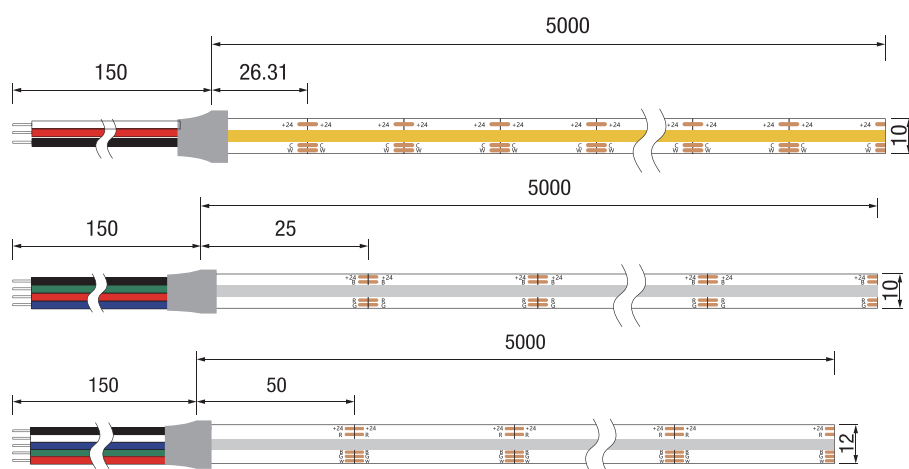

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip into a Novilum aluminium profile
Expected lifetime: 50,000 hours

TECHNICAL DATA

Dimmable	Yes
Voltage	24Vdc
CRI	>90
Beam angle	120°
IP	20

BEAM 1279 COB

CCT	3000K+6000K
Watt/rol	110W
Power	11+11W/m
Lm/roll	11000
Lm/m	2200Lm
L×W×H	500x10x2mm
LED type	COB

BEAM 1223 COB

CCT	RGB
Watt/rol	75W
Power	15W/ m
Lm/roll	3075Lm
Lm/m	615Lm
L×W×H	500x10x2mm
LED type	COB


BEAM 1290 COB

CCT	RGB+WW (2700K)
Watt/rol	100W
Power	20W/ m
Lm/roll	5800Lm
Lm/m	1160Lm
L×W×H	500x12x2mm
LED type	COB



INDUSTRIAL LIGHTING
LED STRIP LIGHT

BEAM 1221/1295

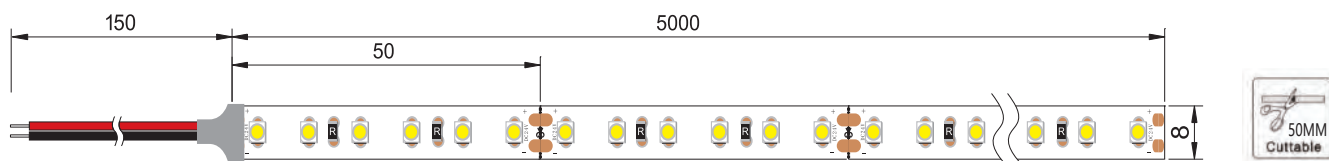

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip into a Novilum aluminium profile
Expected lifetime: 50,000 hours

TECHNICAL DATA

Dimmable	Yes
Voltage	24Vdc
CRI	>90
Beam angle	120°
IP	20

BEAM 1221

CCT	3000K
L×W×H	500 x 8 x 2,2mm
Power	4,8W/m
Watt/roll	24W
Lm/roll	1850Lm
Lm/m	370Lm
LEDs/m	60
LED-type	SMD3528


BEAM 1295

CCT	2700K
L×W×H	500 x 8 x 2,2mm
Power	4,8W/m
Watt/roll	24W
Lm/roll	1850Lm
Lm/m	370Lm
LEDs/m	60
LED-type	SMD3528



BEAM 1222/1278

INDUSTRIAL LIGHTING
LED STRIP LIGHT

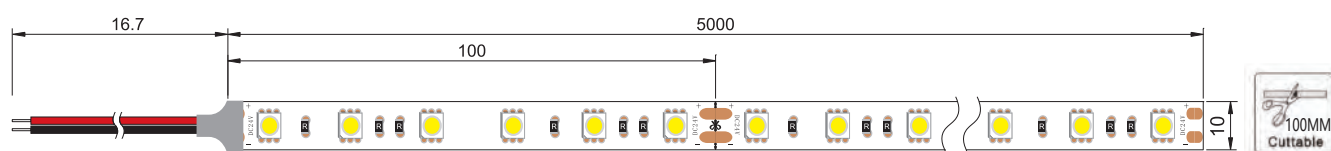

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip into a Novilum aluminium profile
Expected lifetime: 50,000 hours

TECHNICAL DATA

Dimmable	Yes
Voltage	24Vdc
CRI	>90
Beam angle	120°
IP	20

BEAM 1222

CCT	3000K
L×W×H	500 x 10 x 2mm
Power	14,4W/m
Watt/roll	72W
Lm/roll	5500Lm
Lm/m	1100Lm
LEDs/m	60
LED-type	SMD5050


BEAM 1278

CCT	4000K
L×W×H	500 x 10 x 2mm
Power	14,4W/m
Watt/roll	72W
Lm/roll	6000Lm
Lm/m	1200Lm
LEDs/m	60
LED-type	SMD5050



BEAM 1263/1289

INDUSTRIAL LIGHTING
LED STRIP LIGHT

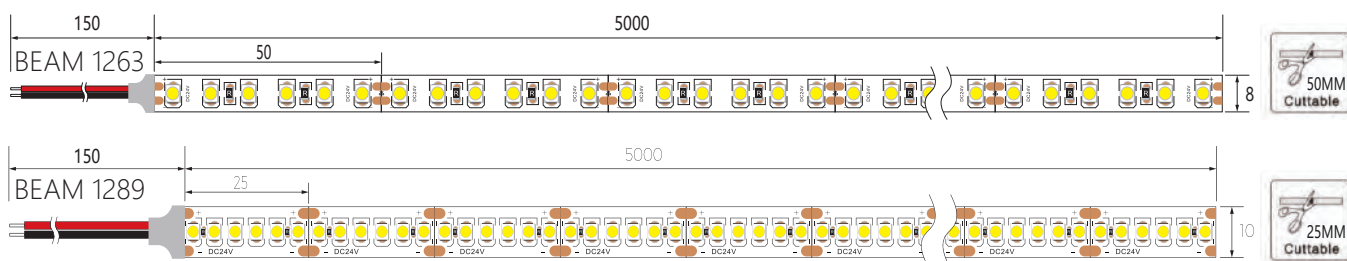

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip into a Novilum aluminium profile
Expected lifetime: 50,000 hours

BEAM 1263

CCT	3000K
L×W×H	500 x 8 x 2,2mm
Power	9,6W/m
Watt/roll	48W
Lm/roll	4700Lm
Lm/m	940Lm
LEDs/m	120
LED-type	SMD3528

TECHNICAL DATA

Dimmable	Yes
Voltage	24Vdc
CRI	> 90
Beam angle	120°
IP	20


BEAM 1289

CCT	3000K
L×W×H	500 x 10 x 2mm
Power	19,2W/m
Watt/roll	96W
Lm/roll	7000Lm
Lm/m	1400Lm
LEDs/m	240
LED-type	SMD3528



BEAM 1279

INDUSTRIAL LIGHTING
LED STRIP LIGHT

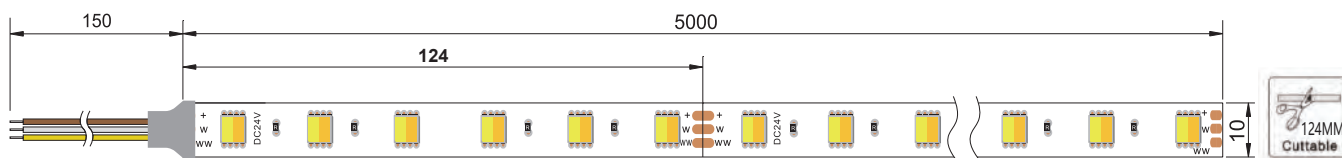

PRODUCT FEATURES

Roll of 5m (also available in custom lengths)
Can be cut at 12.4cm intervals
Max. 5m LED strip connectable to one power supply
For optimal lifespan, it is important to clamp the LED strip in a Novilum profile


Beam 1279

CCT	Tunable white (3000K/6000K)
L×W×H	500 x 10 x 2mm
Dimmable	Yes
Power	19,2W/m
Watt/roll	96W
Voltage	24Vdc
CRI	>80
Lm/roll	9600Lm
Lm/m	1920Lm
LEDs/m	112
Beam angle	120°
IP	20



BEAM 1223/1290

INDUSTRIAL LIGHTING
LED STRIP LIGHT

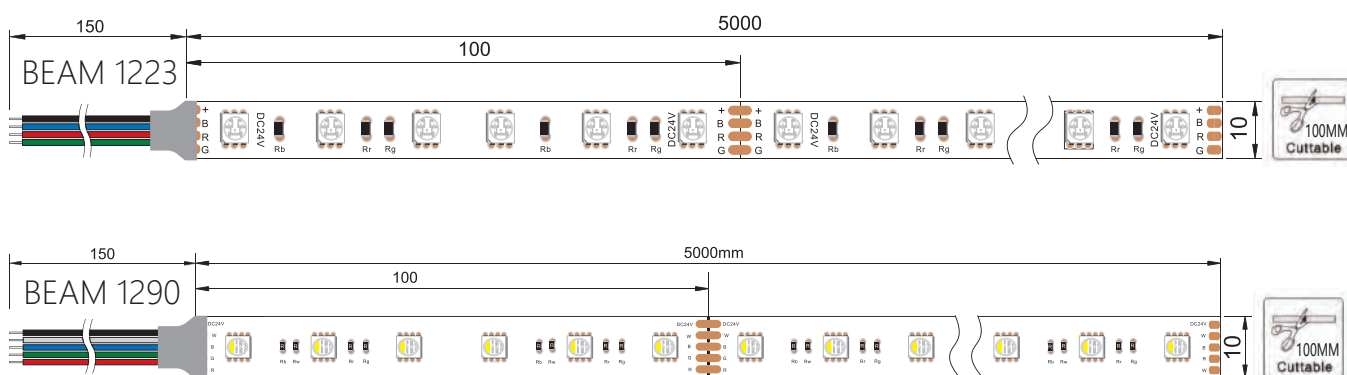


Beam 1223

CCT	RGB
L×W×H	500 x 10 x 2mm
Power	14,4W/m
Watt/roll	72W
Lm/roll	2450Lm
Lm/m	490Lm
LEDs/m	60
LED-type	SMD5050


Beam 1290

CCT	RGB+WW (2700K)
L×W×H	500 x 10 x 2mm
Power	19,2W/m
Watt/roll	96W
Lm/roll	7680Lm
Lm/m	1536Lm
LEDs/m	120
LED-type	SMD5050

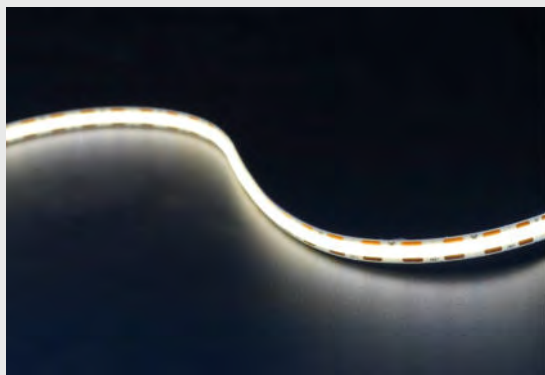

BEAM 1321 COB


INDUSTRIAL LIGHTING
LED STRIP LIGHT

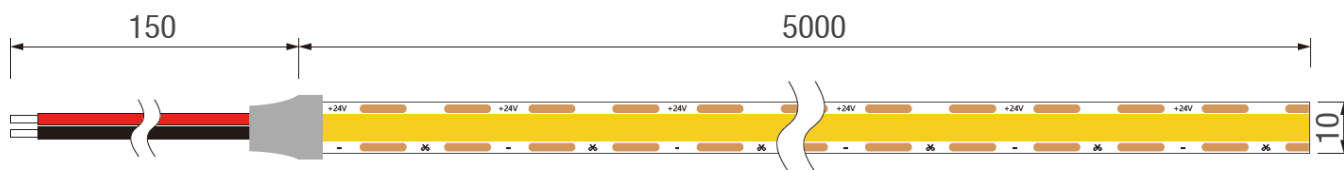

TECHNICAL DATA

Input voltage	24VDC
Power/m	15W/m
Lumen	1095Lm/m
Beam angle	180°
CRI (Ra)	> 90
LEDs/m	480LEDS
CCT	3000K
Size	W10mm x H1,8mm
Cutable length	free cutting
Length	50meters/roll
Working hours	50000h
Working temperature	-25°C~+45°C





CONNECTORS

INDUSTRIAL LIGHTING
LED STRIP LIGHT

IP20



RoHS

CE

2 years
warranty


TECHNICAL DATA

Code	Type
Beam 1306	10mm with wire - SMD
Beam 1307	10mm without wire - SMD
Beam 1312	10mm RGB with wire - SMD
Beam 1313	10mm RGB without wire - SMD
Beam 1314	10mm RGB with L-connector - SMD
Beam 1317	10mm RGB W with L-connector - SMD
Beam 1362	10mm RGB W without wire - SMD
Beam 1363	10mm RGB W with wire - SMD
Beam 1364	10mm with L-connector - SMD + COB
Beam 1365	10mm without wire - COB
Beam 1366	10mm with wire - COB
Beam 1367	8mm with L-connector - SMD + COB
Beam 1368	8mm without wire - SMD + COB
Beam 1369	8mm with wire - SMD + COB
Beam 1370	10mm RGB W without wire - COB
Beam 1371	10mm RGB W with wire - COB

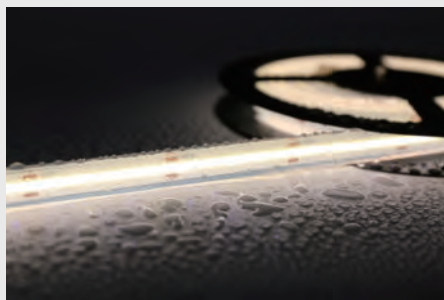


BEAM 1281 COB

INDUSTRIAL LIGHTING
LED STRIP LIGHT

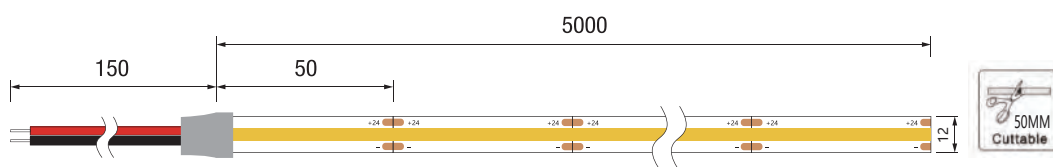

TECHNICAL DATA

Input voltage	DC24V
Power/m	15W
Beam angle	120°
CRI (Ra)	>90
LEDs/m	480LEDS
Light efficiency	100lm/w
CCT	3000K
Cuttable length	50mm
PCB Width	13mm, double-layer FPC (2Oz)
Adhesive tape	3M adhesive tape on the back
Working hours	50000h
Working temperature	-25°C ~ +45°C

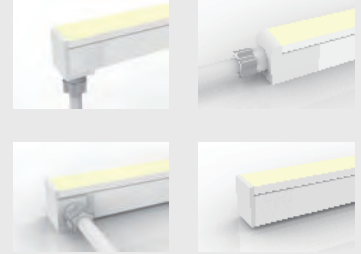

BEAM 1282M



INDUSTRIAL LIGHTING
LED STRIP LIGHT



RoHS

CE

IP68




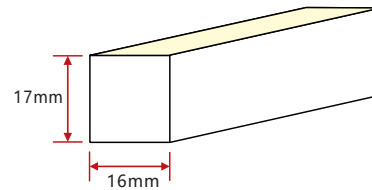
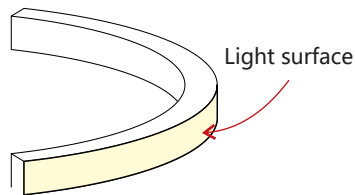


TECHNICAL DATA

Input voltage	DC24V
Power/m	10W
Beam angle	120°
CRI (Ra)	>90
LEDs/m	60LEDs
Light efficiency	83lm/w
CCT	2700K
Cuttable length	100mm
Working hours	50000h
Working temperature	-25°C~+45°C

Beam 1296:

Aluminium profile for
LED strip Beam 1282M






BEAM 1353 COB

INDUSTRIAL LIGHTING
LED STRIP LIGHT



TECHNICAL DATA

Input voltage	AC230V
Power/m	11W
Beam angle	180°
CRI (Ra)	>80
LEDs/m	288LEDS
CCT	3000K
Size	W15mm x H7mm
Cuttable length	0.5m
PCB width	8mm
Length	50meters/roll
Working hours	50000h
Working temperature	-25°C~+45°C



Beam 1354
Clip, 2pcs/meter



Beam 1355
End cap



Beam 1356
2 pins connector




Beam 1357
Cable for single color
led strip light 50cm
white cable+plug




BEAM 1352

INDUSTRIAL LIGHTING
LED STRIP LIGHT

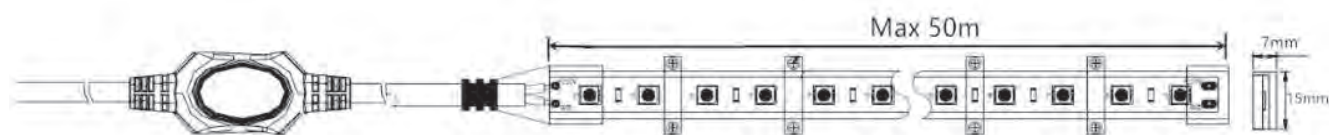

TECHNICAL DATA

Input voltage	AC230V
Power/m	6W
Beam angle	120°
CRI (Ra)	>80
LEDs/m	120LEDs
CCT	3000K
Size	W15mm x H7mm
Cuttable length	1m
PCB width	10mm
Length	50meters/roll
Working hours	50000h
Working temperature	-25°C~+45°C



Beam 1354
Clip, 2pcs/meter




Beam 1355
End cap



Beam 1356
2 pins connector




Beam 1357
Cable for single color
led strip light 50cm
white cable+plug



BEAM 1224/1224B

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT

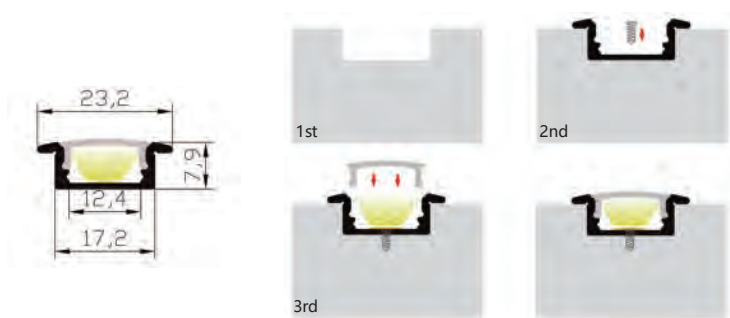

RoHS

CE

IP20

2 years
warranty

ALUMINUM PROFILE



Silver



Black

Material:

AL6063-T5 Aluminium

Surface:

Anodized/Black

PC cover:

Transparent/Diffuser/Black transparent

Lighting source width:

12 mm

Available lengths:

2m

Application:

Commercial lighting / Indoor lighting
Decorative design

COVER




END CAP





BEAM 1225/1225B/1225W

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT

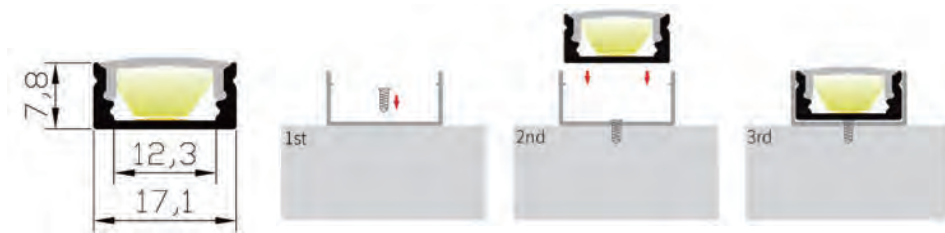

RoHS

CE

IP20

2 years
warranty

ALUMINUM PROFILE



Silver

Black

White

Material: AL6063-T5
Surface: Anodized/Black/White
PC cover: Transparent/Diffuser/Black transparent
Lighting source width: 12 mm
Available lengths: 2m
Application: Commercial lighting / Indoor lighting
Decorative design


COVER




CLIP



END CAP

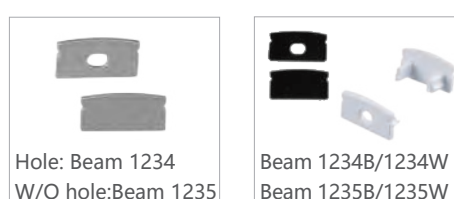



BEAM 1226/1226B/1226W

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT



RoHS

CE

IP20

2 years
warranty

ALUMINUM PROFILE



Silver



Black



White

Material:

AL6063-T5

Surface:

Anodized/Black/White

PC cover:

Transparent/Diffuser/Black transparent

Lighting source width:

12 mm

Available lengths:

2m

Application:

Commercial lighting / Indoor lighting
Decorative design

COVER




CLIP



END CAP





BEAM 1227/1227B

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT



RoHS



IP20

2 years
warranty

ALUMINUM PROFILE



Beam 1227
Length: 2m



Beam 1227B
Length: 2m



Silver



Black

Material:

AL6063-T5 Aluminium

Surface:

Anodized/Black

PC cover:

Transparent/Diffuser/Black transparent

Lighting source width:

12 mm

Available lengths:

2m

Application:

Commercial lighting / Indoor lighting
Decorative design

COVER



Transparent: Beam 1228
Diffuser: Beam 1229
Length: 2m



Black: Beam 1228B
Length: 2m

END CAP



Hole: Beam 1239
W/O hole: Beam 1240




Beam 1239B
Beam 1240B



BEAM 1230

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT

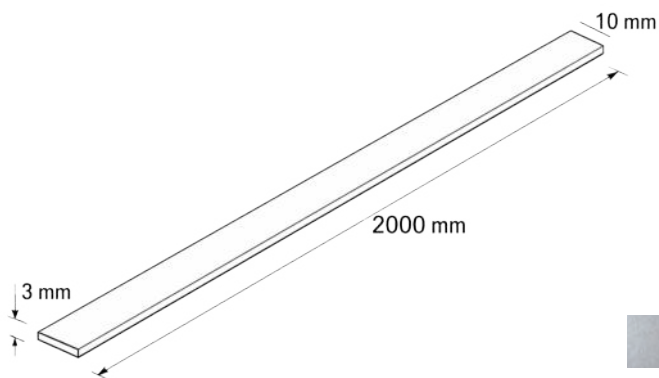

RoHS

CE


IP20

2 years
warranty

 Silver

Aluminium base voor single led strip

Material:	Aluminium
L x W x H:	200 x 10 x 3 mm
Available lengths:	2m
Application:	Commercial lighting / Indoor lighting Decorative design

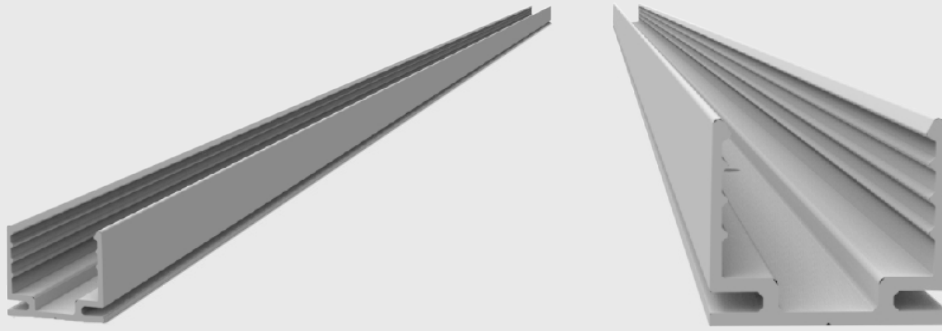

BEAM 1296

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT




RoHS

CE

IP20

2 years
warranty

Dimensions:

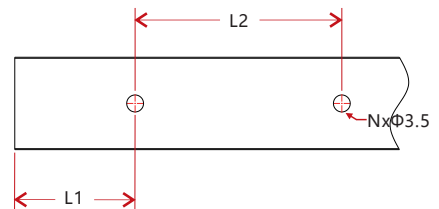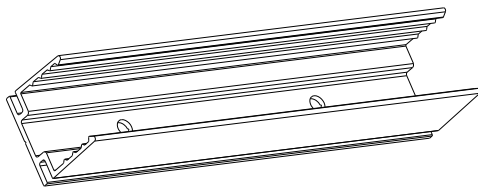


Code	W*H(mm)	Standard Length(mm)	L1(mm)	L2(mm)	Screw Hole(mm)	Hole Number	For Product
Beam 1296	19*18	2000	100	200	Φ3.5	10	Beam 1282M



BEAM 1340

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT



RoHS

CE

IP20

2 years
warranty

ALUMINUM PROFILE



 Silver

Material: AL6063-T5 Aluminium

Surface: Anodized

PC cover: Transparent/Diffuser

Lighting source width: 12 mm

Available lengths: 2m


Application: Commercial lighting / Indoor lighting
Decorative design

COVER




END CAP



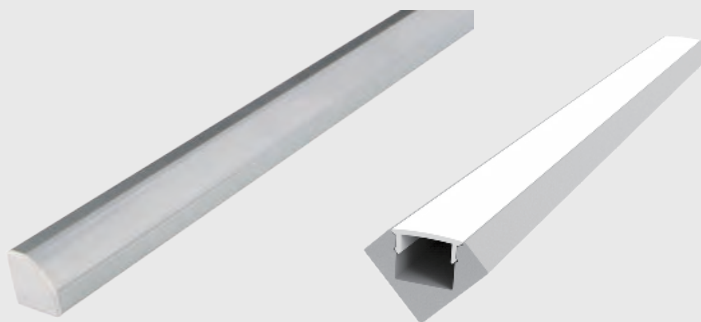

BEAM 1331

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT

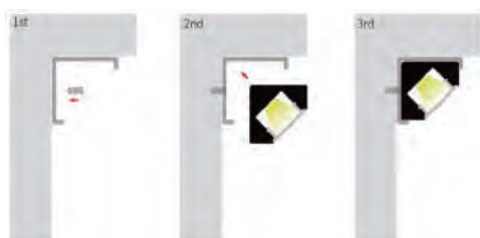

RoHS

CE

IP20

2 years
warranty

ALUMINUM PROFILE



COVER



 Silver

Material:

AL6063-T5

Surface:

Anodized

PC cover:

Diffuser/Transparent

Lighting source width:

12 mm

Available lengths:

2m

Application:

Commercial lighting /Indoor lighting
Decorative design

CLIP





END CAP





BEAM 1337B

INDUSTRIAL LIGHTING
ALUMINUM PROFILE FOR LED STRIP LIGHT

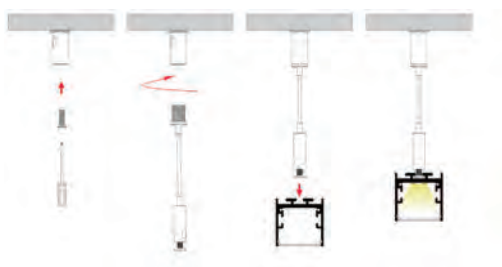

RoHS

CE

IP20

2 years
warranty

Black

Code	Picture	Discription	Material	Color
Beam 1337B		Profile	Aluminum	Black
Beam 1338		Cover	PC	Diffuser
Beam 1339B		End cap	without hole	Black

Material:	AL6063-T5 Aluminium
Surface:	Black
PC cover:	Diffuser
Led strips Width:	18mm
Available lengths:	2m
Application:	Commercial lighting / Indoor lighting



DRIVERS 24VDC

INDUSTRIAL LIGHTING
DRIVERS AND CONTROLLERS FOR LED STRIP LIGHT

RoHS

CE

IP67

2 years
warranty

TECHNICAL SPECIFICATIONS

Code	Mean Well
Output voltage	24VDC
L x W x H	See table
Power	20W / 35W / 60W / 100W / 150W / 240W / 320W / 480W
Voltage	220 - 240V 50 - 60Hz
IP	67

PRODUCT FEATURES

- o Max. 5m LED strip per piece connected to a power supply
- o Protection against short circuit and overvoltage
- o Long service life
- o Application: indoor and outdoor lighting

Execution

Code	Power	Current	Dimension
MWLPV-20/24	20W	840mA	118 x 35 x 26mm
MWLPV-35/24	35W	1500mA	148 x 40 x 30mm
MWLPV-60/24	60W	2500mA	163 x 43 x 32mm
MWLPV-100/24	100W	4200mA	190 x 52 x 37mm
MWLPV-150/24	150W	6300mA	222 x 68 x 39mm
MWELG-240/24	240W	10.000mA	244 x 68 x 39mm
MWHLGB-320/24	320W	13.340mA	252 x 90 x 44mm
MWHLG-480/24	480W	20.000mA	262 x 125 x 44mm

RoHS

CE

IP20

2 years
warranty



Beam 1254 + Beam 1255 (available separately)

LxBxH controller	120 x 55 x 17mm
LxBxH receiver	168 x 52 x 28mm
Power	4 x 5000mA
Voltage	24V – 480W

- o RF RGB / RGBW remote control (4 zones)
- o Compatible with Beam 1255 (RGB receiver 1 zone 4x5A)
- o Possibility to control multiple RGB receivers (Beam 1255) with 1 remote control
- o RF RGB receiver (1 zone) 4 channels
- o Compatible with Beam 1254 (RGB remote control 4 zones)



Beam 1253 (set)

LxBxH controller	120 x 48 x 17mm
LxBxH receiver	143 x 45 x 17mm
Power	3 x 5000mA
Voltage	24V – 360W

- o KIT: single color remote control
INCLUSIVE Beam 1258 (receiver 1 zone) 3 channels
- o Possibility to control multiple receivers (Beam 1258) with 1 remote control



Beam 1280 (set)

LxBxH controller	120 x 49 x 17mm
LxBxH receiver	143 x 45 x 17mm
Power	3 x 5000mA
Voltage	24V – 360W

- o KIT: remote control for Beam 1279
(LED - strip tunable white)
INCLUDING Beam 1258 (receiver 1 zone)
3 channels
- o Service life: 20,000 burning hours



Beam 1256 (set)

LxBxH controller	120 x 48 x 17mm
LxBxH receiver	143 x 45 x 17mm
Power	3 x 5000mA
Voltage	24V – 360W

- o KIT: RGB remote control
INCLUSIVE Beam 1258 (receiver 1 zone)
3 channels
- o Possibility to control multiple receivers (Beam 1258) with 1 remote control

RoHS

CE

IP20

2 years warranty



Beam 1257

LxBxH	168 x 52 x 28mm
Power	4 x 5000mA
Voltage	24V - 480W
IP	20

- o Receiver for PWM push - button dimming
- o Works only with a push - button
(is not compatible with our remote controls)
- o 4 channels



Beam 1380

LxBxH	122 x 38 x 22mm
Power	6A/channel
Voltage	DC12V~24V
IP	20

- o WiFi & BT 5-in-1 LED strip controller
- o PWM control
- o Wireless
- o 4G controlled by Tuya Smart Life APP
- o Compatible with Beam 1381 and 1382

Beam 1381

LxBxH	140 x 46 x 17m
Voltage	24V

- o Remote control RGB-W
- o 4-zone



Beam 1382

LxBxH	140 x 46 x 17m
Voltage	24V

- o Remote control single colour
- o 4-zone



Beam 1360

LxBxH	65 x 24 x 10mm
Power	3,5A - max. 80W
Voltage	5-24V DC
IP	20



- o Mini controller single color
- o WIFI + Bluetooth
- o control by Tuya Smart Life APP

Beam 1361

LxBxH	65 x 24 x 10mm
Power	3,5A - max. 80W
Voltage	5-24V DC
IP	20




- o Mini controller RGB W
- o WIFI + Bluetooth
- o control by Tuya Smart Life APP



BEAM 0841

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR



This is a IP65 IK08 LED bulkhead, this fixture provides an alternative to the color changeable and emergency function, it is a perfect answer to complete your outdoor look.

Materials of Housing : Aluminium

Materials of Optics : PC





Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0841	Black	12W	1250Lm	>80	Non-dimmable	3000K	Ø250x58mm



BEAM 0842

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

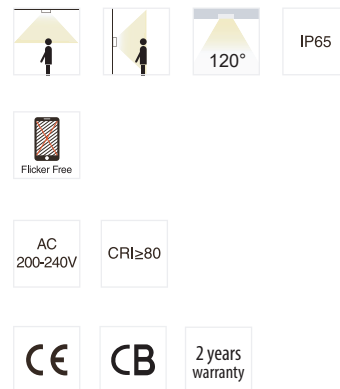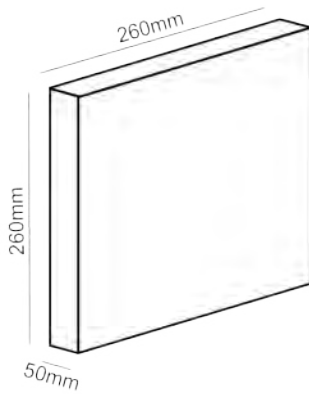



Materials of Housing : PC
Materials of Optics : PC

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0842	Transparent	20W	1550Lm	>80	Non-dimmable	3000K	260x260x50mm



BEAM 2033/2034/2035/2036

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

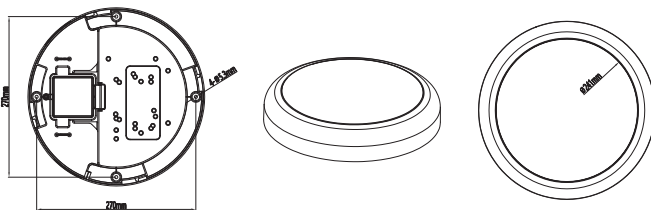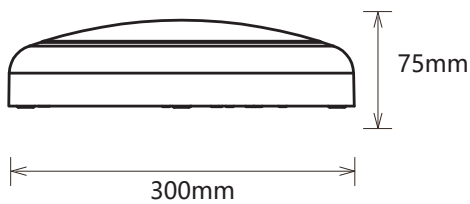

CCT dip switch changeable

3000K 4000K 5700K

This adopts high lumen SMD LED and lighter weight fire-rated material to ensure better heat resistance and corrosion resistance. The base and shade are detachable which make easier maintenance and installation. Available for both rear and side cable entry.

Materials of Housing : PC



Materials of Optics : PC

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 2033	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø300x75mm
Beam 2034 (Sensor)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø300x75mm
Beam 2035 (Emergency)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø300x75mm
Beam 2036 (Sensor+Emergency)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø300x75mm




BEAM 3085/3086 BEAM 3087/3088

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

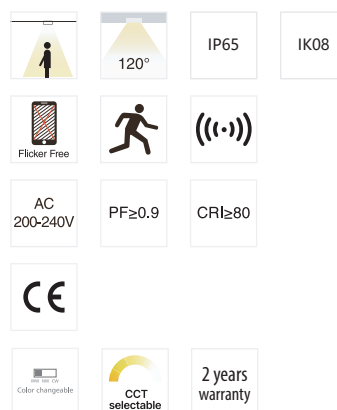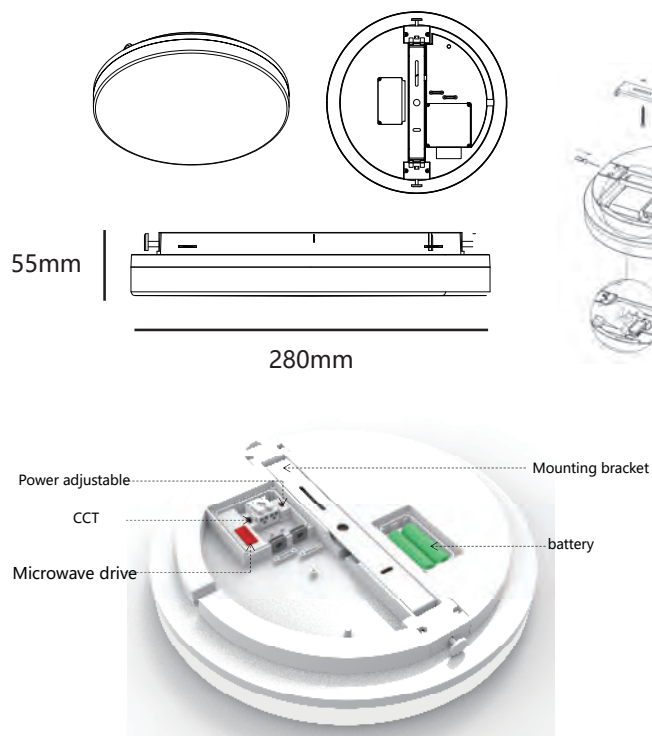

CCT dip switch changable


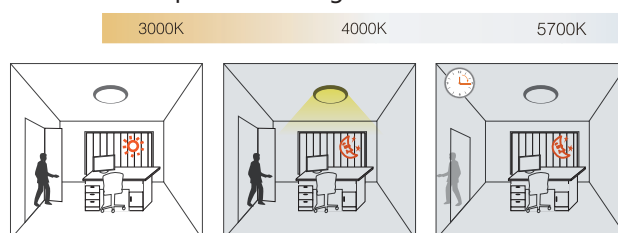


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3085	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø280x55mm
Beam 3086 (Sensor)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø280x55mm
Beam 3087 (Emergency)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø280x55mm
Beam 3088 (Sensor+Emergency)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø280x55mm




BEAM 3089/3090 BEAM 3091/3092

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

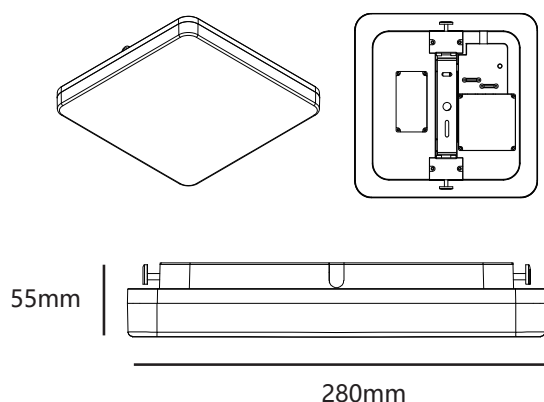

CCT dip switch changable

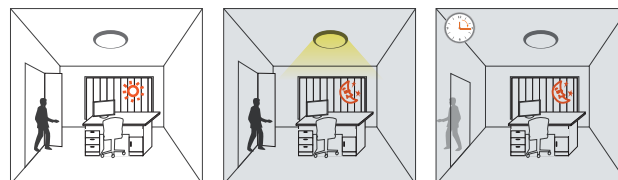


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3089	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	280x280x55mm
Beam 3090 (Sensor)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	280x280x55mm
Beam 3091 (Emergency)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	280x280x55mm
Beam 3092 (Sensor+Emergency)	White	18W	2000Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	280x280x55mm



BEAM 0727/0728


INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

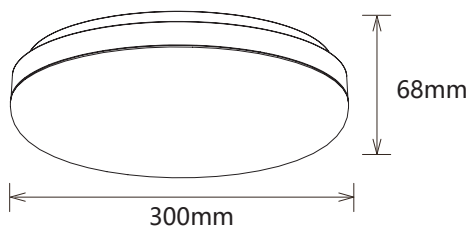


This adopts high lumen SMD LED and lighter weight fire-rated material to ensure better heat resistance and corrosion resistance. The base and shade are detachable which make easier maintenance and installation. Available for both rear and side cable entry.

Materials of Housing : PC

Materials of Optics : PC

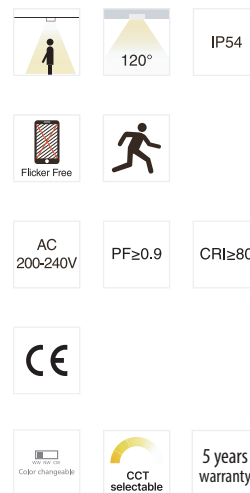

CCT dip switch changeable




Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0727	White	24W	2600Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø300x68mm
Beam 0728 (Emergency)	White	24W	2600Lm	>80	Non-dimmable	3CCT (3000K-4000K-5700K)	Ø300x68mm



**Driver & Light Source
interchangeable**

**Easily installation and
replacement**


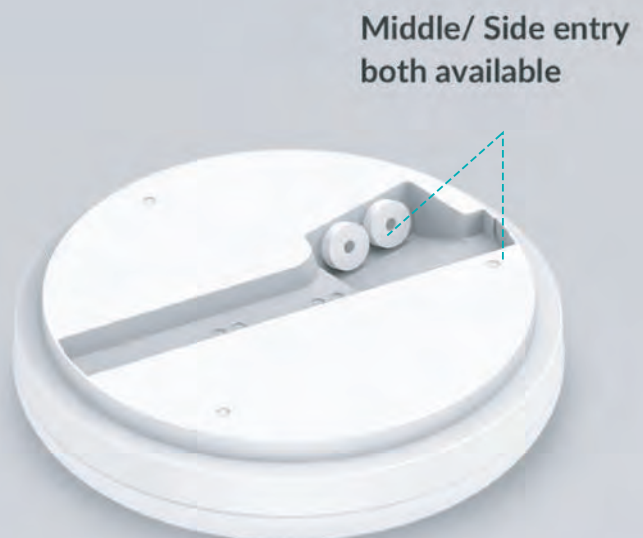


**Middle/ Side entry
both available**



BEAM 3094/3095

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

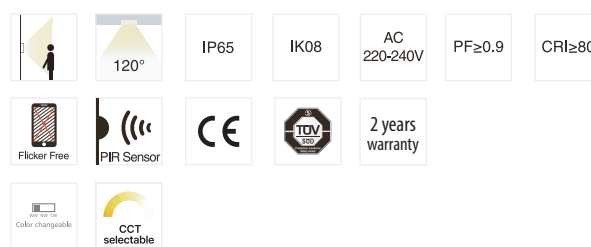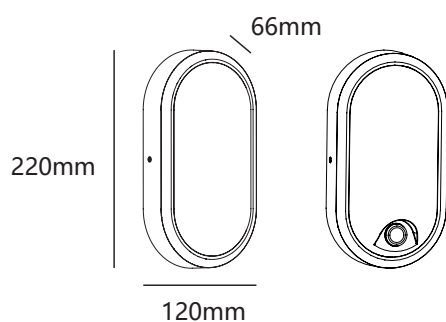


CCT dip switch changeable

2700K 3000K 4000K

CCT interchangeable with slide switch and PIR sensor function available. Available for both rear and side cable entry

Materials of Housing : PC

Materials of Optics : PC

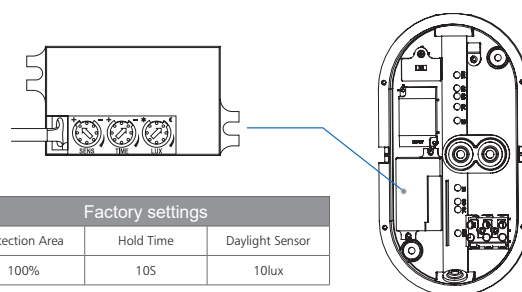


Factory settings		
Detection Area	Hold Time	Daylight Sensor
100%	10S	10lux

Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3094	Black	10W	1100Lm	>80	Non-dimmable	3CCT (2700K-3000K-4000K)	Ø220x120x66mm
Beam 3095 (Sensor)	Black	10W	1100Lm	>80	Non-dimmable	3CCT (2700K-3000K-4000K)	Ø220x120x66mm




BEAM 3076/3077/3078/3079

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR




Materials of Housing : Aluminum

Materials of Optics : PC

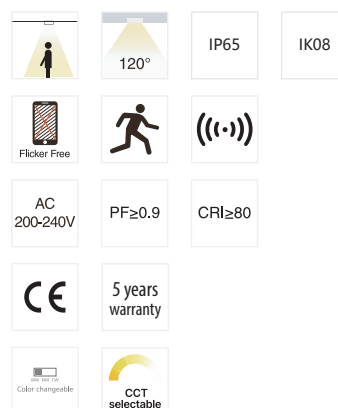

CCT dip switch changable

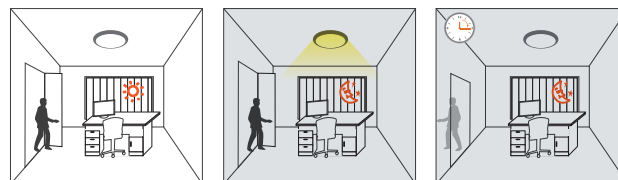


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3076	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm
Beam 3077 (Sensor)	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm
Beam 3078 (Emergency)	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm
Beam 3079 (Sensor+Emergency)	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm



BEAM 3080/3081/3082/3083

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR



Materials of Housing : Aluminum
Materials of Optics : PC



CCT dip switch changable




Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3080	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm
Beam 3081 (Sensor)	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm
Beam 3082 (Emergency)	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm
Beam 3083 (Sensor+Emergency)	Black	18W	2200Lm	>80	Non-dimmable	3CCT (3000K-4000K-6000K)	Ø275x85mm



BEAM 2013/2015

INDUSTRIAL LIGHTING
LED BULKHEAD OUTDOOR & INDOOR

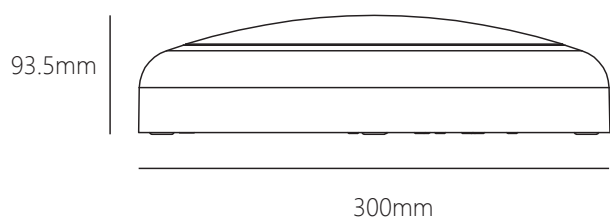

Outdoor lighting
White polycarbonate frame
Color consistency: SMD2835
Expected lifetime: 30,000 hours
PF: >0.9

Code	Version	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 2013	On/off	White	20W	1710Lm	>80	Non-dimmable	3000K	Ø300x93.5mm
Beam 2015	Emergency unit	White	20W	1710Lm	>80	Non-dimmable	3000K	Ø300x93.5mm



BEAM 0449 up to 0455


INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT

These water-proof fixtures are complete, including Osram driver and Samsung SMD 2835 LED-line


They have a housing and diffuser made of reinforced polycarbonate, stainless steel clips, and suspension brackets.

Product characteristics:

- 4000K (3000K available on order)
- IK08
- PF >0.9
- CRI >80
- Beam angle 120°
- IP66

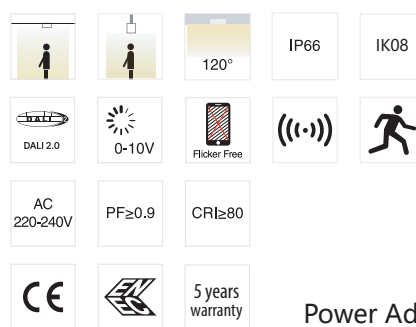

Power Adjustable



Push connector
Fast installation



BEAM 0449 up to 0455

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT

Including feed-through wiring 3 x 1.5mm²

BEAM 0451	L 670 x B 85 x H 88 mm	Possible via DIP-switch:	18 W	0.35 mA	2610 Lm	145 Lm/W
			15,4 W	0.30 mA	2236 Lm	145 Lm/W
			12,9 W	0.25 mA	1865 Lm	145 Lm/W
			10,3 W	0.20 mA	1491 Lm	145 Lm/W
BEAM 0452	L 1220 x B 85 x H 88 mm	Possible via DIP-switch:	40 W	0.35 mA	5800 Lm	145 Lm/W
			34,3 W	0.30 mA	4970 Lm	145 Lm/W
			28,6 W	0.25 mA	4147 Lm	145 Lm/W
			22,86 W	0.20 mA	3314,7 Lm	145 Lm/W
BEAM 0453 incl. motion sensor	L 1220 x B 85 x H 88 mm	Possible via DIP-switch:	40 W	0.35 mA	5800 Lm	145 Lm/W
			34,3 W	0.30 mA	4970 Lm	145 Lm/W
			28,6 W	0.25 mA	4147 Lm	145 Lm/W
			22,86 W	0.20 mA	3314,7 Lm	145 Lm/W
BEAM 0454	L 1520 x B 85 x H 88 mm	Possible via DIP-switch:	55 W	0.35 mA	8100 Lm	147 Lm/W
			47,1 W	0.30 mA	6924 Lm	147 Lm/W
			39,3 W	0.25 mA	5774 Lm	147 Lm/W
			31,43 W	0.20 mA	4620 Lm	147 Lm/W
BEAM 0455 incl. motion sensor	L 1520 x B 85 x H 88 mm	Possible via DIP-switch:	55 W	0.35 mA	8100 Lm	147 Lm/W
			47,1 W	0.30 mA	6924 Lm	147 Lm/W
			39,3 W	0.25 mA	5774 Lm	147 Lm/W
			31,43 W	0.20 mA	4620 Lm	147 Lm/W


Including feed-through cabling 5 x 1.5mm²

BEAM 0449	L 1520 x B 85 x H 88mm	62 W	0.35 mA	10000Lm	160Lm/W
BEAM 0449.5DE-OUT	L 1520 x B 85 x H 88mm	incl. emergency unit, with external connectors		62 W	10000Lm
BEAM 0452.5DE-OUT	L 1220 x B 85 x H 88mm	incl. emergency unit, with external connectors		40 W	5040Lm
BEAM 0453.5DE-OUT	L 1220 x B 85 x H 88mm	incl. motion sensor, emergency unit, with external connectors		40 W	5040Lm
BEAM 0454.5DE-OUT	L 1520 x B 85 x H 88mm	incl. emergency unit, with external connectors		55 W	8100Lm
BEAM 0455.5DE-OUT	L 1520 x B 85 x H 88mm	incl. motion sensor, emergency unit, with external connectors		55 W	8100Lm



BEAM 0473/0474


INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT

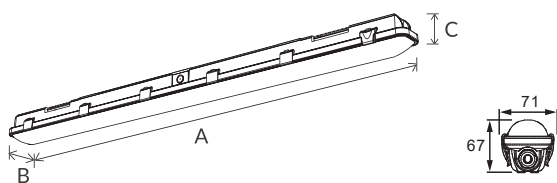

Materials of Housing: PC
Materials of Optics: PC


Power Adjustable

Code	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0473	36/30/25/20W	130Lm/W	>80	No	4000K	1220x71x67mm
Beam 0474	50/42/35/28W	130Lm/W	>80	No	4000K	1520x71x67mm

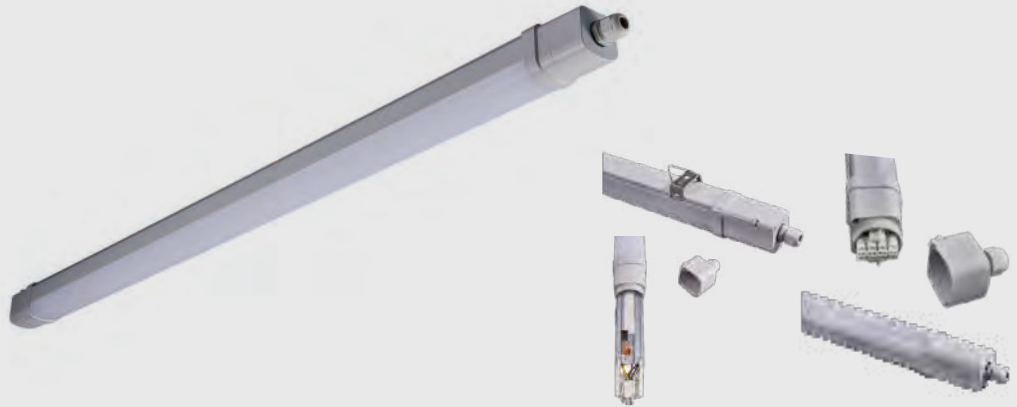

BEAM 3026/3027/3028

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT

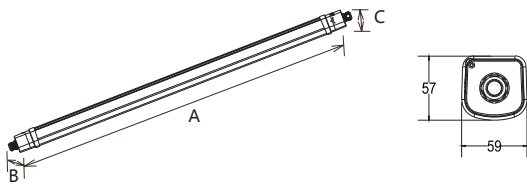


This vapor batten adopts high lumen efficiency SMD light source reach to 145lm/W, and flicker free driver. Tool free mains cable installation on both sides through twist lock fastener cover at both sides. With a reliable and robust housing structure (IK08 & IP65)

Materials of Housing: PC
Materials of Optics: PC



Power Adjustable



Linkable suggested luminaires Qty (200-240V)

17W-66PCS 32W-30PCS
43W-26PCS


Code	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 3026	18/15/12/10W	145Lm/W	>80	No	3000K/4000K/5000K	670x59x57mm
Beam 3027	32/27/23/18W	145Lm/W	>80	No	3000K/4000K/5000K	1220x59x57mm
Beam 3028	44/37/31/25W	145Lm/W	>80	No	3000K/4000K/5000K	1520x59x57mm



FARMING and INDUSTRIAL APPLICATION

BEAM S3127/S3024/S3025

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT


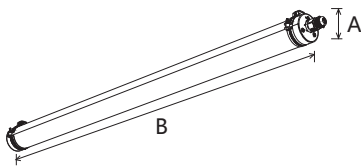


This is IP66 tube batten light design with PMMA IK10 and PC IK10 two diffusers version, 316 brushed stainless steel end cap with quickly terminal waterproof connector, easy to connect, independant bracket design, can be flexiable to adjust the installation angle of light, simple installation and replacement, multiple installation way available for surface mounted, suspending and wall mounted. An ideal replacement for traditional fluorescent tube.



Materials of Housing : PC/PMMA+AL6063+SUS316

Materials of Optics : PC/PMMA

Plastic connector and stainless steel connector for optional

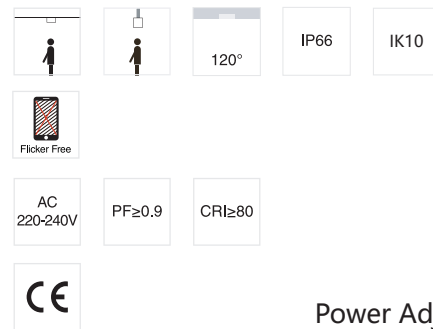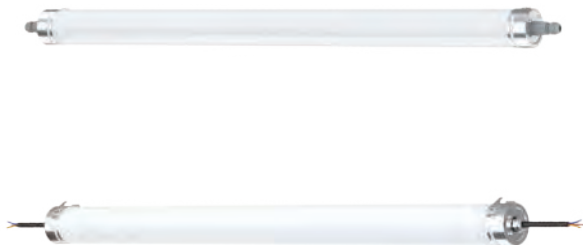


Power Adjustable



Push connector
Fast installation

Code	Power	Lumen	CRI	Dimmable	CCT	Size
BEAM S3127	20/17/14/11W	160Lm/W	>80	No	4000K	Ø70x600mm
BEAM S3024	38/32/27/22W	160Lm/W	>80	No	4000K	Ø70x1200mm
BEAM S3025	50/42/35/28W	160Lm/W	>80	No	4000K	Ø70x1500mm



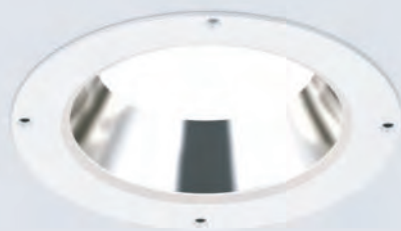


IP 65


20 JOULES=IK 10

BEAM S3032/S3033/S3034/S3035

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT

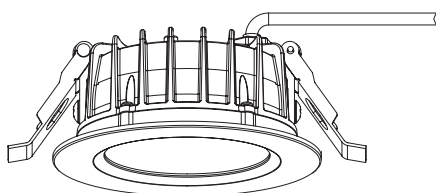

This SMD series downlight with traditional deep faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). IP65 waterproof and IK10 with high protection level are available.

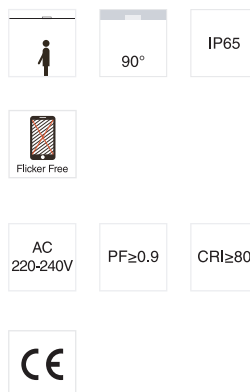

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Aluminium+Tempered glass

Painting :AkzoNobel brand powder coating

Application


hospital, health care center, aging care center, swimming pool etc.

Code	Power	Lumen	CRI	Dimmable	CCT	Size	Cut-out(mm)
Beam S3032	13W	105Lm/W	>80	No	4000K	Ø110x51mm	Ø90
Beam S3033	25W	110Lm/W	>80	No	4000K	Ø150x64mm	Ø125
Beam S3034	30W	110Lm/W	>80	No	4000K	Ø172x69mm	Ø150
Beam S3035	35W	110Lm/W	>80	No	4000K	Ø235x81mm	Ø200

IP 65
20 JOULES=IK 10

BEAM S3036/S3037/S3038

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT



This Led panel light is a pubish light, speical design with dustproof, waterproofIP65, explosion-proofIK10 and anti-tamper function suitable for hospitals, pharmaceutical factories, food processing plants. It's high lumen SMD 130lm/w, anti-glare UGR<19 design and CRI90, it's available for sensor and emergency function.

Materials of Housing: AL+SPCC

Materials of Optics: PC/PMMA/PS

Painting: Detergent resistant powdercoating/
anti-microbial painting



Code	Power	Lumen	Dimmable	CCT	Size(mm)	Cut-out(mm)
Beam S3036	35/30/25/20W	130Lm/W	No	4000K	592x325x81	560x315
Beam S3037	52/48/45/40W	130Lm/W	No	4000K	592x592x81	560x580
Beam S3038	52/48/45/40W	130Lm/W	No	4000K	325x1230x81	315x1190




IP 65


80 JOULES=IK 11++

BEAM S3040/S3041/S3042

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT

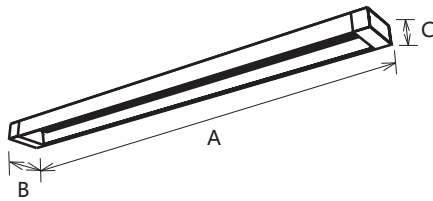

This batten light is especially designed for vandal proof application. The housing is made from stainless steel, with 4mm thickness UL94-V0, C diffuser, fire resistance and vandal proof. Front cover been fixed by torx screws. It's IP65 waterproof rating. IK11++ (80 JOULES impact test). Choose Bridgelux brand LEDs and Osram brand LED driver, ensure the lamp is durable for 8-10 years lifetime.

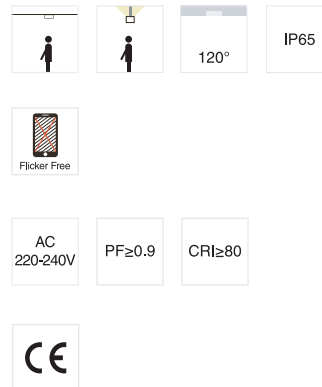

Application:

train station platform, foot-bridge, indoor stadium, semi-outdoor places, prison etc.


Materials of Housing : Stainless steel

Materials of Optics : PC opal white diffuser

AkzoNobel brand high intensity powder coating

Code	Power	Lumen	CRI	Dimmable	CCT	Size(mm)
Beam S3040	15W	2700Lm	>80	No	4000K	600x160x78.8
Beam S3041	25W	6050Lm	>80	No	4000K	1200x160x78.8
Beam S3042	32W	8500Lm	>80	No	4000K	1500x160x78.8



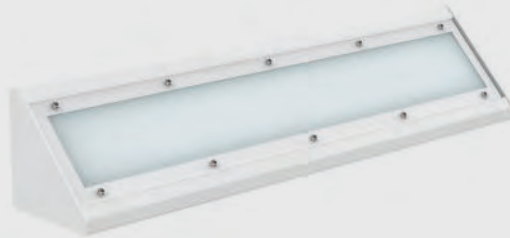


IP 65

80 JOULES=IK 11++

BEAM S3043/S3044/S3045/S3046

INDUSTRIAL LIGHTING
LED WATERPROOF LIGHT





This wall light is especially designed for vandal proof application. The housing is made from stainless steel, with 4mm thickness UL94-V0 PC diffuser, fire resistance and vandal proof. Front cover been fixed by torx screws. It's IP65 waterproof rating, IK11++ (80 JOULES impact test). Choose Bridgelux brand LEDs and Osram brand LED driver, ensure the lamp is durable for 8-10 years lifetime.

Materials of Housing : Stainless steel

Materials of Optics : PC opal white diffuser

Painting: AkzoNobel brand high intensity powder coating



Application

subway station, underpass, corridor of half-outdoor places, prison etc.


Code	Power	Lumen	CRI	Dimmable	CCT	Size(mm)
Beam S3043	8W	1700Lm	>80	No	4000K	320x160x128
Beam S3044	15W	2450Lm	>80	No	4000K	600x160x128
Beam S3045	25W	5800Lm	>80	No	4000K	1200x160x128
Beam S3046	32W	8700Lm	>80	No	4000K	1500x160x128





BEAM 0514/0516/0517

INDUSTRIAL LIGHTING
LED HIGH BAY LIGHT

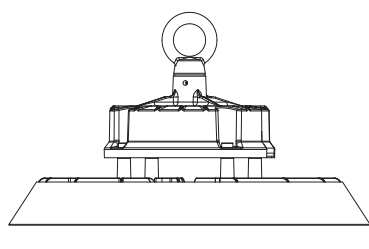

A

B




Screwless
fast connection



POWER Io ADJ

100%
80%
60%

HIGH
MID
LOW



The highbays are energy-efficient, have an aluminium housing and are suitable for use in humid rooms. They have a 1 - 10V dimmable driver, G5 technology and a unique cooling body.

160Lm/W
PF >0.9
4000K/3000K
CRI >80
Beam angle 120° (60°/90°)
IP65
LIFUD-driver



PC diffuser

Beam S0018-0514
Beam S0018-0516
Beam S0018-0517



Aluminium reflector

Beam S0019-0514
Beam S0019-0516
Beam S0019-0517

Beam 0514/160

(A) Ø 270 x (B) 157,76mm

100W/80W/60W

16000Lm

49 87 98 100 1000

Beam 0516/160

(A) Ø 290 x (B) 167,78mm

150W/120W/90W

24000Lm

54 89 98 99 100

Beam 0517/160

(A) Ø 320 x (B) 172,38mm

200W/160W/120W


32000Lm

56 89 98 99 100



BEAM 3018/3019/3020

INDUSTRIAL LIGHTING
LED HIGH BAY LIGHT

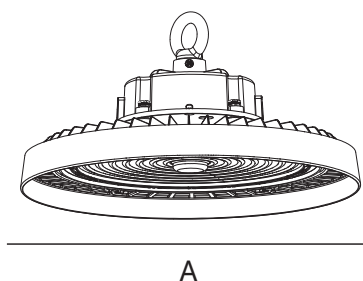

B




Screwless
fast connection



POWER Io ADJ

100%
80%
60%

HIGH
MID
LOW



These highbays have a built-in ZHAGA book 18 sensor holder, which is suitable for standard sensors. They also have an extra cable for 0-10V dimming function.

160Lm/W IP65
PF >0,9 CRI>80
4000K LIFUD-driver
Beam angle 120°(60°/90° on request)



Beam S3056
PC diffuser



Beam S3057
Aluminium reflector

Beam 3018
(A) Ø 255x (B) 155mm
100W/80W/60W
16000Lm


Beam 3019
(A) Ø 305x (B) 158mm
150W/120W/90W
24000Lm

Beam 3020
(A) Ø 360x (B) 158mm
200W/160W/120W
32000Lm



BEAM S3021/S3022/S3023

INDUSTRIAL LIGHTING
LED HIGH BAY LIGHT

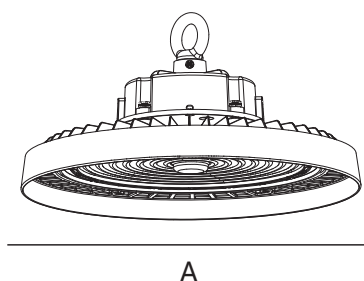


B



Screwless
fast connection



POWER Io ADJ
100%
80%
60%



These highbays have a built-in ZHAGA book 18 sensor holder, which is suitable for standard sensors. They also have an extra cable for 0-10V dimming function.

160Lm/W IP65
PF >0,9 CRI>80
4000K LIFUD-driver
Beam angle 120°(60°/90° on request)



Beam S3056
PC diffuser




Beam S3057
Aluminium reflector

Beam S3021
(A) Ø 305x (B) 158mm
240W
38400Lm

Beam S3022
(A) Ø 405x (B) 174mm
300W
48000Lm

Beam S3023
(A) Ø 500x (B) 198mm
500W/400W
80000Lm

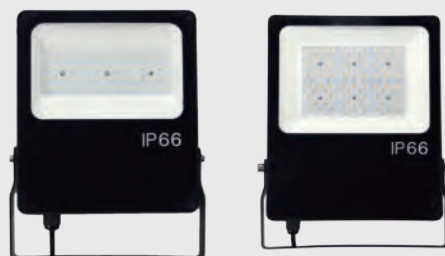

BEAM 0685/0783 up to 0690/0790 INDUSTRIAL LIGHTING LED FLOOD LIGHT AND LED STREET LIGHT



These floodlights have a pure aluminium body, good for heat dissipation. Due to the angle bracket, it is easy to install or replace. As a result, they are also adjustable. (Not dimmable!)

Philips SMD 3030
Color consistency: Max 6SDCM
Lifetime: >50,000h

IK08
PF >0.95
4000K
Not dimmable
CRI >80

Options:
Beam 078...: Symmetrical lens
Beam 068...: Asymmetrical lens





INDUSTRIAL LIGHTING

BEAM 0685/0783 up to 0690/0790 LED FLOOD LIGHT AND LED STREET LIGHT

Code	Wattage	Lumen	Dimensions	Fluxcode
Beam 0783 Only with symmetrical lens	10W	1400 Lm 140 Lm/W	LxBxH:182x122x47mm (L: 224mm incl. beugel)	
Beam 0784 Only with symmetrical lens	20W	2800 Lm 140 Lm/W	LxBxH:182x122x47mm (L: 224mm incl. beugel)	
Beam 0685-0785	30W	3900 Lm 130 Lm/W	LxBxH :200x169x51mm (L: 242mm incl. beugel)	40 79 98 100 124
Beam 0686-0786	50W	6550 Lm 131 Lm/W	LxBxH:282x204x52mm (L: 290mm incl. beugel)	40 79 98 100 100
Beam 0687-0787	100W	13000 Lm 130 Lm/W	LxBxH:300x278x52mm (L: 364mm incl. beugel)	38 77 98 100 125
Beam 0688-0788	150W	20400 Lm 136 Lm/W	LxBxH :325x394x56mm (L: 394mm incl. beugel)	38 78 98 100 124
Beam 0689-0789	200W	28000 Lm 140 Lm/W	LxBxH:376x394x56mm (L:445mm incl. beugel)	38 78 98 100 126
Beam 0690-0790	300W	42000 Lm 140 Lm/W	LxBxH:428x394x58mm (L:497mm incl. beugel)	40 78 97 97 100



INDUSTRIAL LIGHTING



ADC12 aluminum housing treated with electrophoresis and a special powder coating with good corrosion resistance.




Bracket by anti-corrosive material with special processing.



304 stainless steel screws.

Passed the strict salt spray testing, anti-corrosion up to C4.



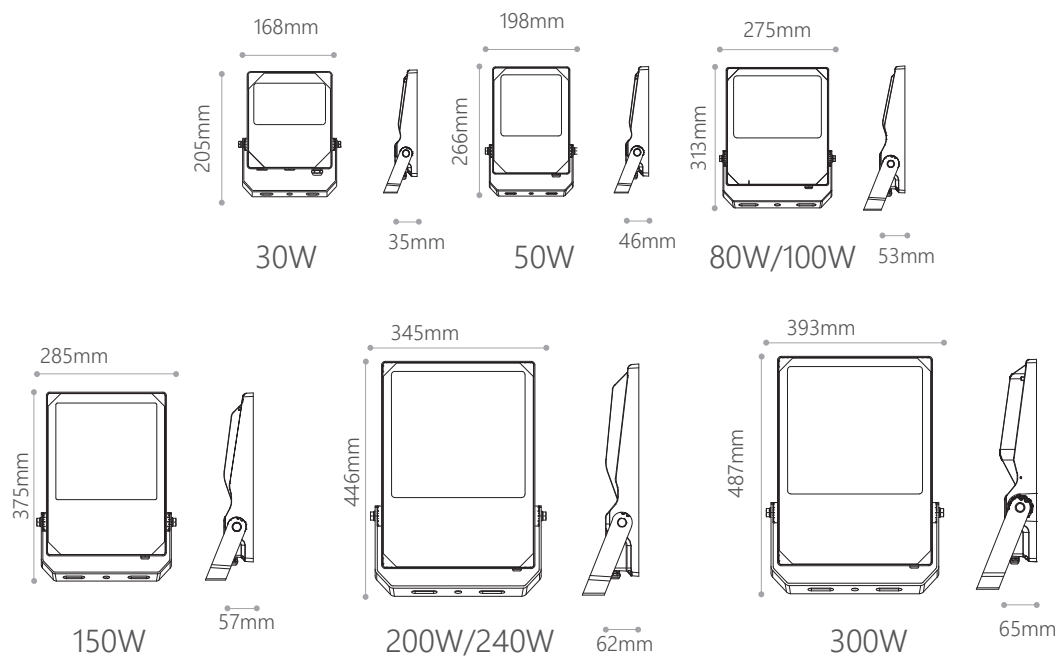


PRODUCT FEATURES



INDUSTRIAL LIGHTING

Code	Power Consumption (±10%)	Input voltage	CRI	Light Efficiency	Luminous Flux (lm) (±10% @4000K @5000K @5700K			Beam Angle	Correlated Color Tempaure	LED Type	Drvier Type
Beam 3004	30W				4,800lm	4,800lm	4,800lm				
Beam 3005	50W				8,000lm	8,000lm	8,000lm				
Beam 3006	80W				12,800lm	12,800lm	12,800lm				
Beam 3007	100W	220-240VAC	80	160lm/W	16,000lm	16,000lm	16,000lm	60° T3M	4000K	Lumileds2835	TUV CE listed Brand Driver
Beam 3008	150W				24,000lm	24,000lm	24,000lm				
Beam 3009	200W				32,000lm	32,000lm	32,000lm				
Beam 3010	240W				38,400lm	38,400lm	38,400lm				
Beam 3011	300W				48,000lm	48,000lm	48,000lm				



This is a cost-effective lighting solution with performance. The elegant and smooth surface design combines simplicity with robustness, making it an ideal choice for wholesale and projects.

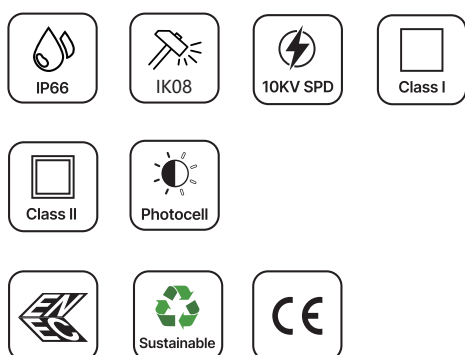

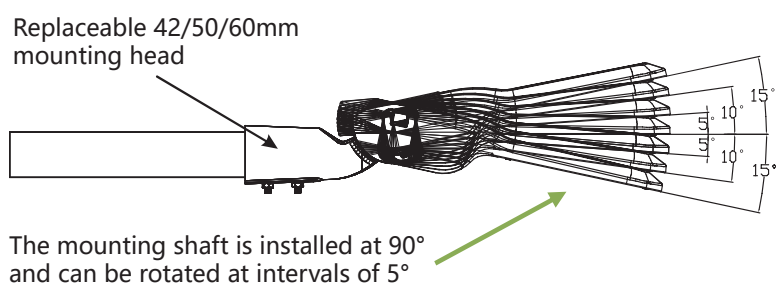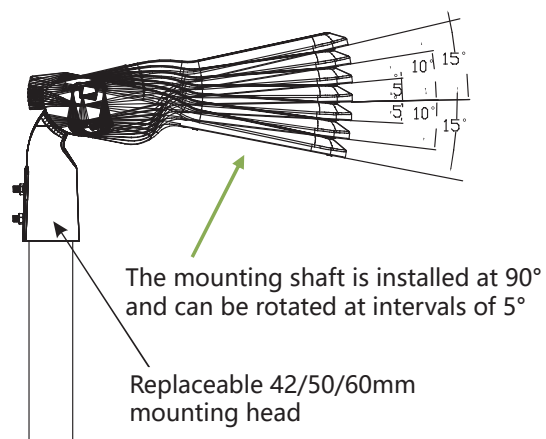


Code	Power	Lumen	LEDs	CCT	Beam Angle	Size(mm)
Beam 3120	30W	4800LM	5050	4000K	120°	L493xW174xH108mm
Beam 3122	80W	12800LM	5050	4000K	120°	L562xW200xH108mm



Code	Power	Lumen	LEDs	CCT	Beam Angle	Size(mm)
Beam S 3121	50W	8000LM	5050	4000K	120°	L493xW174xH108mm
Beam S 3123	100W	16000LM	5050	4000K	120°	L607xW240xH108mm
Beam S 3124	150W	24000LM	5050	4000K	120°	L680xW260xH108mm
Beam S 3125	200W	32000LM	5050	4000K	120°	L776xW300xH108mm
Beam S 3126	250W	40000LM	5050	4000K	120°	L776xW300xH108mm


 This product is a special order item
(delivery time of at least 12 weeks)





BEAM 0150B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

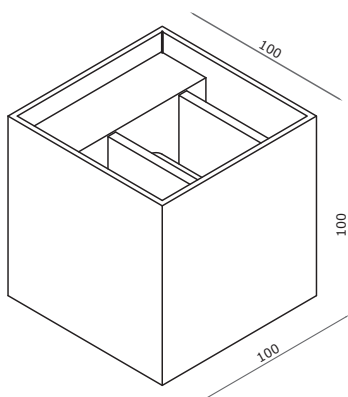

PRODUCT FEATURES

Aluminium square wall luminaire
Up/Down lighting
Adjustable beam

Application area:
Indoor and outdoor lighting

Including:
LED module
LED driver



TECHNICAL SPECIFICATIONS

Code	Beam 0150B
Color	Black
LxBxH	100 x 100 x 100mm
Class	LED
Adjustable	Yes
Dimmable	No
Power	2x 3W
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
IP	54



BEAM 0008B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

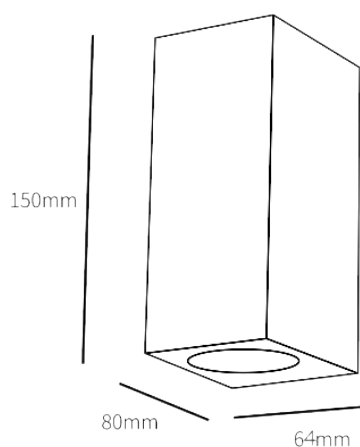

PRODUCT FEATURES

Aluminium double wall luminaire
Up/down lighting
Application area:
Indoor and outdoor lighting
Excluding GU10 LED




TECHNICAL SPECIFICATIONS

Code	Beam 0008B
Color	Black
LxBxH	80x64x150mm
Class	LED
Adjustable	No
Dimmable	Depends on type GU10
Power	Max. 2x 10W
Voltage	220 - 240V 50 - 60Hz
Fitting	2 x GU10
IP	54



BEAM 0009B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

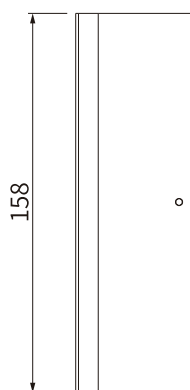

PRODUCT FEATURES

Aluminium square wall luminaire
Up/Down lighting
Adjustable beam

Application area:
Indoor and outdoor lighting

Including:
LED module
LED driver



TECHNICAL SPECIFICATIONS

Code	Beam 0009B
Color	Black
LxBxH	60x56x158mm
Class	LED
Adjustable	No
Dimmable	No
Power	2x 6W
Lumen	1020LM
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
IP	65




BEAM 0015B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

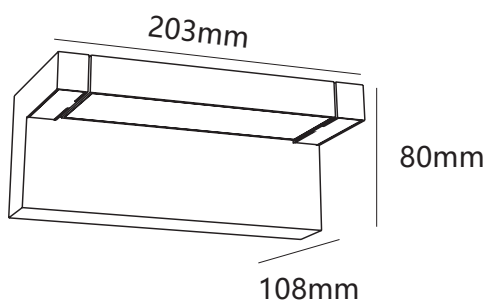


Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0015B	Black	18W	2100Lm	>80	Non-dimmable	3000K	203x80x108mm

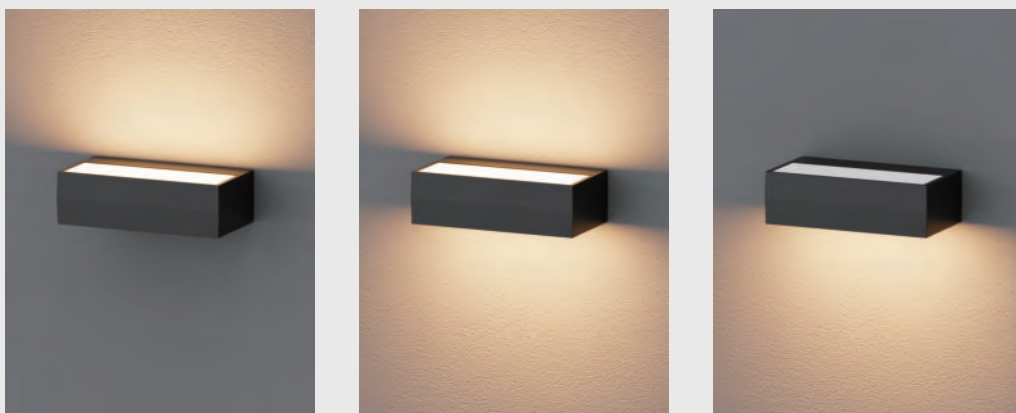


BEAM 0016B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

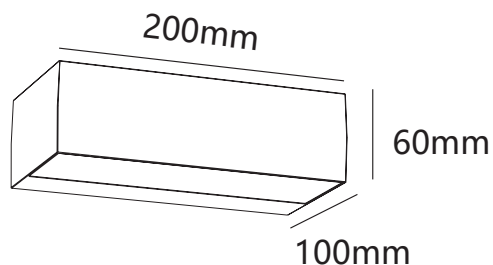

Light distribution adjustable with dip switch:

- up only
- down only
- up and down



CCT dip switch changeable



Gear



Code	Color	Power	Lumen	CRI	Dimmable	CCT	Size
Beam 0016B	Black	10W	800Lm	>80	Non-dimmable	3CCT (2700K-3000K-4000K)	200x100x60mm

IP65

SWITCHABLE LIGHTING





Selecting the preferred lighting direction by slide switch.





BEAM 0640B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

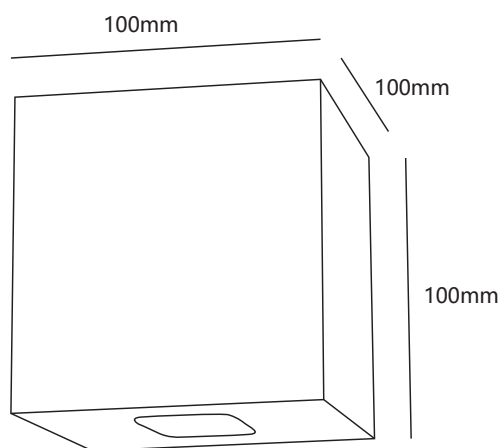


PRODUCT FEATURES

Lifetime: 50,000 hours LM80

Including:
LED Citizen COB
Driver 500mA



TECHNICAL SPECIFICATIONS

Code	Beam 0640B
Fixture color	Black
LxBxH	100x100x100mm
Class	LED
Adjustable	No
Dimmable	No
Power	3W (up or down)
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
Luminous flux	3W: 140Lm
Beam angle	50°
IP	65



BEAM 0641B

DECORATIVE LIGHTING
LED WALL LIGHT OUTDOOR

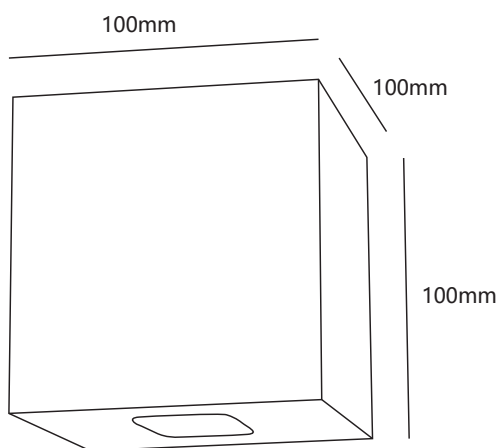

PRODUCT FEATURES

Lifetime: 50,000 hours LM80

Including:
LED Citizen COB
Driver 500mA



TECHNICAL SPECIFICATIONS

Code	Beam 0641B
Fixture color	Black
LxBxH	100x100x100mm
Class	LED
Adjustable	No
Dimmable	No
Power	6W (up/down)
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
Luminous flux	280Lm
Beam angle	50°
IP	65



BEAM 0220

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

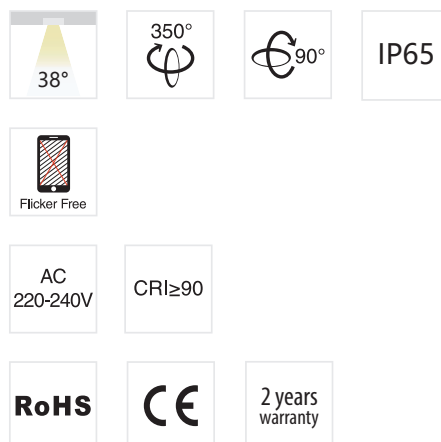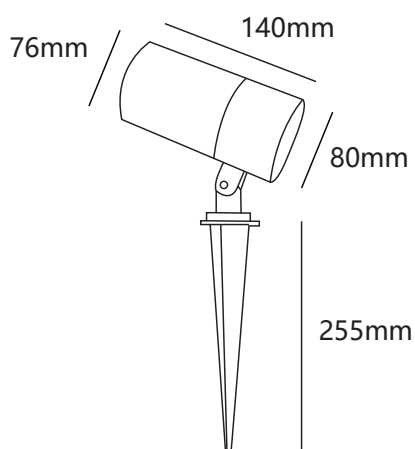

PRODUCT FEATURES

Ground spot with pin
Round
Power cable cast into device
Application area: outdoor lighting
CREE LED


TECHNICAL SPECIFICATIONS

Code	Beam 0220
Fixture color	Black
Diameter	Ø 76mm
Width x height	76x140mm
Pin depth	255mm
Class	LED
Adjustable	Yes
Power	10W
Color temp	3000K
Voltage	220 - 240V 50 - 60Hz
Dimmable	No
Output Lumen	874Lm
Beam angle	38°
IP	65



BEAM 0211

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

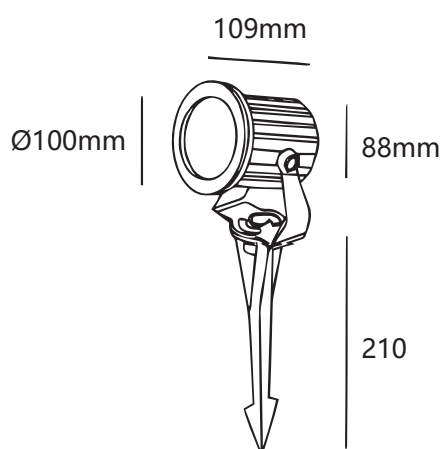

IP65

GU10

AC
220-240V

CE

2 years
warranty



PRODUCT FEATURES

Ground spot with pin
Round
Power cable cast into fixture
Application area: outdoor lighting
Excluding GU10 LED


TECHNICAL SPECIFICATIONS

Code	Beam 0211
Fixture color	Alu brush
Diameter	Ø 100mm
Width x height	88 x 109mm
Pin depth	210mm
Class	LED
Adjustable	Yes
Power	Max. 10W
Voltage	220 - 240V 50 - 60Hz
Fitting	GU10
IP	65



BEAM 0212

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

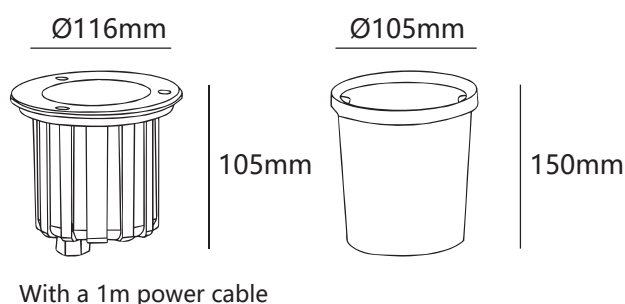

IP67

GU10

AC
220-240V

CE

2 years
warranty



PRODUCT FEATURES

Ground spot (including built - in box)
Round
Power cable (1m) cast into fixture
Application area: outdoor lighting
Excluding GU10 LED

Option:
Frosted glass (Beam 0216)
Transparent glass (Beam 0217)


TECHNICAL SPECIFICATIONS

Code	Beam 0212
Fixture color	Alu brush
D x H ground spot	Ø 116 x 105mm
D x H built - in box	Ø 105 x 150mm
Class	LED
Adjustable	No
Power	Max. 10W
Voltage	220 - 240V 50 - 60Hz
Fitting	GU10
IP	67



BEAM 0213

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

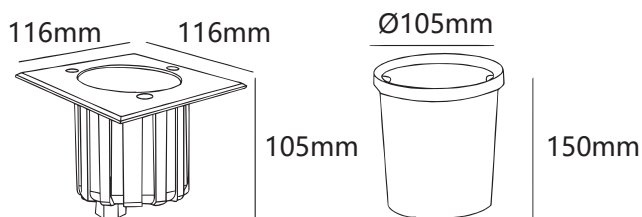

IP67

GU10

AC
220-240V

CE

2 years
warranty



PRODUCT FEATURES

Ground spot (including built - in box)
Square
Power cable cast into fixture
Application area: outdoor lighting
Excluding GU10 LED

Option:
Frosted glass (Beam 0216)
Transparent glass (Beam 0217)



TECHNICAL SPECIFICATIONS

Code	Beam 0213
Fixture color	Alu brush
LxBxH ground spot	116 x 116 x 105mm
D x H built - in box	Ø 105 x 150mm
Class	LED
Adjustable	No
Power	Max. 10W
Voltage	220 - 240V 50 - 60Hz
Fitting	GU10
IP	67



BEAM 0049

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

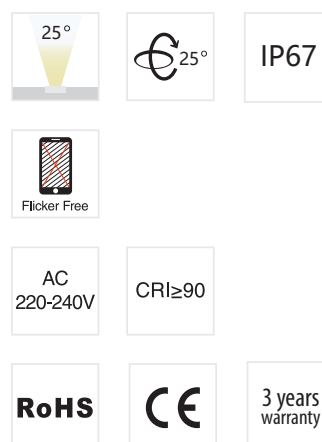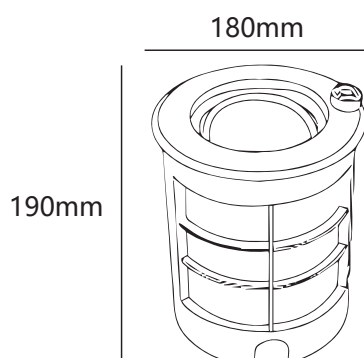

PRODUCT FEATURES

Ground spot (including built - in box)
Round
Power cable cast into fixture
Application area: outdoor lighting
IK08
CRI>80
CREE LED
8mm tempered glass cover
Including LED and driver



TECHNICAL SPECIFICATIONS

Code	Beam 0049
Fixture color	Alu brush
LxBxH ground spot	Ø 180x190mm
D x H built - in box	Ø 170x200mm
Class	LED
Adjustable	Yes (25°)
Power	16W
Output Lumen	1200Lm
Color temp	3000K
Voltage	220 - 240V 50 - 60Hz
Dimmable	No
IP	67



BEAM 0218

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

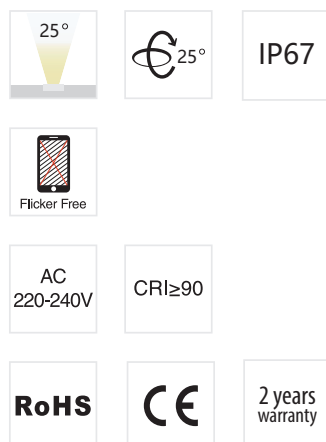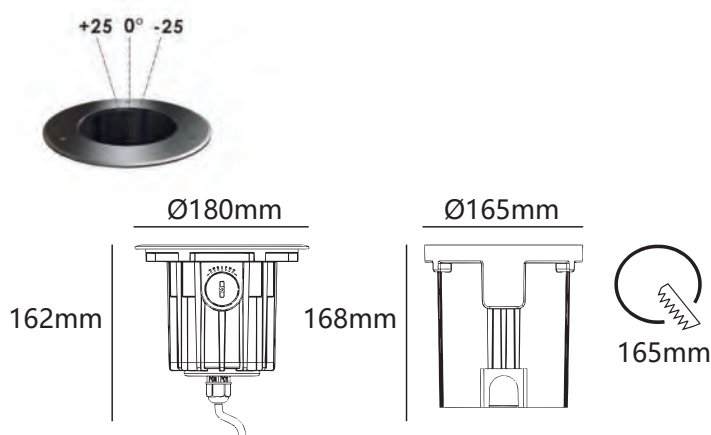

PRODUCT FEATURES

Ground spot (including built - in box)
Round
Power cable cast into fixture
Application area: outdoor lighting
IK08
CRI>80
CREE LED
8mm tempered glass cover
Including LED and driver


TECHNICAL SPECIFICATIONS

Code	Beam 0218
Fixture color	Alu brush
LxBxH ground spot	Ø 180 x 162mm
D x H built - in box	Ø 165 x 168mm
Class	LED
Adjustable	Yes (20°)
Power	18W (9x2W)
Output Lumen	1080Lm
Color temp	3000K
Voltage	220 - 240V 50 - 60Hz
Dimmable	No
IP	67



BEAM S3201-S3207


DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

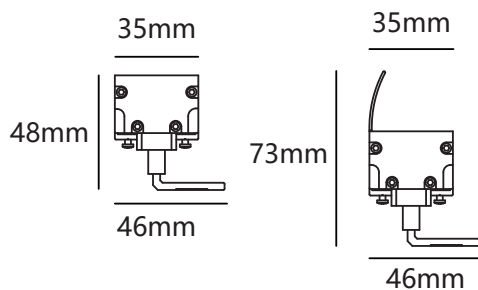

Length and power can be customized


Product Features

I. Scientific waterproof design with an IP67 protection rating. II. Constructed with high-quality 6063 aluminum alloy for efficient heat dissipation, resulting in a lifespan of up to 50,000 hours. III. Utilizes the standard DMX512 protocol with a high grayscale of 65,536, faithfully reproducing material colors without flickering.

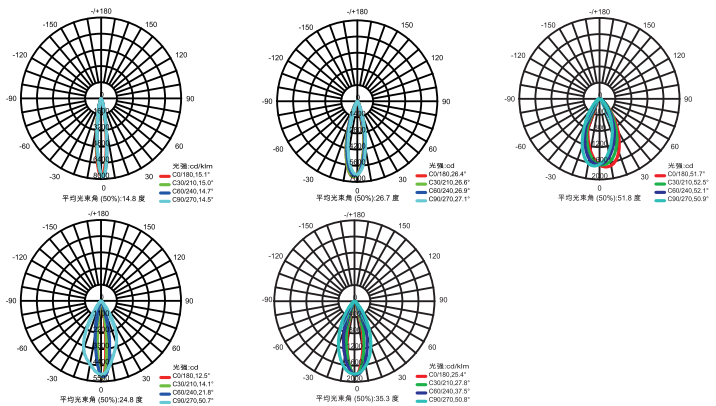


Code	Power	Length	Voltage	CCT	Beam Angle	LED Qty
Beam S3201	18W	1000mm	230Vac	4000K	60°	18 LEDs
Beam S3202	24W	1000mm	230Vac	4000K	60°	24 LEDs
Beam S3203	36W	1000mm	230Vac	4000K	60°	30 LEDs
Beam S3204	18W	1000mm	DC24V	RGB	40°	18 LEDs
Beam S3205	27W	1000mm	DC24V	RGBW	40°	18 LEDs
Beam S3206	24W	1000mm	DC24V	RGB	40°	24 LEDs
Beam S3207	36W	1000mm	DC24V	RGBW	40°	24 LEDs

 This product is a special order item (delivery time of at least 12 weeks)

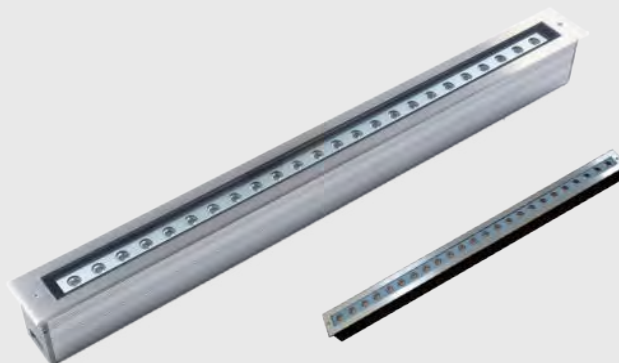

BEAM S3208-S3213

DECORATIVE LIGHTING
LED GROUND LIGHT AND WALL WASHER

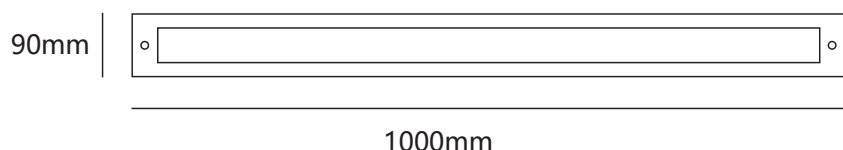

Length and power can be customized

Chip: Bridgelux/CREE
CCT:3000K/4000K/5000K/RGBW
Material: : Stainless Steel 304 Cover+Aluminum Body+Aluminum
Embedded Part+TemperedGlass(clear or frosted)
Input Voltage: 12V/24V/220-240V 50~60Hz



Beam Angle: 30°


Code	Power	Voltage	CCT	Beam Angle	LED Qty
Beam S3208	18W	230Vac	4000K	L1000x90xH105	L985x80xH110
Beam S3209	24W	230Vac	4000K	L1000x90xH105	L985x80xH110
Beam S3210	36W	230Vac	4000K	L1000x90xH105	L985x80xH110
Beam S3211	18W	DC24V	RGBW	L1000x90xH105	L985x80xH110
Beam S3212	24W	DC24V	RGBW	L1000x90xH105	L985x80xH110
Beam S3213	36W	DC24V	RGBW	L1000x90xH105	L985x80xH110



BEAM 0241B

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

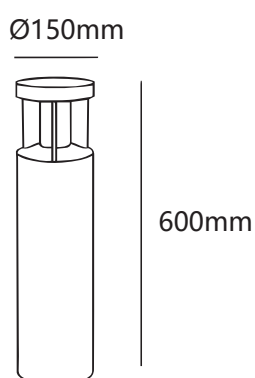

IP54

E27

AC
220-240V

CE

2 years
warranty

PRODUCT FEATURES

Aluminum round garden light
Application area: outdoor lighting
Excluding E27 LED

TECHNICAL SPECIFICATIONS


Code	Beam 0241B
Color	Black
Diameter x height	Ø 90x600mm
Class	LED
Adjustable	No
Power	Max.18W
Voltage	220-240V 50-60Hz
Fitting	E27
IP	54



BEAM 0231B

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

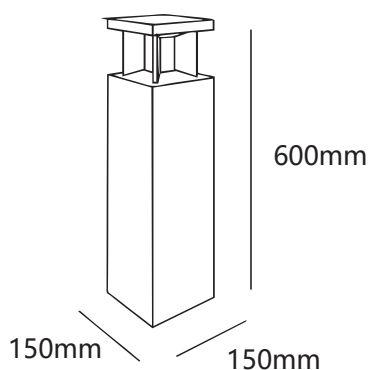

IP54

E27

AC
220-240V

CE

2 years
warranty

PRODUCT FEATURES

Aluminum square garden light
Application area: outdoor lighting
Excluding E27 LED


TECHNICAL SPECIFICATIONS

Code	Beam 0231B
Color	Black
Diameter x height	100x100x600mm
Class	LED
Adjustable	No
Power	Max.18W
Voltage	220-240V 50-60Hz
Fitting	E27
IP	54



BEAM R9004

DECORATIVE LIGHTING
LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

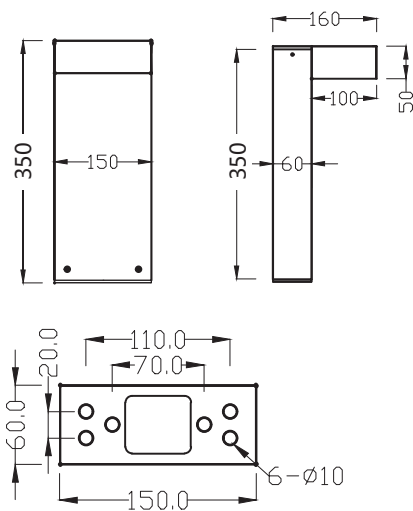


IP65	 Flicker Free	AC 220-240V	CRI≥80	IK08
RoHS	CE	T3 54x135° t50°	2 years warranty	

TECHNICAL SPECIFICATIONS

Code	Beam R9004
Colour	Black
LxWxH	150 x 160 x 350mm
Class	LED
Adjustable	No
Power	10W
Output Lumen	700lm
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
Beam Angle	120°
IP	65

PRODUCT FEATURES

Aluminium garden pole
Application: outdoor lighting
Including LED and Driver
CREE COB LED

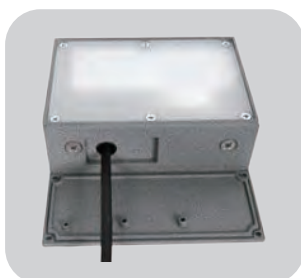

Detachable head



Die casting inner base



Injection opal & frosted diffuser




LED lens options



BEAM R9005

DECORATIVE LIGHTING
LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

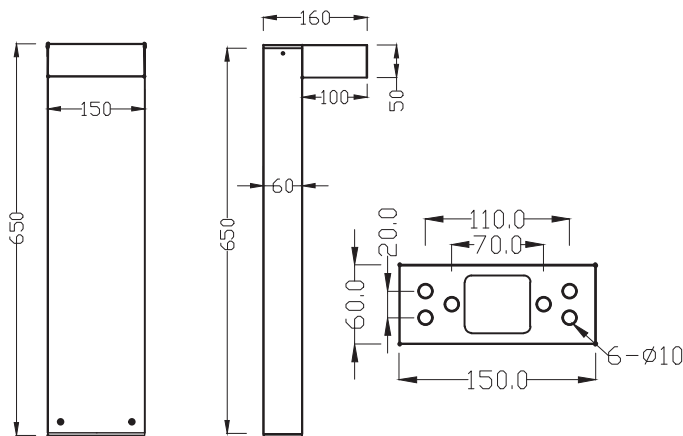


IP65	Flicker Free	AC 220-240V	CRI≥80	IK08
RoHS		T3 54x135° t50°	2 years warranty	

TECHNICAL SPECIFICATIONS

Code	Beam R9005
Colour	Black
L×W×H	150 x 160 x 650mm
Class	LED
Adjustable	No
Power	10W
Output Lumen	700lm
Voltage	220 - 240V 50 - 60Hz
CCT	3000K
Beam Angle	120°
IP	65

PRODUCT FEATURES

Aluminium garden pole
Application: outdoor lighting
Including LED and Driver
CREE COB LED



Detachable head



Die casting inner base



Injection opal & frosted diffuser



LED lens options



Detachable head



Die casting inner base



Injection opal & frosted
diffuser




LED lens options

BEAM S9008

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

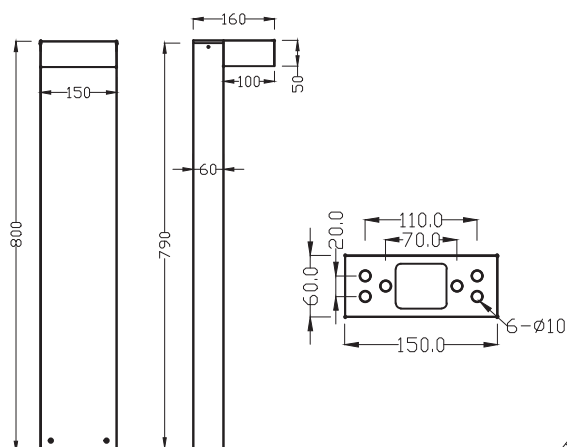

IP65




Flicker Free

AC
220-240V

CRI≥80

IK08

RoHS



TYPE II







Screwless
fast connection

Code	Color	Power	Lumen	CRI	CCT
Beam S9008	Black	15W	1500Lm	>80	3000K



BEAM S6015

DECORATIVE LIGHTING
LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

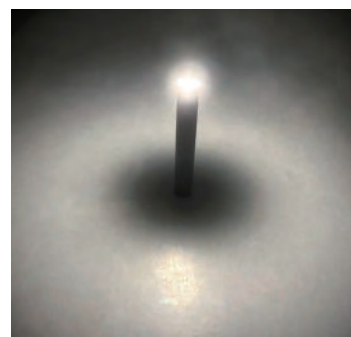
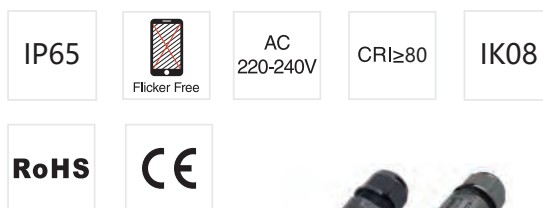
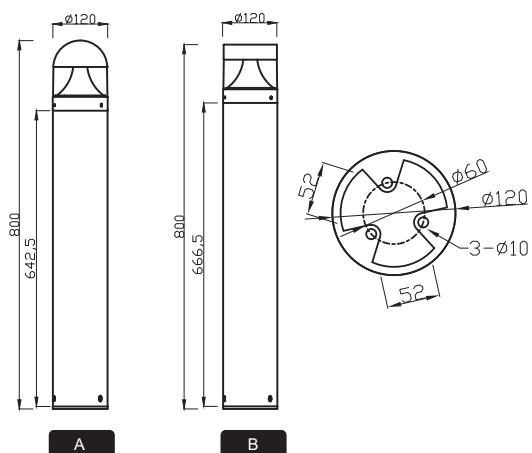


Code	LED	Power	Lumen	CRI	CCT
Beam S6015	Lumileds 2835	15W	1050Lm	>80	3000K



BEAM S6014

DECORATIVE LIGHTING
LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

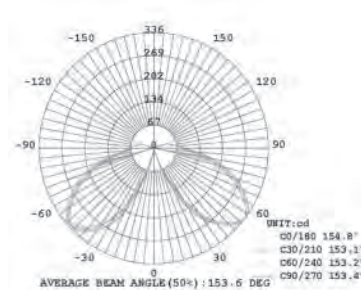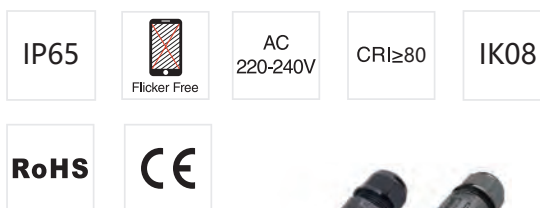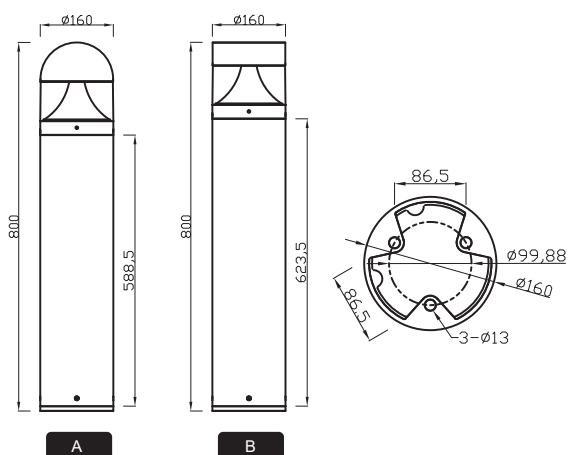



Code	LED	Lumen	Power	CCT	CRI
Beam S6014	Lumileds 2835	1672Lm	24W	3000K	≥80



BEAM S6003

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

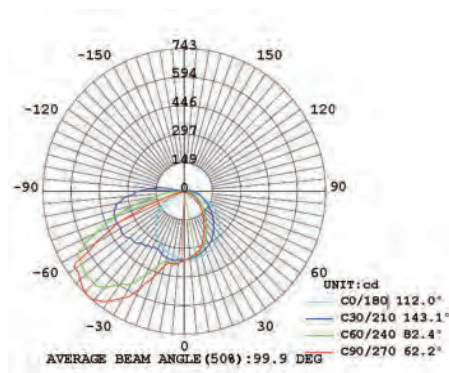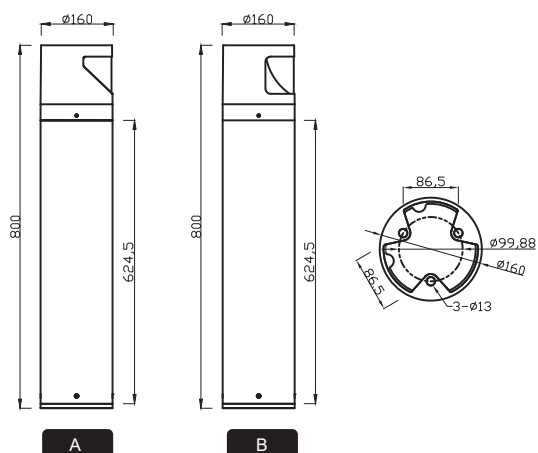




Code	LED	Lumen	Power	CCT	CRI
Beam S6003	Lumileds 2835	1535Lm	20W	3000K	≥80



BEAM S6002

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

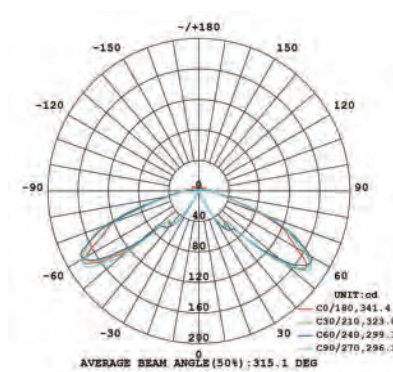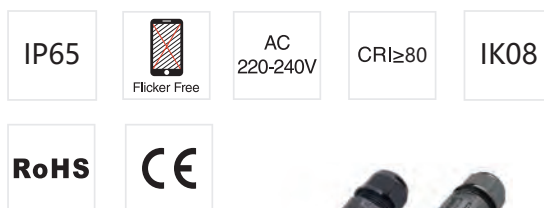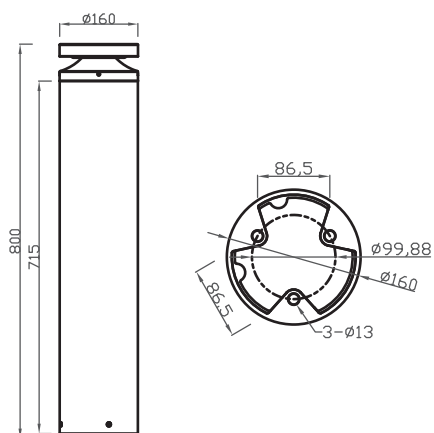




Code	LED	Lumen	Power	CCT	CRI
Beam S6002	Lumileds 2835	1200Lm	20W	3000K	≥80



BEAM S6017

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

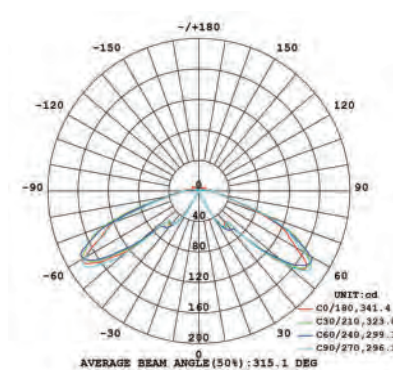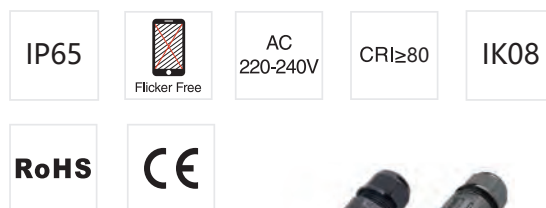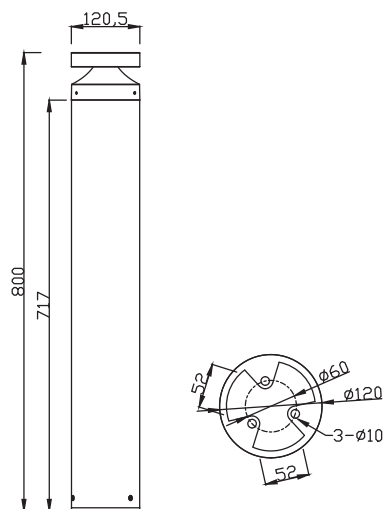

Code	LED	Lumen	Power	CCT	CRI
Beam S6017	Lumileds 2835	1600Lm	15W	3000K	≥80



Heatsink part



LED driver



Injection PC diffuser




Whole removable head

BEAM S6001

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

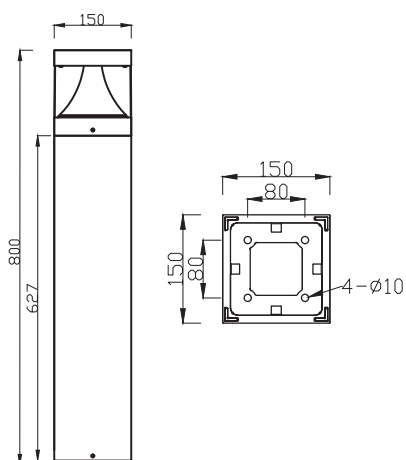

IP65



Flicker Free

AC
220-240V



CRI≥80

IK08


RoHS



Screwless
fast connection






Code	LED	Lumen	Power	CCT	CRI
Beam S6001	Lumileds 2835	2400Lm	20W	3000K	≥80

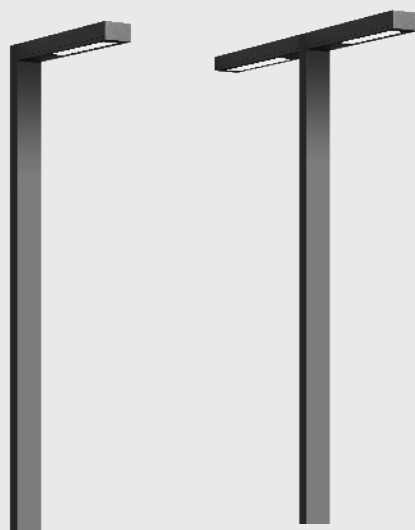

BEAM S6004/S6005


INDUSTRIAL LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT

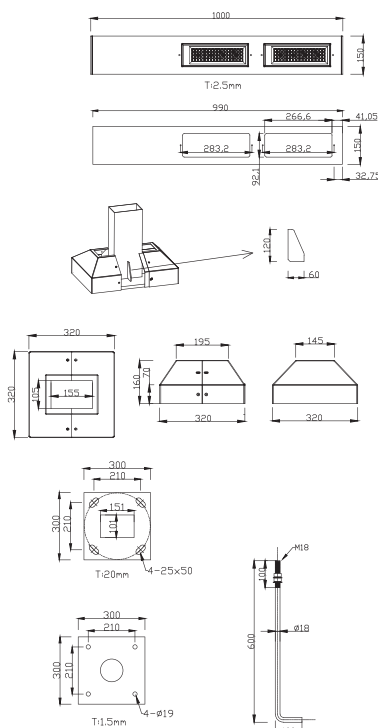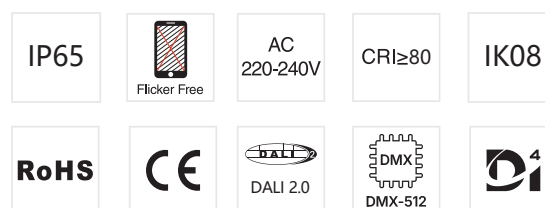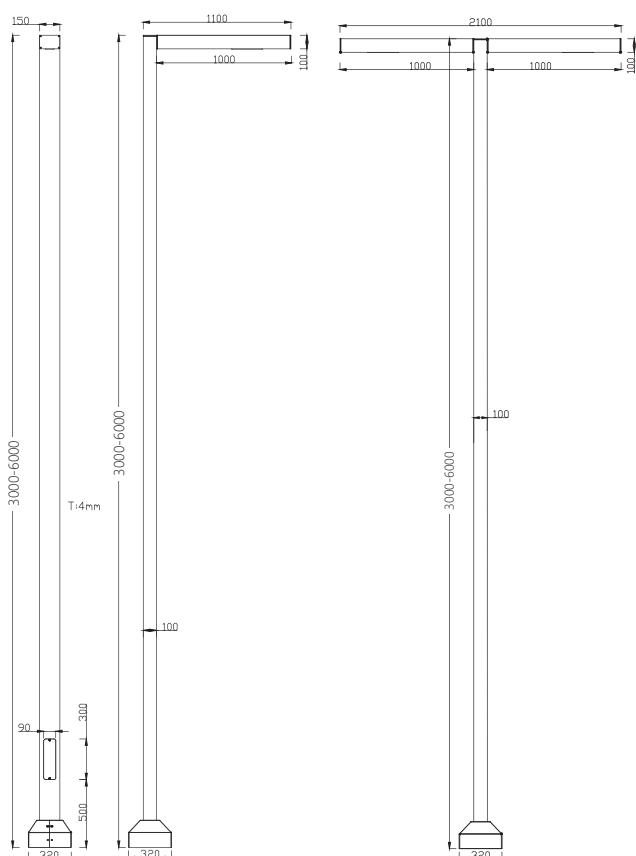

S This product is a special order item (delivery time of at least 12 weeks)

Distribution:

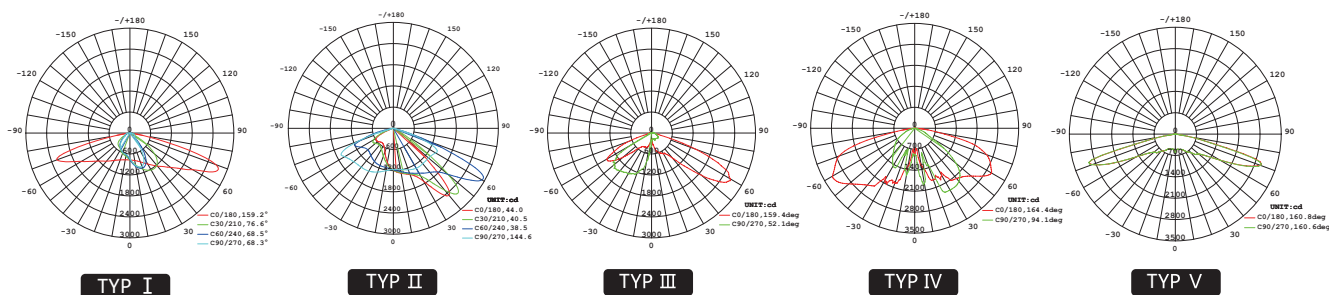

Features:

- Main body is made of Die casting aluminum alloy and Extruded aluminum alloy.
- The diffuser is a clear anti-UV polycarbonate lens for high efficiency and vandal resistance.
- Lumileds 3030 led chip and Meanwell driver as regular, Sosen, Philips driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.
- Warranty is 3-5 years.

Code	LED	Lumen	Power	CCT	CRI
Beam S6004	Lumileds 3030	110-140Lm/W	30-120W	2700-6500K	≥80
Beam S6005	Lumileds 3030	110-140Lm/W	2x30-120W	2700-6500K	≥80



BEAM S3129

Beam S3129 has a discreet design with uniform lighting. Its upper housing and PC diffuser are well integrated, which can eliminate blind spots caused by luminaire arms, and it emits a pleasant, non-glary, soft glow.





High-transparency PC diffuser creates a tidy impression.




Two versions are optional, indirect lighting visual comfort and direct lighting achieve high efficacy.



Power & CCT selectable minimize SKU but maximize versatility.


Power Selectable



CCT Selectable



INDUSTRIAL LIGHTING

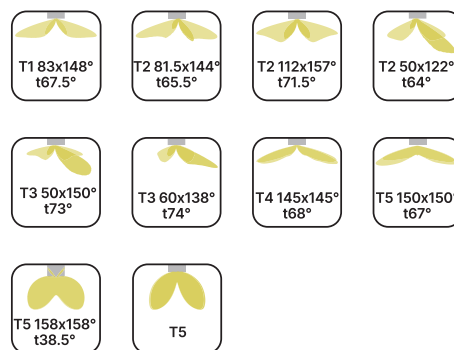

CTT ON REQUEST

Code	Watt	Efficacy(Ra70)	Lumen(±10%)	N.W/pc(kgs)	Size(DxHmm)
BEAM S3129-020	20W	115lm/w or 135lm/W	1,500lm or 2,700lm	4.6	Ø371x420
BEAM S3129-040	40W	115lm/w or 145lm/W	4,500lm or 5,400lm	4.6	Ø371x420
BEAM S3129-060	60W	115lm/w or 145lm/W	6,900lm or 8,100lm	4.6	Ø371x420
BEAM S3129-020A	20W	75lm/W	1,500lm	4.6	Ø371x420
BEAM S3129-040A	30W	75lm/W	3,000lm	4.6	Ø371x420

PRICE AVAILABLE ON REQUEST

 This product is a special order item
(delivery time of at least 12 weeks)



BEAM 9006-1W BEAM 9006-2W

DECORATIVE LIGHTING

LED BOLLARD LIGHT - PILLAR LIGHT - GARDEN LIGHT



	IP65	AC 220-240V	PF≥0.9	CRI≥80	2 years warranty
--	-------------	----------------	--------	--------	---------------------

PRODUCT FEATURES

LED String Light
10m black cable with plug
20 E27 LED lamps, 1W or 2W included
Lamp in unbreakable safety plastic
Application: outdoor lighting
With through plug

TECHNICAL SPECIFICATIONS

Code	Beam 9006-1W / 9006-2W
Class	LED
Power	20W (20x1W) or 40W (20x2W)
Colour	2700K
Voltage	220 - 240V 50 - 60Hz
Dimmable	No
IP	65

VERSIONS


BEAM 9006 - 1W
BEAM 9006 - 2W



SIRIUS SPORT LIGHTING

- ◆ Toggle clamps on driver box. Tool-free operation and easier maintenance.
- ◆ GOYAOne-size Screws for all adjustment
Same size of L shape screw driver to turn modules up and down. Left and right, quick module setting
- ◆ No exposed wires



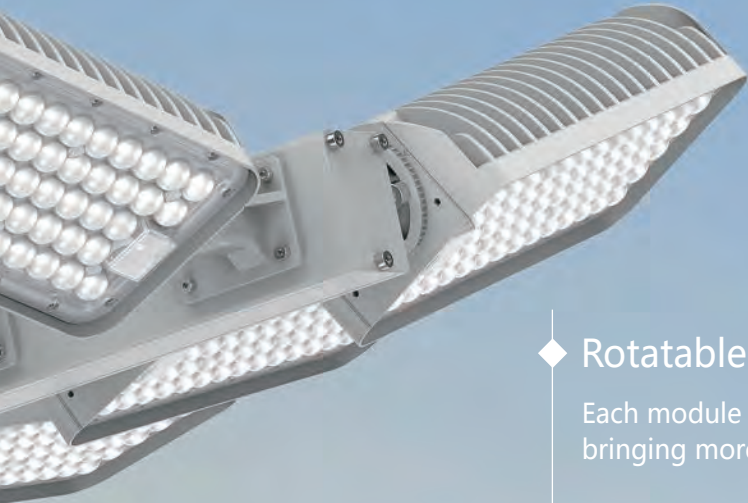

◆ Rotatable Modular Design

Each module can be rotated vertically 80°+ horizontally 180°, bringing more flexible lighting solutions and more precise light targeting.

◆ Anti-glare and Obtrusive Light Control

Applying full package of anti-glare & obtrusive light control system, ensure light pollution and energy consumption is minimized at the same time.

◆ Patented Angle Ruler Sight

Patented angle ruler sight helps modules with asymmetric lenses targeting to specified points on sports field, quick module setting

◆ Patented Aiming Lines

Design the Aiming line on module sides, helps to calibrate the modules installation direction without holding any other tool on hands. Easiest and simplest way to make sure the light modules aiming the target direction as planned




SIRIUS 720W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
SIRIUS-720W Symmetrical	720W	170LM/W	122400LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

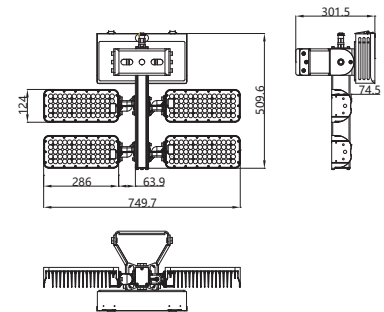

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Vertically 80°+Horizontally180°
CRI	70	Wattage/Module	Symmetrical:180W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Aluminum	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Spill cover Separated driver Box DALI 2, D4i, DMX dimmable Color temp 3000K, 4000K


SIRIUS 1080W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
SIRIUS-1080W Symmetrical	1080W	170LM/W	183600LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

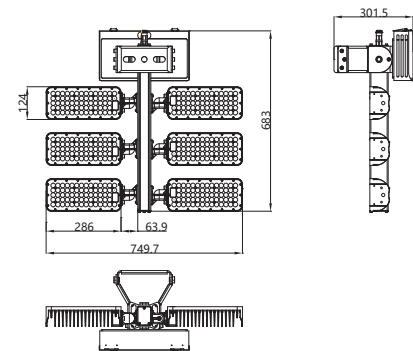

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Vertically 80°+Horizontally180°
CRI	70	Wattage/Module	Symmetrical:180W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Aluminum	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Spill cover Separated driver Box DALI 2, D4i, DMX dimmable Color temp 3000K, 4000K


SIRIUS 1440W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
SIRIUS-1440W Symmetrical	1440W	170LM/W	244800LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

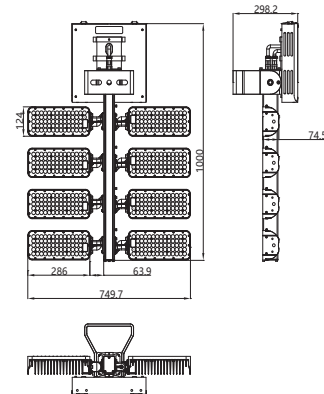

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Vertically 80°+Horizontally180°
CRI	70	Wattage/Module	Symmetrical:180W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Aluminum	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Spill cover Separated driver Box DALI 2, D4i, DMX dimmable Color temp 3000K, 4000K


SIRIUS 1800W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
SIRIUS-1800W Symmetrical	1800W	170LM/W	306000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

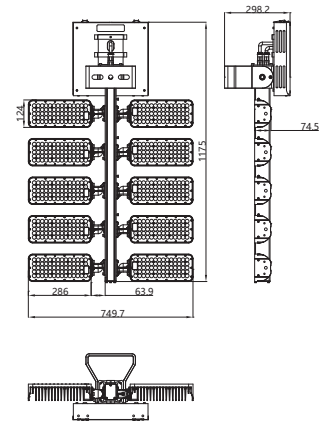

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Vertically 80°+Horizontally180°
CRI	70	Wattage/Module	Symmetrical:180W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Aluminum	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Spill cover Separated driver Box DALI 2, D4i, DMX dimmable Color temp 3000K, 4000K



VEGA

LED SPORTS LIGHTING

Rotatable Modular Design

Each module can be rotated horizontally 15°, bringing more flexible lighting solutions and more precise light targeting.

Protection Mesh Cover on Back

Always keep the lamp clean from the bird droppings or leaves or other dirt, thereby ensuring the perfect heat dissipation performance and long lifespan of the lamps.

Anti-glare and Obtrusive Light Control

Applying full package of anti-glare & obtrusive light control system, ensure light pollution and energy consumption is minimized at the same time.

Pole Mounted Way Available for 150W to 540W

No exposed wires

Integrative Driver Box Solution

- easier and quicker operation
- safer and more money-saving installation
- more reliable performance
- simpler and economical maintenance




VEGA 150W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -150W Symmetrical	150W	170LM/W	25500LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

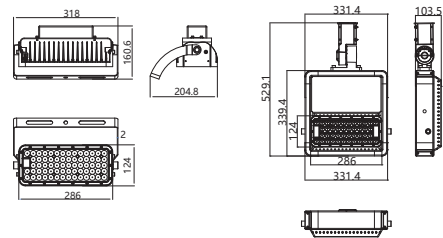

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: [Wireless Control](#) [DALI 2, D4i, DMX dimmable](#) [Color temp: 3000K 4000K](#) [Pole mounting bracket](#)



S This product is a special order item
(delivery time of at least 12 weeks)


VEGA 300W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -300W Symmetrical	300W	170LM/W	51000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed

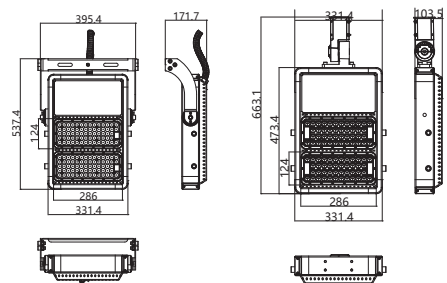

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: [Wireless Control](#) [DALI 2, D4i, DMX dimmable](#) [Color temp: 3000K 4000K](#) [Pole mountting bracket](#)



VEGA 450W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -450W Symmetrical	450W	170LM/W	76500LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: [Wireless Control](#) [DALI 2, D4i, DMX dimmable](#) [Color temp: 3000K 4000K](#) [Pole mountting bracket](#)



This product is a special order item
(delivery time of at least 12 weeks)


VEGA 600W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -600W Symmetrical	600W	170LM/W	102000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed

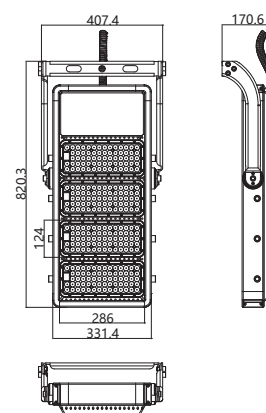

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Wireless Control DALI 2, D4i, DMX dimmable Color temp: 3000K 4000K Pole mountting bracket



This product is a special order item
(delivery time of at least 12 weeks)

VEGA 750W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -750W Symmetrical	750W	170LM/W	127500LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: [Wireless Control](#) [DALI 2, D4i, DMX dimmable](#) [Color temp: 3000K 4000K](#) [Pole mountting bracket](#)



This product is a special order item
(delivery time of at least 12 weeks)


VEGA 900W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -900W Symmetrical	900W	170LM/W	153000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed

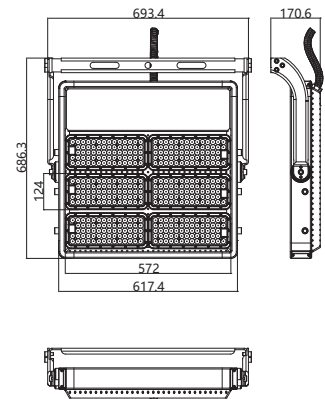

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Wireless Control DALI 2, D4i, DMX dimmable Color temp: 3000K 4000K Pole mountting bracket



 This product is a special order item
(delivery time of at least 12 weeks)


VEGA 1200W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA -1200W Symmetrical	1200W	170LM/W	204000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed



SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless s steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Wireless Control DALI 2, D4i, DMX dimmable Color temp: 3000K 4000K Pole mountting bracket



S This product is a special order item
(delivery time of at least 12 weeks)


VEGA 1500W

Sports Lighting



	WATTAGE	LUMEN EFFICIENCY	LUMEN OUTPUT
VEGA-1500W Symmetrical	1500W	170LM/W	255000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed

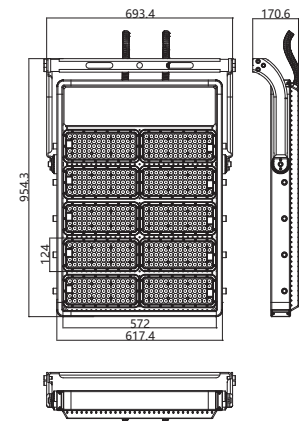

SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Rotatable Modular Design	Horizontally15°
CRI	70	Wattage/Module	150W
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	0-10V Dimming
Power Factor	>0.95	CCT Standard	5000K
Warranty	5 Yrs Warranty	Wireless Control	Available
IP Rate	IP66	Beam Angle	20°,40°,60°
Bracket	Stainless steel	Driver	INVENTRONICS
IK Rate	IK08	Windload Test	17 class windload(56.1-61.2m/s,240kg/square meter)
L70 Hour	>100.000h		

Options: Wireless Control DALI 2, D4i, DMX dimmable Color temp: 3000K 4000K Pole mountting bracket



 This product is a special order item
(delivery time of at least 12 weeks)

◆ Rotatable Installation Bracket

Bracket can be rotated by 120°
easier to adjust the lamp angle during the installation

◆ Light Spill Cover

To control the light pollution better, especially
needed when lamps are
applied near the airport etc.

◆ Wireless Entertainment System

Wireless Entertainment System is designed to
provide an amazing audio and visual experience to all
players and fans. Millions of different colors changing
effects synchronized to music beats can be
simply wirelessly set up on your phone or PC.

◆ Detachable driver box and Plug & Play connection System

You can easily install the drivers in electrical driver
boxes on the bottom of the pole by the quick connection
plug. Super convenient for both installation and maintenance.

◆ High Lumen Output

Using High efficiency Lumileds 5050 Chips, output efficiency
150lm/w at highest, much more energy saving.

◆ Die-casting Heatsink

Durable and no moving parts





REGULUS SERIES

SPORTS LIGHTING



REGULUS 300/400W

Sports Lighting



IP65 IK08 CE



Plug and Play
connecting Cable




Laser Pen



20KV SPD

	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
REGULUS-300W	300W	150LM/W	45000LM
REGULUS-400W	400W	150LM/W	60000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed



SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	L70 Hour	> 100.000h
CRI	70	Wattage/Module	150w
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	ON/OFF
Power Factor	>0.95	CCT Standard	5000k
Warranty	5 Yrs Warranty		
IP Rate	IP65	Beam Angle	30°, 60°, 90°,
Driver Box	Detachable	Driver	Meanwell
Bracket	Iron or Stainless Steel	Wind load	17class Wind load(56.1-61.2m/s)

REGULUS 600/700/800W

Sports Lighting



IP65 IK08 CE



Plug and Play
connecting Cable




Light Spill Cover



Protection Shield

	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
REGULUS-600W	600W	150LM/W	90000LM
REGULUS-700W	700W	150LM/W	105000LM
REGULUS-800W	800W	150LM/W	120000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed



SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	L70 Hour	> 100.000h
CRI	70	Wattage/Module	150w
Operating Temp	-40°C To 55°C	Dimming Solutions Standard	ON/OFF
Power Factor	>0.95	CCT Standard	5000k
Warranty	5 Yrs Warranty		
IP Rate	IP65	Beam Angle	30°, 60°, 90°,
Driver Box	Detachable	Driver	Meanwell
Bracket	Iron or Stainless Steel	Wind load	17class Wind load(56.1-61.2m/s)

RIGEL SERIES

GENERAL OUTDOOR LIGHTING



High Lumen Efficiency

With durable Lumileds 5050 chips, G2 series can reach up to 160lm/w lumen output. More energy can be saved, be better on eco-friendliness.



Rotatable Modular Design

Each module can be rotated by $\pm 40^\circ$, bring a more flexible lighting application and more precise target lighting. One lamp is enough for a wider area lighting. Installation bracket can be also rotated by 120° . Easy and fast for installation



Multifunctional Application

ROTAR Series can be widely used as floodlight, stadium light, high mast light on different application like parking lot, indoor or outdoor sports course, highway, construction site.






RIGEL 120W

General Outdoor Lighting



IP65 IK08 CE

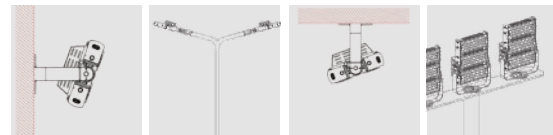

	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
RIGEL-120W	120W	150LM/W	18000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

SPECIFICATIONS


	1	Housing	Aluminum
Module Qty			
Input Voltage	AC90-305V/AC108-528V	Rotatable Modular Design	Vertically Rotatable Modules
Led Brand	Lumileds 5050	Wattage/module	120W
CRI	70	Dimming Solutions Standard	0-10v Dimming
Operating Temp	-40°C To 55°C	CCT Standard	5000K
Power Factor	>0.95		
Warranty	5 Yrs Warranty	Beam Angle	20°,40°,60°,90,H140°*V100
IP Rate	IP65	Accessories	Pole intallation Adptor; Driver Box; Wall Mounted Bracket;
Driver Box	Detachable	Driver	Meanwel
Housing color	Black	Wind Load	17class Wind Load(56.1-61.2m/s)
L70 Hour	>100.000h	Bracket	Iron or Stainless Steel

RIGEL 240W

General Outdoor Lighting



IP65 IK08 CE



	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
RIGEL-240W	240W	150LM/W	36000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed

SPECIFICATIONS


Module Qty	2	Housing	Aluminum
Input Voltage	AC90-305V/AC108-528V	Rotatable Modular Design	Vertically Rotatable Modules
Led Brand	Lumileds 5050	Wattage/module	120W
CRI	70	Dimming Solutions Standard	0-10v Dimming
Operating Temp	-40°C To 55°C	CCT Standard	5000K
Power Factor	>0.95		
Warranty	5 Yrs Warranty	Beam Angle	20°,40°,60°,90,H140*V100
IP Rate	IP65	Accessories	Pole intallation Adptor; Driver Box; Wall Mounted Bracket;
Driver Box	Detachable	Driver	Meanwel
Housing color	Black	Wind Load	17class Wind Load(56.1-61.2m/s)
L70 Hour	>100.000h	Bracket	Iron or Stainless Steel

RIGEL 360W

General Outdoor Lighting




IP65 IK08 CE



	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
RIGEL-360W	360W	150LM/W	54000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

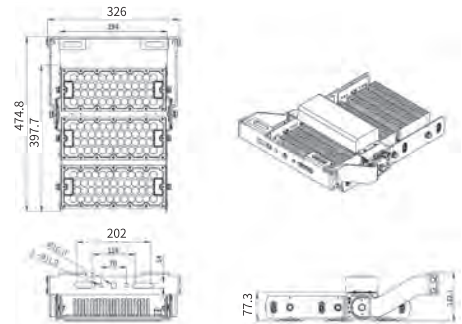

SPECIFICATIONS

Module Qty	3	Housing	Aluminum
Input Voltage	AC90-305V/AC108-528V	Rotatable Modular Design	Vertically Rotatable Modules
Led Brand	Lumileds 5050	Wattage/module	120W
CRI	70	Dimming Solutions Standard	0-10v Dimming
Operating Temp	-40°C To 55°C	CCT Standard	5000K
Power Factor	>0.95		
Warranty	5 Yrs Warranty	Beam Angle	20°,40°,60°,90,H140°*V100
IP Rate	IP65	Accessories	Pole intallation Adptor; Driver Box; Wall Mounted Bracket;
Driver Box	Detachable	Driver	Meanwel
Housing color	Black	Wind Load	17class Wind Load(56.1-61.2m/s)
L70 Hour	>100.000h	Bracket	Iron or Stainless Steel


 This product is a special order item
(delivery time of at least 12 weeks)

RIGEL 480W

General Outdoor Lighting




IP65 IK08 CE

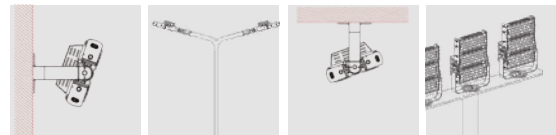

	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
RIGEL-480W	480W	150LM/W	72000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

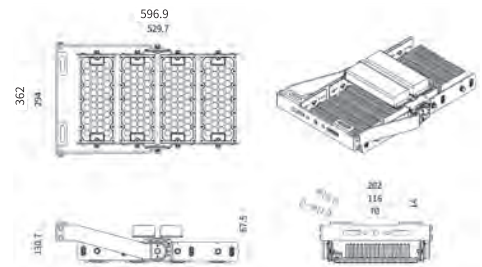

SPECIFICATIONS

Module Qty	4	Housing	Aluminum
Input Voltage	AC90-305V/AC108-528V	Rotatable Modular Design	Vertically Rotatable Modules
Led Brand	Lumileds 5050	Wattage/module	120W
CRI	70	Dimming Solutions Standard	0-10v Dimming
Operating Temp	-40°C To 55°C	CCT Standard	5000K
Power Factor	>0.95		
Warranty	5 Yrs Warranty	Beam Angle	20°,40°,60°,90°,H140°*V100
IP Rate	IP65	Accessories	Pole intallation Adptor; Driver Box; Wall Mounted Bracket;
Driver Box	Detachable	Driver	Meanwel
Housing color	Black	Wind Load	17class Wind Load(56.1-61.2m/s)
L70 Hour	>100.000h	Bracket	Iron or Stainless Steel


 This product is a special order item
(delivery time of at least 12 weeks)

RIGEL 720W

General Outdoor Lighting



IP65 IK08 CE

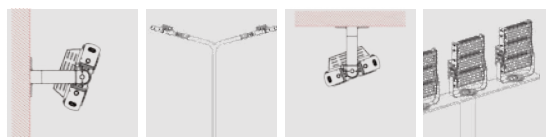

	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
RIGEL-720W	720W	150LM/W	108000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific data if needed

SPECIFICATIONS


Module Qty	6	Housing	Aluminum
Input Voltage	AC90-305V/AC108-528V	Rotatable Modular Design	Vertically Rotatable Modules
Led Brand	Lumileds 5050	Wattage/module	120W
CRI	70	Dimming Solutions Standard	0-10v Dimming
Operating Temp	-40°C To 55°C	CCT Standard	5000K
Power Factor	>0.95		
Warranty	5 Yrs Warranty	Beam Angle	20°,40°,60°,90,H140°V100
IP Rate	IP65	Accessories	Pole intallation Adptor; Driver Box; Wall Mounted Bracket;
Driver Box	Detachable	Driver	Meanwel
Housing color	Black	Wind Load	17class Wind Load(56.1-61.2m/s)
L70 Hour	>100.000h	Bracket	Iron or Stainless Steel

RIGEL 960W

General Outdoor Lighting



IP65 IK08 CE



	SYSTEM WATTAGE	LM/W	LUMEN OUTPUT
RIGEL-960W	960W	150LM/W	144000LM
remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed			

SPECIFICATIONS

Module Qty	8	Housing	Aluminum
Input Voltage	AC90-305V/AC108-528V	Rotatable Modular Design	Vertically Rotatable Modules
Led Brand	Lumileds 5050	Wattage/module	120W
CRI	70	Dimming Solutions Standard	0-10v Dimming
Operating Temp	-40°C To 55°C	CCT Standard	5000K
Power Factor	>0.95		
Warranty	5 Yrs Warranty	Beam Angle	20°,40°,60°,90°,H140°*V100
IP Rate	IP65	Accessories	Pole intallation Adptor; Driver Box; Wall Mounted Bracket;
Driver Box	Detachable	Driver	Meanwel
Housing color	Black	Wind Load	17class Wind Load(56.1-61.2m/s)
L70 Hour	>100.000h	Bracket	Iron or Stainless Steel



ALPHA SPORT LIGHTING



INTRODUCTION

Innovative rotatable module makes more flexible and efficient light distributions. Focus Series lamp covers the function of both flood light and high bay. Anodized aluminum modules, stainless steel screws and powder-coated stainless steel holders and bracket make the whole lamp anticorrosive without cracking or peeling. Finlike heatsink design provides perfect heat management and improves working lifetime. Modular design not only allows easy assembly and maintenance but also provides flexibility of power consumption. The viewing angle of modules is -40 to 40 degree. Fixing angle of lamp ranges from -40 to 40 degree,



SPECIFICATIONS

Input Voltage	AC90-305V/AC108-528V	Housing	Aluminum
LED Brand	Lumileds 5050	Bracket	Iron or Stainless Steel
CRI	70 80 90	Driver	Meanwell, Sosen, inventronics
Operating Temp	-40°C to 60°C	CCT	2700 K to 6500 K
Power Factor	>0.95	Wireless Control	Available
Warranty	5 yrs warranty	Beam Angle	15,30x70,40,49x21,60, 90,136x70
IP Rate	IP65	Housing color	Gray or Black
L70 Hour	>60,000 H	wattage/module	50W
Wind Load	Can stand 17 Class Wind load(56.1~61.2 m/s)		
Dimming Solutions	1~10Vdc/10VPWM signal/resistance/Timer dimming		

MODEL	ALPHA-50W	ALPHA-100W	ALPHA-150W	ALPHA-200W	ALPHA-300W	ALPHA-400W	ALPHA-500W	ALPHA-600W
MODEL QTY	1	2	3	4	6	8	10	12
POWER	50W	100W	150W	200W	300W	400W	500W	600W
LUMEN OUTPUT	6750LM	13500LM	20250LM	27000LM	49500LM	54000LM	67500LM	81000LM

remark: lumen output vary by the beam angles, CCT, CRI, etc, please contact us to get more specific date if needed

 This product is a special order item
(delivery time of at least 12 weeks)

● High-quality LED Chips and Driver

As the two most important parts of LED lamps, G1 series floodlight also adopting the high-quality brand for the chips and drivers.

Lumileds 5050 Chips and Meanwell HLG driver is our standard version. Customized version can be made after the quality evaluation

● Detachable driver box and Plug & Play connection System

You can easily install the drivers in SOGA electrical driver boxes on the bottom of the pole by the quick connection plug. Super convenient for both installation and maintenance.

● Rotatable Modular Design

Each module can be +40° rotated. More flexible lighting application and wider lighting area by one lamp. Much higher uniformity compare with normal floodlight

Wireless Entertainment System



ROTAR Wireless Entertainment System is designed to provide an amazing audio and visual experience to all players and fans. Millions of different colors changing effects synchronized to music beats can be simply wirelessly set up on your phone or PC.



Cover Full Range of Power from 50W to 500W


50W per module, G1 series vary from 50w to 500W, can meet most general outdoor lighting need, like billboard lighting, building wall, area lighting, parking lot, indoor sport court, construction site etc.

6063 Aluminum Heatsink and Stainless Steel Bracket

Great performance heat dissipation, makes sure the lifespan of lamps will last longer. Stainless steel bracket is anti-corrosion, can be freely used in rugged environment, like the seaport

Rotatable Modular Design

INDUSTRIAL LIGHTING

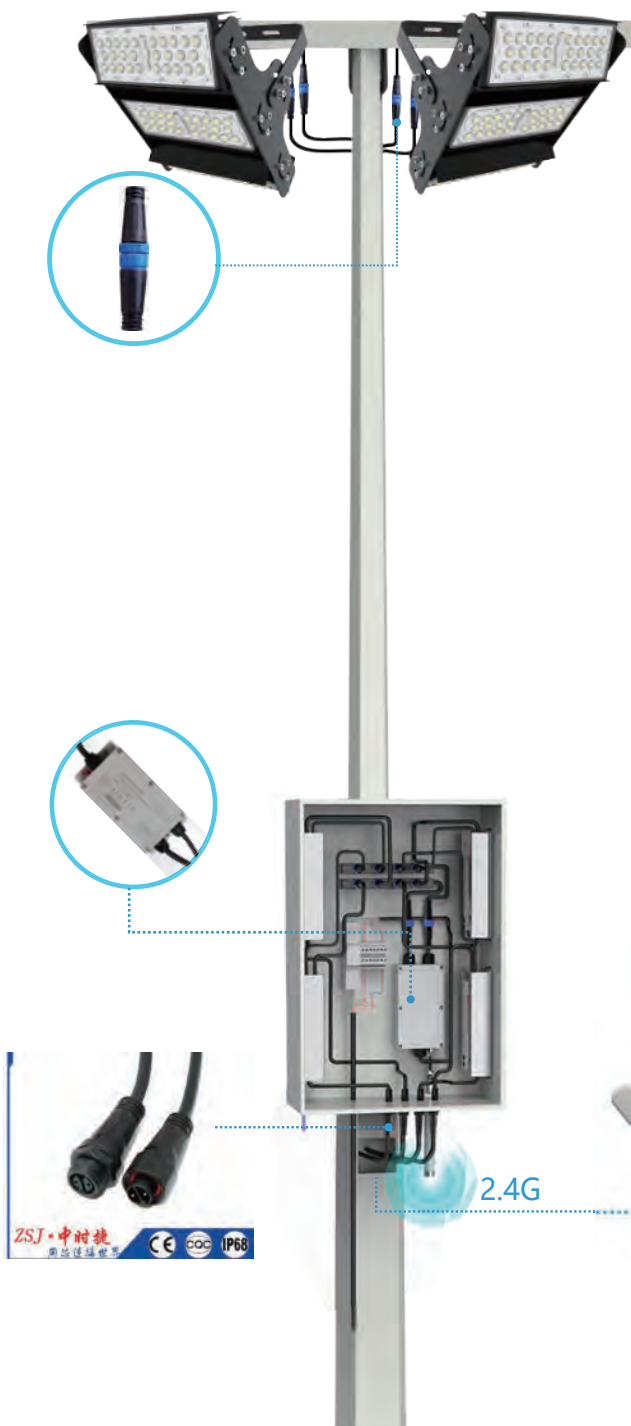

ROTAR Complete Wireless Control Solution is designed to provide our clients not only a smart lighting solution but also a streamlined installation, trouble-free operation, and long-term reliability on the stadium projects. The innovative wireless control system is coupled with our plug & play connection system, integrative driver box solution, we strive for bringing you a complete one-step support on each step of your way.

1. Smarter and Faster Controls
2. Easier and Quicker Operation
3. Safer and more money-saving installation
4. More Reliable performance
5. Simpler and economical maintenance



OPTIONAL ACCESSORIES

INDUSTRIAL LIGHTING




20KV SPD



Zigbee Gateway




Zigbee Controller




Zigbee Wall Switch 360° rotatable installation plate




PRODUCT SIZE




ALPHA-50W




ALPHA-100W




ALPHA-150W

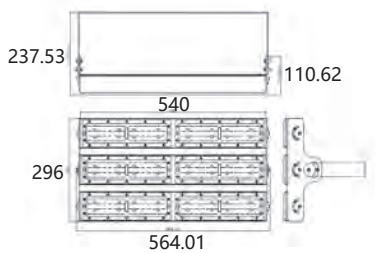


ALPHA-300W




ALPHA-A-200W




ALPHA-B-200W

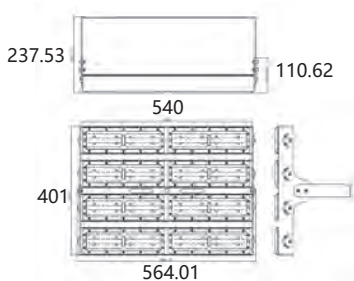

ALPHA-400W



ALPHA-500W

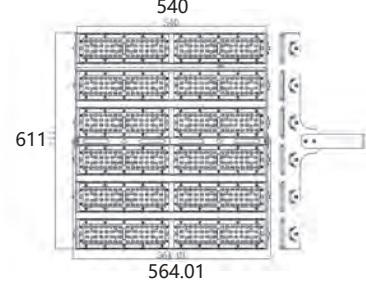

ALPHA-600W

ALPHA--50W	297-300	Beam 0036B	130	Beam 0350B	129	Beam 0640B	242
ALPHA--100W	297-300	Beam 0036W	130	Beam 0350W	129	Beam 0641B	243
ALPHA--150W	297-300	Beam 0037B	132	Beam 0362B	20	Beam 0670B	30
ALPHA--200W	297-300	Beam 0037G	132	Beam 0362W	20	Beam 0670W	30
ALPHA--300W	297-300	Beam 0037W	132	Beam 0406B	10	Beam 0671B	31
ALPHA--400W	297-300	Beam 0038B	133	Beam 0406W	10	Beam 0671W	31
ALPHA--500W	297-300	Beam 0038G	133	Beam 0408	21	Beam 0673B	113
ALPHA--600W	297-300	Beam 0038W	133	Beam 0408B	21	Beam 0673W	113
Banda 25/B/927	85	Beam 0039B	126	Beam 0408W	21	Beam 0674B	114
Banda 25/W/927	85	Beam 0039B-S	127	Beam 0409B	41	Beam 0674W	114
Banda 25/B/930	85	Beam 0039W	126	Beam 0409W	41	Beam 0675B	115
Banda 25/W/930	85	Beam 0039W-S	127	Beam 0410B	12	Beam 0675W	115
Banda 50/B/927	85	Beam 0040B	62	Beam 0410W	12	Beam 0676B	116
Banda 50/W/927	85	Beam 0040W	62	Beam 0449	213 / 214	Beam 0676W	116
Banda 50/B/930	85	Beam 0041B	54	Beam 0449.5DE-OUT	213 / 214	Beam 0677B	117
Banda 50/W/930	85	Beam 0041W	54	Beam 0451	213 / 214	Beam 0677W	117
Banda 60/B/927	85	Beam 0042B	64	Beam 0452	213 / 214	Beam 0685	229 / 230
Banda 60/W/927	85	Beam 0042W	64	Beam 0452.5DE-OUT	213 / 214	Beam 0686	229 / 230
Banda 60/B/930	85	Beam 0043B	65	Beam 0453	213 / 214	Beam 0687	229 / 230
Banda 60/W/930	85	Beam 0043W	65	Beam 0453.5DE-OUT	213 / 214	Beam 0688	229 / 230
Beam 0006	9	Beam 0044B	66	Beam 0454	213 / 214	Beam 0689	229 / 230
Beam 0006B	9	Beam 0044W	66	Beam 0454.5DE-OUT	213 / 214	Beam 0690	229 / 230
Beam 0006W	9	Beam 0045B	76	Beam 0455	213 / 214	Beam 0698/3000K	46
Beam 0008B	237	Beam 0045W	76	Beam 0455.5DE-OUT	213 / 214	Beam 0698/4000K	46
Beam 0009B	238	Beam 0046B	76	Beam 0473	215	Beam 0699/3000K	47
Beam 0010	11	Beam 0046W	76	Beam 0474	215	Beam 0699/4000K	47
Beam 0010B	11	Beam 0047B	76	Beam 0490C/3000K	144	Beam 0702B	104
Beam 0010W	11	Beam 0047W	76	Beam 0490C/4000K	144	Beam 0702W	104
Beam 0011B	18	Beam 0048B	22	Beam 0493C/3000K	145	Beam 0703B	104
Beam 0011W	18	Beam 0048W	22	Beam 0493C/4000K	145	Beam 0703W	104
Beam 0012B	19	Beam 0049	248	Beam 0510	142	Beam 0704-529mm	150
Beam 0012W	19	Beam 0050	147	Beam 0512-2	142	Beam 0704-1129mm	150
Beam 0015B	239	Beam 0051	147	Beam 0513-2	142	Beam 0704-1429mm	150
Beam 0016B	240	Beam 0052	147	Beam 0514/160	225	Beam 0705B	99
Beam 0017.1B	23 / 25	Beam 0103B	97	Beam 0516/160	225	Beam 0705W	99
Beam 0017.1W	23 / 25	Beam 0103W	97	Beam 0517/160	225	Beam 0706B	13
Beam 0017B	25	Beam 0104B	97	Beam 0520	140	Beam 0706W	13
Beam 0017W	25	Beam 0104W	97	Beam 0544B	57	Beam 0707B	14
Beam 0021B	28	Beam 0105B	98	Beam 0544W	57	Beam 0707W	14
Beam 0021W	28	Beam 0105W	98	Beam 0545B	58	Beam 0708B	23
Beam 0022B	42	Beam 0106B	98	Beam 0545W	58	Beam 0708W	23
Beam 0022W	42	Beam 0106W	98	Beam 0551BB	63	Beam 0709B	24
Beam 0023B	42	Beam 0111B	15	Beam 0551BW	63	Beam 0709W	24
Beam 0023W	42	Beam 0111W	15	Beam 0551WB	63	Beam 0710BB	69
Beam 0024B	27	Beam 0112	16	Beam 0551WW	63	Beam 0710BG	69
Beam 0024W	27	Beam 0112W	16	Beam 0552.1W	136	Beam 0710BW	69
Beam 0025B	29	Beam 0114.1B	51 / 94	Beam 0552W	136	Beam 0710WB	69
Beam 0025W	29	Beam 0114.1G	51 / 94	Beam 0603B	101	Beam 0710WG	69
Beam 0026B	52	Beam 0114.1W	51 / 94	Beam 0603W	101	Beam 0710WW	69
Beam 0026W	52	Beam 0114B	96	Beam 0604W	101	Beam 0714.1B	53 / 56 / 98
Beam 0027B	55	Beam 0114W	96	Beam 0605B	102	Beam 0714.1G	53 / 56 / 98
Beam 0027W	55	Beam 0115B	51	Beam 0606B	102	Beam 0714.1W	53 / 56 / 98
Beam 0028B/3000K	94	Beam 0115W	51	Beam 0606W	102	Beam 0714W	100
Beam 0028B/4000K	94	Beam 0150B	236	Beam 0607B	103	Beam 0715W	53
Beam 0028W/3000K	94	Beam 0204	138	Beam 0607W	103	Beam 0717B	67
Beam 0028W/4000K	94	Beam 0205	138	Beam 0608	43	Beam 0718B	70
Beam 0029B/3000K	95	Beam 0206	139	Beam 0609	44	Beam 0719B	68
Beam 0029B/4000K	95	Beam 0207	139	Beam 0610	45	Beam 0720B	71
Beam 0029W/3000K	95	Beam 0208	142	Beam 0611	43	Beam 0721B	41
Beam 0029W/4000K	95	Beam 0209	142	Beam 0612	44	Beam 0721W	41
Beam 0030B	147 / 148	Beam 0211	245	Beam 0613	45	Beam 0722B	72
Beam 0030W	147 / 148	Beam 0212	246	Beam 0615	50 / 146	Beam 0722W	72
Beam 0031B	147 / 148	Beam 0213	247	Beam 0616	50 / 146	Beam 0723B	41
Beam 0031W	147 / 148	Beam 0216	246 / 247	Beam 0617	50 / 146	Beam 0723W	41
Beam 0032	147	Beam 0217	246 / 247	Beam 0618	50 / 146	Beam 0724B	72
Beam 0033	147	Beam 0218	249	Beam 0619	50 / 146	Beam 0724W	72
Beam 0034B	134	Beam 0220	244	Beam 0620	50 / 146	Beam 0725B	73
Beam 0034G	134	Beam 0231B	253	Beam 0623	50 / 146	Beam 0725W	73
Beam 0034W	134	Beam 0241B	252	Beam 0624	50 / 146	Beam 0726B	73
Beam 0035B	131	Beam 0262B	17	Beam 0625	50 / 146	Beam 0726W	73
Beam 0035W	131	Beam 0262W	17	Beam 0626	50 / 146	Beam 0727	207

Beam 0728	207	Beam 1234W	191	Beam 1340	196	Beam 3091	206
Beam 0729W	48	Beam 1235	191	Beam 1341	196	Beam 3092	206
Beam 0730	77 / 78	Beam 1235B	191	Beam 1342	196	Beam 3094	209
Beam 0734B	56	Beam 1235W	191	Beam 1352	189	Beam 3095	209
Beam 0734W	56	Beam 1236	192	Beam 1353 COB	188	Beam 3098	143
Beam 0735B	75	Beam 1236B	192	Beam 1354	188 / 189	Beam 3099	143
Beam 0735W	75	Beam 1236W	192	Beam 1355	188 / 189	Beam 3100	143
Beam 0736B	75	Beam 1237	192	Beam 1356	188 / 189	Beam 3107	39
Beam 0736W	75	Beam 1237B	192	Beam 1357	188 / 189	Beam 3108	39
Beam 0737B	75	Beam 1237W	192	Beam 1360	201	Beam 3109	39
Beam 0737W	75	Beam 1238	192	Beam 1361	201	Beam 3110	39
Beam 0738B	75	Beam 1238B	192	Beam 1362	185	Beam 3111	40
Beam 0738W	75	Beam 1238W	192	Beam 1363	185	Beam 3112	40
Beam 0739B	75	Beam 1239	193	Beam 1364	185	Beam 3113	40
Beam 0739W	75	Beam 1239B	193	Beam 1365	185	Beam 3114	40
Beam 0744B	74	Beam 1240	193	Beam 1366	185	Beam 3118	141
Beam 0744W	74	Beam 1240B	193	Beam 1367	185	Beam 3120	234
Beam 0745B	74	Beam 1246B	34	Beam 1368	185	Beam 3122	234
Beam 0745W	74	Beam 1246W	34	Beam 1369	185	Beam 3130	40
Beam 0746B	61	Beam 1247B	35	Beam 1370	185	Beam 3131	40
Beam 0746W	61	Beam 1247W	35	Beam 1371	185	Beam 3132	40
Beam 0747B	61	Beam 1248B	36	Beam 1380	201	Beam 6008B	135
Beam 0747W	61	Beam 1248W	36	Beam 1381	201	Beam 6008W	135
Beam 0751B	59	Beam 1249B	37	Beam 1382	201	Beam 9006-1W	267
Beam 0751W	59	Beam 1249W	37	Beam 2013	212	Beam 9006-2W	267
Beam 0752B	60	Beam 1253	200	Beam 2015	212	Beam R6010W	128
Beam 0752W	60	Beam 1254 + Beam 1255	200	Beam 2033	204	Beam R6020B-3W	123
Beam 0783	229 / 230	Beam 1256	200	Beam 2034	204	Beam R6020B-3W-S	124
Beam 0784	229 / 230	Beam 1257	201	Beam 2035	204	Beam R6020W-3W	123
Beam 0785	229 / 230	Beam 1263	181	Beam 2036	204	Beam R6020W-3W-S	124
Beam 0786	229 / 230	Beam 1264 COB	176	Beam 3004	231 / 232	Beam R9004	254
Beam 0787	229 / 230	Beam 1267	38	Beam 3005	231 / 232	Beam R9005	255
Beam 0788	229 / 230	Beam 1268B	33	Beam 3006	231 / 232	Beam S0018-514	225
Beam 0789	229 / 230	Beam 1268W	33	Beam 3007	231 / 232	Beam S0018-516	225
Beam 0790	229 / 230	Beam 1269	38	Beam 3008	231 / 232	Beam S0018-517	225
Beam 0841	202	Beam 1270B	33	Beam 3009	231 / 232	Beam S0019-514	225
Beam 0842	203	Beam 1270W	33	Beam 3010	231 / 232	Beam S0019-516	225
Beam 1221	179	Beam 1278	180	Beam 3011	231 / 232	Beam S0019-517	225
Beam 1221 COB	177	Beam 1278 COB	176	Beam 3012	172	Beam S0809	169
Beam 1222	180	Beam 1279	182	Beam 3012 ONE LINE	172	Beam S0810	169
Beam 1222 COB	176	Beam 1279 COB	178	Beam 3013	172	Beam S0813	169
Beam 1223	183	Beam 1280	200	Beam 3014	172	Beam S0814	169
Beam 1223 COB	178	Beam 1281 COB	186	Beam 3015	172	Beam S0815	169
Beam 1224	190	Beam 1282M	187	Beam 3016	172	Beam S0816	170
Beam 1224B	190	Beam 1283	38	Beam 3017	173	Beam S0817	170
Beam 1225	191	Beam 1284	38	Beam 3018	226	Beam S0818-5	170
Beam 1225B	191	Beam 1289	181	Beam 3019	226	Beam S0818-8	170
Beam 1225W	191	Beam 1290	183	Beam 3020	226	Beam S0818-11	170
Beam 1226	192	Beam 1290 COB	178	Beam 3026	216	Beam S0818B-5	170
Beam 1226B	192	Beam 1295	179	Beam 3027	216	Beam S0818B-8	170
Beam 1226W	192	Beam 1295 COB	177	Beam 3028	216	Beam S0818B-11	170
Beam 1227	193	Beam 1296	195	Beam 3047	151	Beam S0819-5	170
Beam 1227B	193	Beam 1298	49	Beam 3048	151	Beam S0819-8	170
Beam 1228	190 / 191 / 192 / 193 / 196	Beam 1302 COB	175	Beam 3049	151	Beam S0819-11	170
		Beam 1306	185	Beam 3053	174	Beam S0823	170
Beam 1228B	190 / 191 / 192 / 193	Beam 1307	185	Beam 3054	174	Beam S0825-5	170
		Beam 1312	185	Beam 3055	174	Beam S0825-8	170
Beam 1229	190 / 191 / 192 / 193 / 196	Beam 1313	185	Beam 3076	210	Beam S0825-12	170
		Beam 1314	185	Beam 3077	210	Beam S0826	170
		Beam 1317	185	Beam 3078	210	Beam S3000	159
Beam 1230	194	Beam 1320 COB	175	Beam 3079	210	Beam S3001	159
Beam 1231	190	Beam 1321 COB	184	Beam 3080	211	Beam S3002	159
Beam 1231B	190	Beam 1331	197	Beam 3081	211	Beam S3003	159
Beam 1232	190	Beam 1332	197	Beam 3082	211	Beam S3021	227
Beam 1232B	190	Beam 1333	197	Beam 3083	211	Beam S3022	227
Beam 1233	191	Beam 1334	197	Beam 3085	205	Beam S3023	227
Beam 1233B	191	Beam 1335	197	Beam 3086	205	Beam S3024	217
Beam 1233W	191	Beam 1336	197	Beam 3087	205	Beam S3025	217
Beam 1234	191	Beam 1337B	198	Beam 3088	205	Beam S3032	219
Beam 1234B	191	Beam 1338	198	Beam 3089	206	Beam S3033	219
		Beam 1339B	198	Beam 3090	206	Beam S3034	219

Beam S3035	219	Beam S6005	263 / 264	PRO-0435 R-W	110	PRO-EZ0448-B	112
Beam S3036	220	Beam S6010	79 / 80 / 81	PRO-0436 L1-B	107	PRO-EZ0448-W	112
Beam S3037	220	Beam S6011	79 / 80 / 81	PRO-0436 L1-W	107	PRO-EZ0449-B	112
Beam S3038	220	Beam S6012	79 / 80 / 81	PRO-0436 L2-B	107	PRO-EZ0449-W	112
Beam S3040	221	Beam S6013	79 / 80 / 81	PRO-0436 L2-W	107	PRO-EZ0449-1.5-B	112
Beam S3041	221	Beam S6014	258	PRO-0436 R1-B	107	PRO-EZ0449-1.5-W	112
Beam S3042	221	Beam S6015	257	PRO-0436 R1-W	107	PRO-EZN147-B	93
Beam S3043	223	Beam S6017	261	PRO-0436 R2-B	107	PRO-EZN147-W	93
Beam S3044	223	Beam S9008	256	PRO-0436 R2-W	107	PRO-EZN148-B	93
Beam S3045	223	E27/6W/108	26	PRO-0437-B	111	PRO-EZN148-W	93
Beam S3046	223	E27/6W/140	26	PRO-0437-W	111	PRO-M142-B	112
Beam S3050-1200	153	E27/7W/3000	26	PRO-0439-B	111	PRO-M142-W	112
Beam S3050-1200-P	153	GU10/5/2700 GLASS	26	PRO-0439-W	111	PRO-M436L-B	106
Beam S3050-1500	153	GU10/5/3000 GLASS	26	PRO-045K-B	112	PRO-M436L-W	106
Beam S3050-1500-P	153	GU10/5/2700 PL	26	PRO-045K-W	112	PRO-M436R-B	106
Beam S3051-1300	155	GU10/5/3000 PL	26	PRO-0610-B	105	PRO-M436R-W	106
Beam S3051-1300-P	155	Lentigini 48V/BB/927	86	PRO-0610-W	105	PRO-M438-B	111
Beam S3051-1500	155	Lentigini 48V/BB/927/DALI	86	PRO-0620-B	105	PRO-M438-W	111
Beam S3051-1500-P	155	Lentigini 48V/BB/930	86	PRO-0620-W	105	PRO-M510-B	106
Beam S3052-1245	156	Lentigini 48V/BB/930/DALI	86	PRO-0630-B	105	PRO-M510-W	106
Beam S3052-1525	156	Lentigini 48V/BG/927	86	PRO-0630-W	105	PRO-N110-B-PT	88
Beam S3056	226 / 227	Lentigini 48V/BG/927/DALI	86	PRO-4230V-B	109	PRO-N110-W-PT	88
Beam S3057	226 / 227	Lentigini 48V/BG/930	86	PRO-4230V-W	109	PRO-N120-B-PT	88
Beam S3058	164	Lentigini 48V/BG/930/DALI	86	PRO-C100-B	108	PRO-N120-W-PT	88
Beam S3059	164	Lentigini 48V/BW/927	86	PRO-C100-W	108	PRO-N130-B-PT	88
Beam S3060	165	Lentigini 48V/BW/927/DALI	86	PRO-CS04300-B	106	PRO-N130-W-PT	88
Beam S3061	167	Lentigini 48V/BW/930	86	PRO-CS04300-W	106	PRO-N131L-B	91
Beam S3062	167	Lentigini 48V/BW/930/DALI	86	PRO-CSN20-B	93 / 119	PRO-N131L-W	91
Beam S3064	167	Lentigini 48V/WB/927	86	PRO-CSN20-W	93 / 119	PRO-N131R-B	91
Beam S3065	167	Lentigini 48V/WB/927/DALI	86	PRO-D631 L-B	108	PRO-N131R-W	91
Beam S3067	167	Lentigini 48V/WB/930	86	PRO-D631 L-W	108	PRO-N132-B	91
Beam S3068	167	Lentigini 48V/WB/930/DALI	86	PRO-D631 R-B	108	PRO-N132-W	91
Beam S3070 /R/D 60	168	Lentigini 48V/WG/927	86	PRO-D631 R-W	108	PRO-N133-B	91
Beam S3070 /R/D 90	168	Lentigini 48V/WG/927/DALI	86	PRO-D633-B	108	PRO-N133-W	91
Beam S3070 /R/D 120	168	Lentigini 48V/WG/930	86	PRO-D633-W	108	PRO-N135-B	91
Beam S3071 SE	165	Lentigini 48V/WG/930/DALI	86	PRO-D634-B	106	PRO-N135-W	91
Beam S3072	228	Lentigini 48V/WW/927	86	PRO-D634-W	106	PRO-N135FL-B	92
Beam S3073	228	Lentigini 48V/WW/927/DALI	86	PRO-D635 L-B	110	PRO-N135FL-W	92
Beam S3074	228	Lentigini 48V/WW/930	86	PRO-D635 L-W	110	PRO-N135FR-B	92
Beam S3075	228	Lentigini 48V/WW/930/DALI	86	PRO-D635 R-B	110	PRO-N135FR-W	92
Beam S3115	159	MWLPV-20/24	199	PRO-D635 R-W	110	PRO-N135S-B	92
Beam S3116	159	MWLPV-35/24	199	PRO-D636 L1-B	107	PRO-N135S-W	92
Beam S3117	15	MWLPV-60/24	199	PRO-D636 L1-W	107	PRO-N139-B	91
Beam S3121	233 / 234	MWLPV-100/24	199	PRO-D636 L2-B	107	PRO-N139-W	91
Beam S3123	233 / 234	MWLPV-150/24	199	PRO-D636 L2-W	107	PRO-N147-B	93
Beam S3124	233 / 234	MWELG-240/24	199	PRO-D636 R1-B	107	PRO-N147-W	93
Beam S3125	233 / 234	MWHLGB-320/24	199	PRO-D636 R1-W	107	PRO-N148-B	93
Beam S3126	233 / 234	MWHLG-480/24	199	PRO-D636 R2-B	107	PRO-N148-W	93
Beam S3127	217	PRO-0222-B	106	PRO-D636 R2-W	107	PRO-N149-B	121
Beam S3129-020	265 / 266	PRO-0222-W	106	PRO-D637-B	111	PRO-N149-W	121
Beam S3129-040	265 / 266	PRO-0410-B	105	PRO-D637-W	111	PRO-N15K-B	93 / 121
Beam S3129-060	265 / 266	PRO-0410-W	105	PRO-D639-B	111	PRO-N15K-W	93 / 121
Beam S3129-020A	265 / 266	PRO-0418SK-B	109	PRO-D639-W	111	PRO-PS200W-B	93
Beam S3129-040A	265 / 266	PRO-0418SK-W	109	PRO-D680-B	106	PRO-PS200W-W	93
Beam S3201	250	PRO-0420-B	105	PRO-D680-W	106	PRO-RN110-B-PT	90
Beam S3202	250	PRO-0420-W	105	PRO-DN110-B-PT	89	PRO-RN110-W-PT	90
Beam S3203	250	PRO-0430-B	105	PRO-DN110-W-PT	89	PRO-RN120-B-PT	90
Beam S3204	250	PRO-0430-W	105	PRO-DN120-B-PT	89	PRO-RN120-W-PT	90
Beam S3205	250	PRO-0431 L-B	108	PRO-DN120-W-PT	89	PRO-RN130-B-PT	90
Beam S3206	250	PRO-0431 L-W	108	PRO-DN130-B-PT	89	PRO-RN130-W-PT	90
Beam S3207	250	PRO-0431 R-B	108	PRO-DN130-W-PT	89	PRO-RN132-B	91
Beam S3208	251	PRO-0431 R-W	108	PRO-DN132-B	91	PRO-RN132-W	91
Beam S3209	251	PRO-0432-B	108	PRO-DN132-W	91	PRO-RN133-B	91
Beam S3210	251	PRO-0432-W	108	PRO-DN135FL-B	92	PRO-RN133-W	91
Beam S3211	251	PRO-0433-B	108	PRO-DN135FL-W	92	PRO-RN135FL-B	92
Beam S3212	251	PRO-0433-W	108	PRO-DN135FR-B	92	PRO-RN135FL-W	92
Beam S3213	251	PRO-0434-B	106	PRO-DN135FR-W	92	PRO-RN135FR-B	92
Beam S6001	262	PRO-0434-W	106	PRO-DN135S-B	92	PRO-RN135FR-W	92
Beam S6002	260	PRO-0435 L-B	110	PRO-DN135S-W	92	PRO-RN135S-B	92
Beam S6003	259	PRO-0435 L-W	110	PRO-EZ0447-B	112	PRO-RN135S-W	90
Beam S6004	263 / 264	PRO-0435 R-B	110	PRO-EZ0447-W	112	PRO-S110-B	118

PRO-S110-W	118	Sottile 40/WW/927	83
PRO-S120-B	118	Sottile 40/WW/930	83
PRO-S120-W	118	Sottile 50/BB/927	84
PRO-S130-B	118	Sottile 50/BB/930	84
PRO-S130-W	118	Sottile 50/BG/927	84
PRO-S131 L-B	119	Sottile 50/BG/930	84
PRO-S131 L-W	119	Sottile 50/BW/927	84
PRO-S131 R-B	119	Sottile 50/BW/930	84
PRO-S131 R-W	119	Sottile 50/WB/927	84
PRO-S132-B	119	Sottile 50/WB/930	84
PRO-S132-W	119	Sottile 50/WG/927	84
PRO-S133-B	119	Sottile 50/WG/930	84
PRO-S133-W	119	Sottile 50/WW/927	84
PRO-S134-B	120	Sottile 50/WW/930	84
PRO-S134-W	120	VEGA 150W	276
PRO-S135 L-B	120	VEGA 300W	277
PRO-S135 L-W	120	VEGA 450W	278
PRO-S135 R-B	120	VEGA 600W	279
PRO-S135 R-W	120	VEGA 750W	280
PRO-S136 L1-B	120	VEGA 900W	281
PRO-S136 L1-W	120	VEGA 1200W	282
PRO-S136 L2-B	120	VEGA 1500W	283
PRO-S136 L2-W	120		
PRO-S136 R1-B	120		
PRO-S136 R1-W	120		
PRO-S136 R2-B	120		
PRO-S136 R2-W	120		
PRO-S137-B	121		
PRO-S137-W	121		
PRO-S140A-B	121		
PRO-S140A-W	121		
REGULUS 300/400W	286		
REGULUS 600/700/800W	287		
RIGEL 120W	290		
RIGEL 240W	291		
RIGEL 360W	292		
RIGEL 480W	293		
RIGEL 720W	294		
RIGEL 960W	295		
Salina 48V/BB/927	87		
Salina 48V/BG/927	87		
Salina 48V/BW/927	87		
Salina 48V/WB/927	87		
Salina 48V/WG/927	87		
Salina 48V/WW/927	87		
SIRIUS 720W	270		
SIRIUS 1080W	271		
SIRIUS 1440W	272		
SIRIUS 1800W	273		
Sottile 25/BB/927	82		
Sottile 25/BB/930	82		
Sottile 25/BG/927	82		
Sottile 25/BG/930	82		
Sottile 25/BW/927	82		
Sottile 25/BW/930	82		
Sottile 25/WB/927	82		
Sottile 25/WB/930	82		
Sottile 25/WG/927	82		
Sottile 25/WG/930	82		
Sottile 25/WW/927	82		
Sottile 25/WW/930	82		
Sottile 40/BB/927	83		
Sottile 40/BB/930	83		
Sottile 40/BG/927	83		
Sottile 40/BG/930	83		
Sottile 40/BW/927	83		
Sottile 40/BW/930	83		
Sottile 40/WB/927	83		
Sottile 40/WB/930	83		
Sottile 40/WG/927	83		
Sottile 40/WG/930	83		

TEAM NOVILUM

Manager	Danny Geuens	+32 495 30 79 34	danny.geuens@novilum.com
Sales manager	Kris Vandyck	+32 494 61 82 28	kris.vandyck@novilum.com
Sales	Davy Brebels	+32 472 19 70 77	davy.brebels@novilum.com
Sales	Patrick Houben	+32 478 23 29 59	patrick.houben@novilum.com
Accounting and invoicing	Peggy Huijberts	+32 89 21 79 58	boekhouding@novilum.com
Administration	Mieke de Haas	+32 89 21 79 58	mieke.de.haas@novilum.com
Orders and information	Goele Joachims	+32 89 21 79 58	info@novilum.com
Warehouse	Ronny Schepers	+32 89 21 79 58	info@novilum.com

DIGITAL PRODUCT AND PRICE INFORMATION

Scan this QR code to access our latest price lists, technical data sheets, digital catalog, and more:



GENERAL INFORMATION

All information in this catalogue is for information purposes only.

Our company reserves the right to make changes to its products of any kind at any time without prior notice.

The images in this catalogue are for information purposes only and may differ in colour, shape and technical details.

The reproduction of this catalogue or parts thereof is prohibited.

Subject to printing and/or typographical errors.

Our general terms and conditions of sale apply to all our offers, transactions and deliveries.

**Lichtplan nodig?
Onze adviseur komt
graag bij je langs!**

**Bel of mail
voor meer informatie:**

Tel.: +32 89 21 79 58
info@novilum.com
www.novilum.com



Locatie:
Industrieterrein Vostert
Kipdorpstraat 54
3960 Bree
België
Tel.: +32 89 21 79 58